


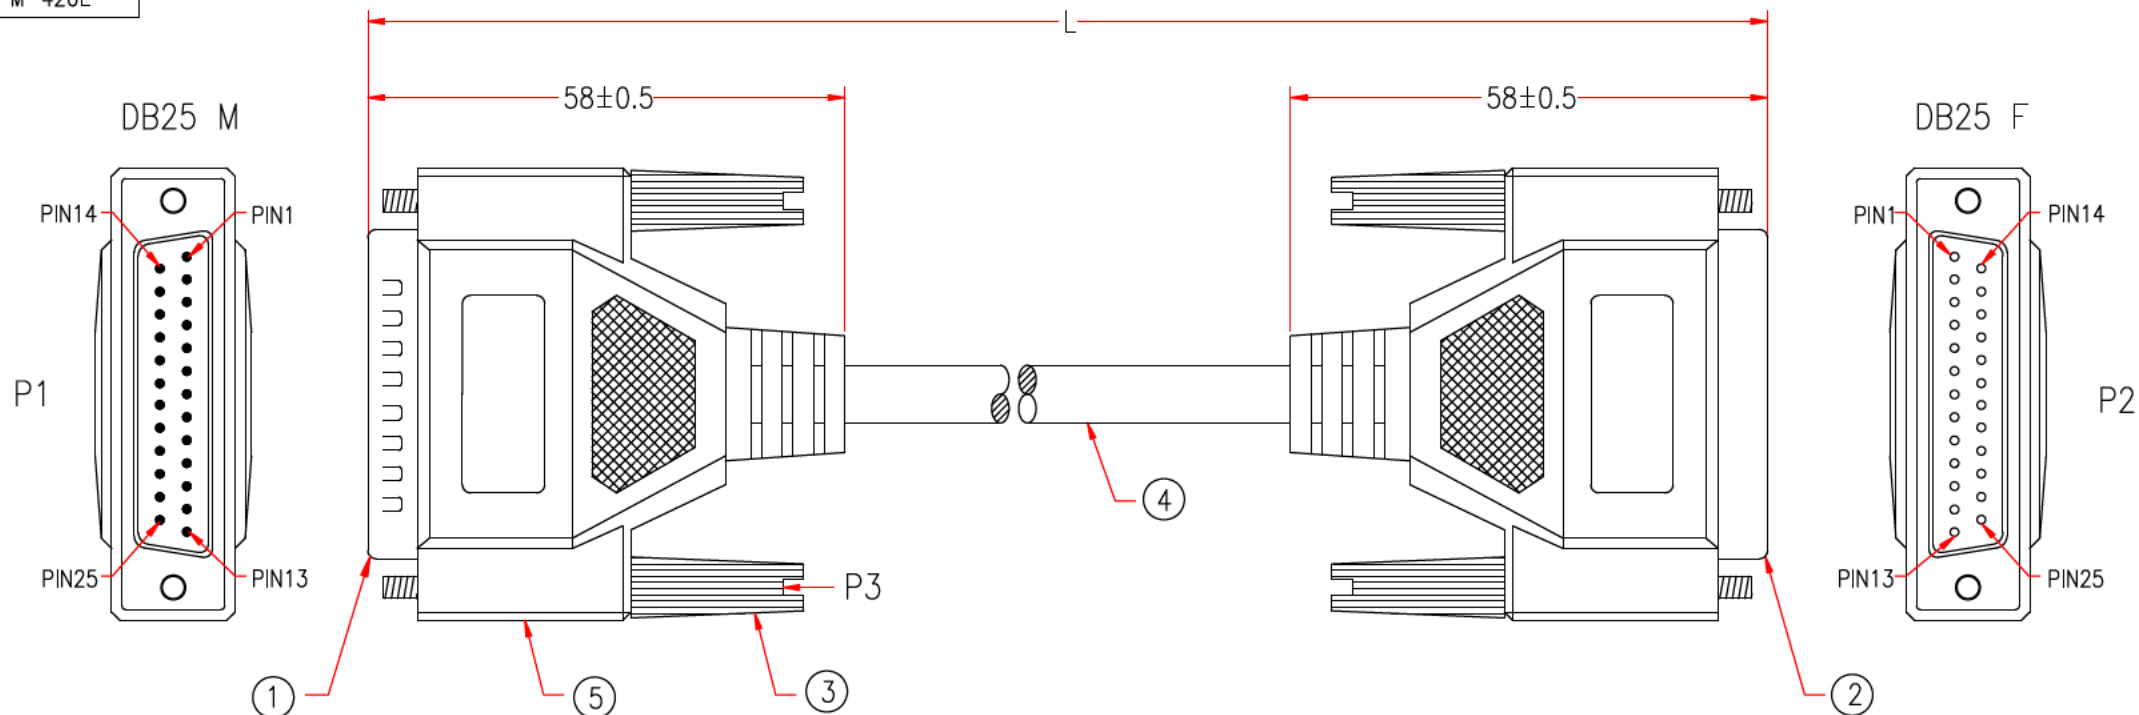

* NOTE: All relevant materials are complied with RoHS directive .

2006									
P1		P2		P1		P2			
BLACK	1	1	BROWN/BLACK	14	14				
BROWN	2	2	RED/BLACK	15	15				
RED	3	3	ORANGE/BLACK	16	16				
ORANGE	4	4	YELLOW/BLACK	17	17				
YELLOW	5	5	GREEN/BLACK	18	18				
GREEN	6	6	BLUE/BLACK	19	19				
BLUE	7	7	PURPLE/BLACK	20	20				
PURPLE	8	8	GRAY/BLACK	21	21				
GRAY	9	9	WHITE/BLACK	22	22				
WHITE	10	10	PINK/BLACK	23	23				
PINK	11	11	LIGHT GREEN/BLACK	24	24				
LIGHT GREEN	12	12	LIGHT BLUE/BLACK	25	25				
LIGHT BLUE	13	13	SHIELD		SHIELD				

5	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 30\text{mm}$	H7A001-0304K09	2	M304
	ALUMINUM FOIL 33*110mm	A6MA05-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	NON-UL 25C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BEIGE, DRAWING No. EMAL2825C-095	H5BL38-0304B01	Lmm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0095	4	M95
2	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE01-0277U09	1	M277
1	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE09-0277U09	1	M277
No.	DESCRIPTION		Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm$\uparrow$ $\pm 40\text{mm}$	
CHECKED	HU			
DRAWING	ZHU			
DATE	05/JULY/19	ITEM NO.	2006	UNIT:mm