


P1: M-113A

Customer NO: NO:1

P2: M-Y113A
M-113A

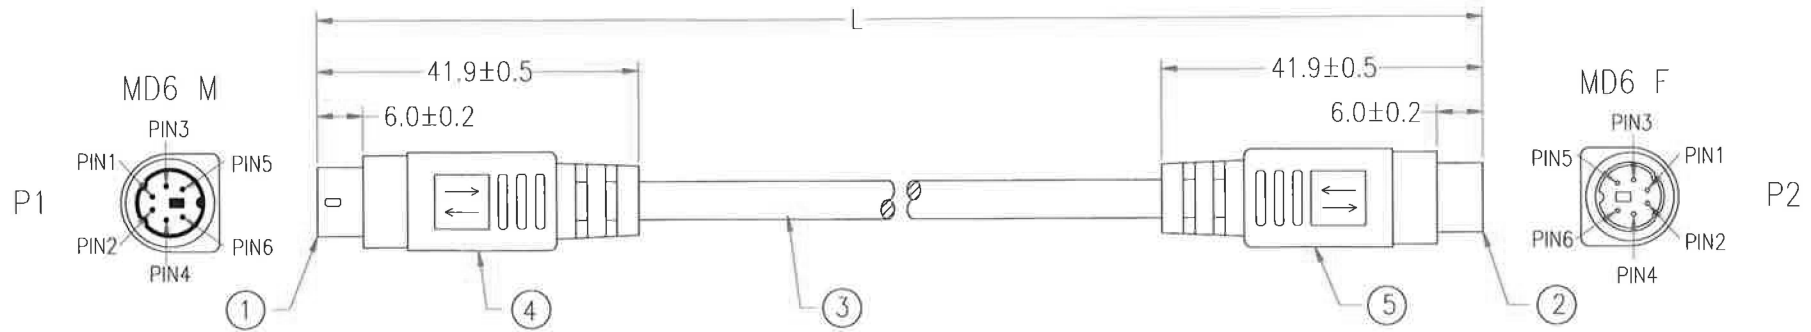

*NOTE: ALL relevant materials are complied with ROHS directive

1032			
P1		P2	
1	—————	1	BROWN
2	—————	2	RED
3	—————	3	ORANGE
4	—————	4	YELLOW
5	—————	5	GREEN
6	—————	6	BLACK
SHIELD	—————	SHIELD	

5	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	NON-UL 6C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2806C-034	H5BL21-0304B01	Xmm	M304
2	MINI DIN 6 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE01-0108K09	1	M108
1	MINI DIN 6 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE16-0108K09	1SET	M108
No.	DESCRIPTION		Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DRAWING	CAI			
DATE	11/JUN/19	ITEM NO.	6/6MF-X	UNIT:mm

REV.2 2019.07.11 MODIFY & UPDATE ITEM NO.

REV.1 2011.01.28 MODIFY COLOR CODE

CHECKED

