


P1:	M-113A
P2:	M-Y1428A
	M-1428A

Customer No:	No.1
--------------	------

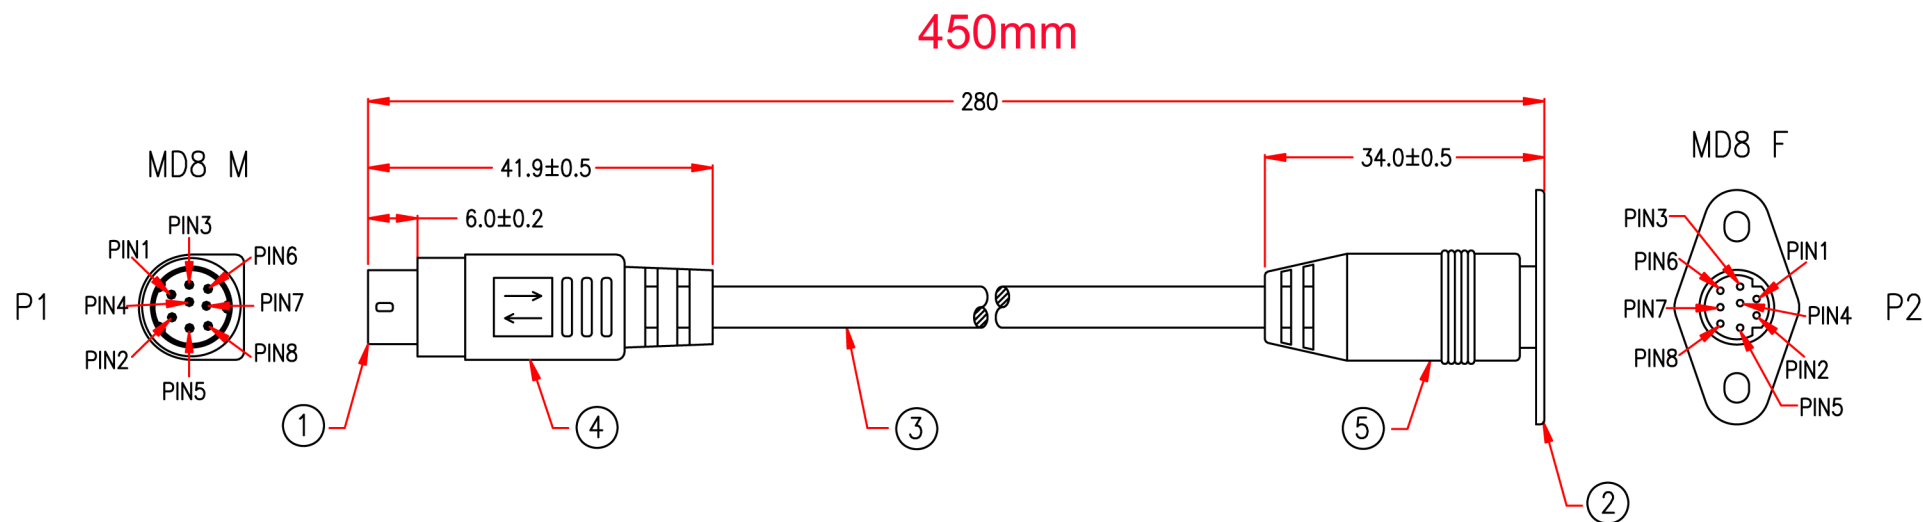

1078-4

P1	P2
1	1 BROWN
2	2 RED
3	3 ORANGE
4	4 YELLOW
5	5 GREEN
6	6 BLUE
7	7 PURPAL
8	8 BLACK
SHIELD	SHIELD

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 8\text{mm}$	A4HA23-0959	1	M7777
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	NON UL 8C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BLACK, DRAWING No. EMAL2808C-045	H5BL27-0304K09	260mm	M304
2	MINI DIN8 FEMALE WITH METAL SLICE, BLACK INSULATOR, RHOMBUS TYPE		1SET	M367
1	MINI DIN 8 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EG08-0108	1SET	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		8FFL/8M-045	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm $\uparrow$ $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	XIAO		
DATE	21/FEB/19	ITEM NO.	1078-4
UNIT:mm		UNIT:mm	

CHECKED