


P1,P2:	M-Y141A
	M-175A

Customer No: No.1

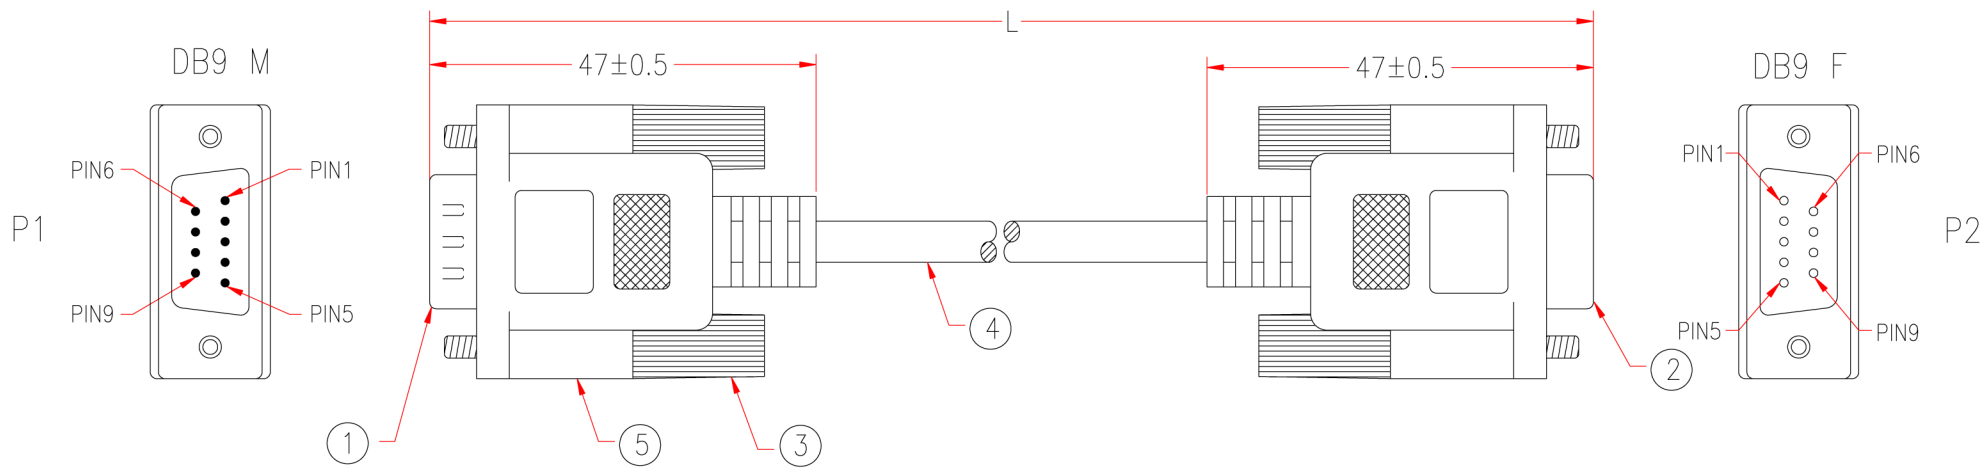

NOTE: All relevant materials are complied with RoHS directive .

1823-3			
P1		P2	
1	—————	1	BLACK
2	—————	2	BROWN
3	—————	3	RED
4	—————	4	ORANGE
5	—————	5	YELLOW
6	—————	6	GREEN
7	—————	7	BLUE
8	—————	8	PURPLE
9	—————	9	GREY
SHIELD	—————	SHIELD	

5	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 18\text{mm}$	2	M743
	ALUMINUM FOIL 25*60mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC GREY		M304
4	UL2464 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET GREY, DRAWING No. EMAL2809C-052	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 40mm, GREY	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	NIE		

DATE	29/NOV/10	ITEM NO.	1823-3	UNIT:mm	
------	-----------	----------	--------	---------	--

CHECKED