


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/18/94	H.T.

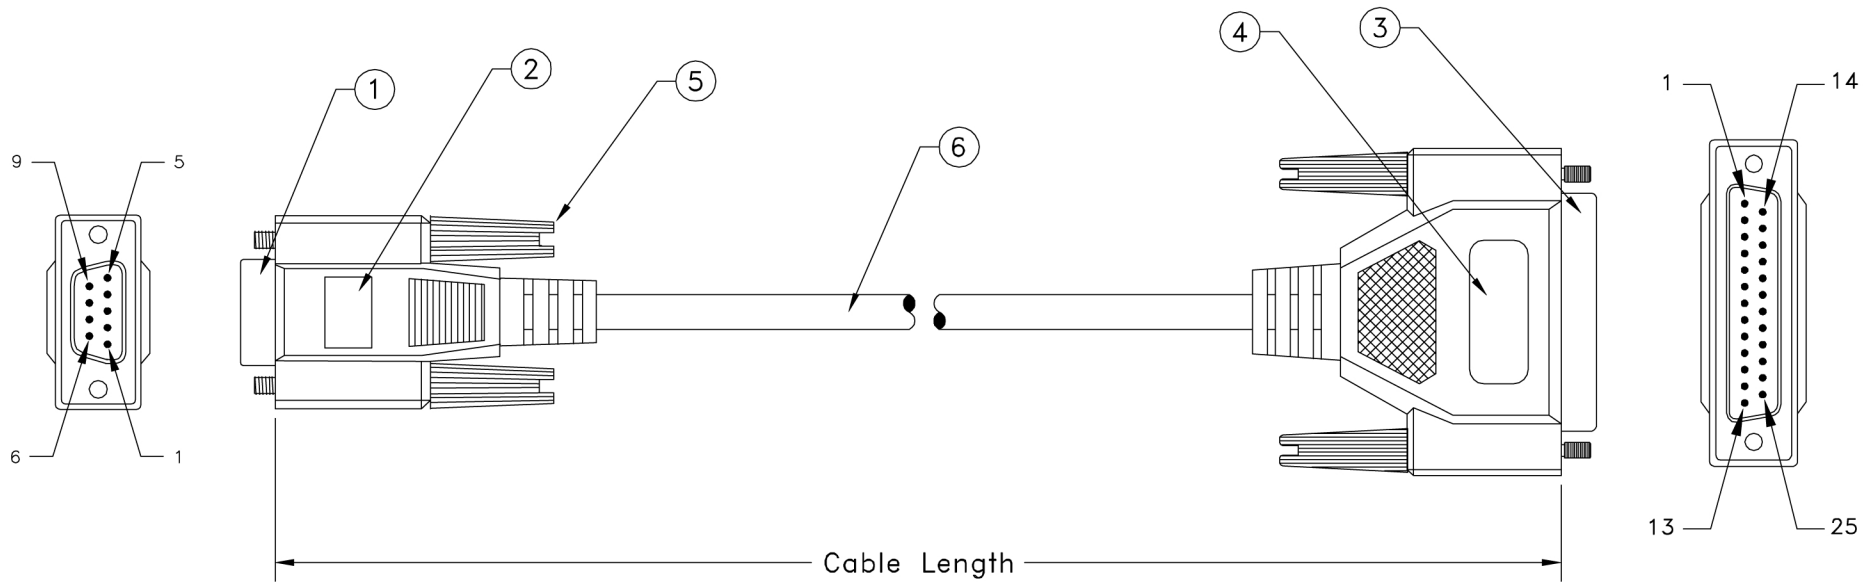

Pin Assignment

DB 9 Female	DB25 Female
1	4
2	5
3	2
4	3
5	6
6	7
7	20
8	8
9	22
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 8 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 25 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED:
 1. DIMENSION ARE IN INCHS
 2. TOLERANCES:
 DECIMALES X.XX ±0.25
 3. DO NOT SCALE DRAWING
 4. REMOVE ALL BURRS AND
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
 THIS DRAWING AND/OR INFORMATION OR
 SUBJECT MATTER CONTAINED HEREIN,
 SHALL NOT BE USED, COPIED OR
 DISSEMINATED IN ANY MANNER, OR FOR
 ANY PURPOSE, OTHER THAN AS
 EXPRESSLY STATED BY
 COMTOP Enterprises Corp.

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	05/18/94
CHECKED	
CUSTOMER APPROVAL	

9/25FF-1.8			
TITLE Null Modem Cable Assembly (DB9F / DB25F, 8C, Molded)			
SIZE	DWG NO.	PART NO.	REV.
	10D1-214	10D1-214XX	A
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1	DF 1