


P1:	M-Y139C
	M-139C
P2:	M-Y222E
	M-222D
P3:	M-426E

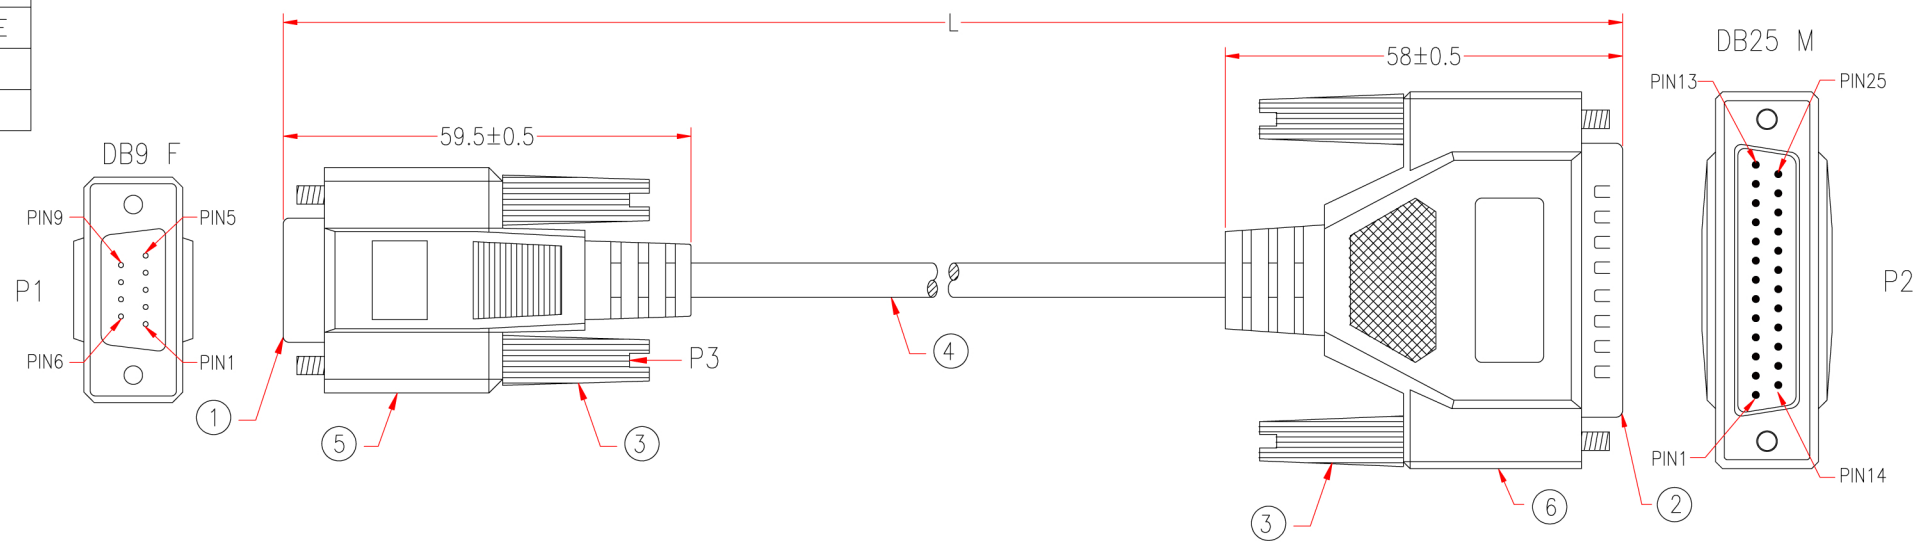

\*NOTE: ALL relevant materials are complied with ROHS directive

1040-4			
P1		P2	
1	—————	7	BROWN
		8	
2	—————	3	RED
3	—————	2	ORANGE
4	—————	6	YELLOW
5	—————	5	GREEN
6	—————	4	BLUE
7	—————	1	BLACK
8	—————		
SHIELD	—————	SHIELD	

6	BLACK PVC TUBE $\phi$ 3.0*30mm	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*110mm	A6MA05-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
5	BLACK PVC TUBE $\phi$ 3.0*22mm	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	NON-UL 7C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2807C-041	H5BL24-0304B01	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0095	4	M95
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE14-0108	1	M108
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA03-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED **2013.02.25**

CHECKED **陳瑞雯**

DRAWING **PENG**

# 9/25FM-xN2

Cable Length Unless Other Spec.  
Tolerances:  
0 ~200mm ±10mm  
201~1000mm ±20mm  
1001 ~1500mm ±25mm  
1501~2100mm ±30mm  
2100mm↑ ±40mm

DATE	25/FEB/13	ITEM NO.	1040-4	UNIT:mm	
------	-----------	----------	--------	---------	--

CHECKED