


P1:	M-Y139C
	M-139H
P2:	M-Y222E
	M-222D
P3:	M-426E

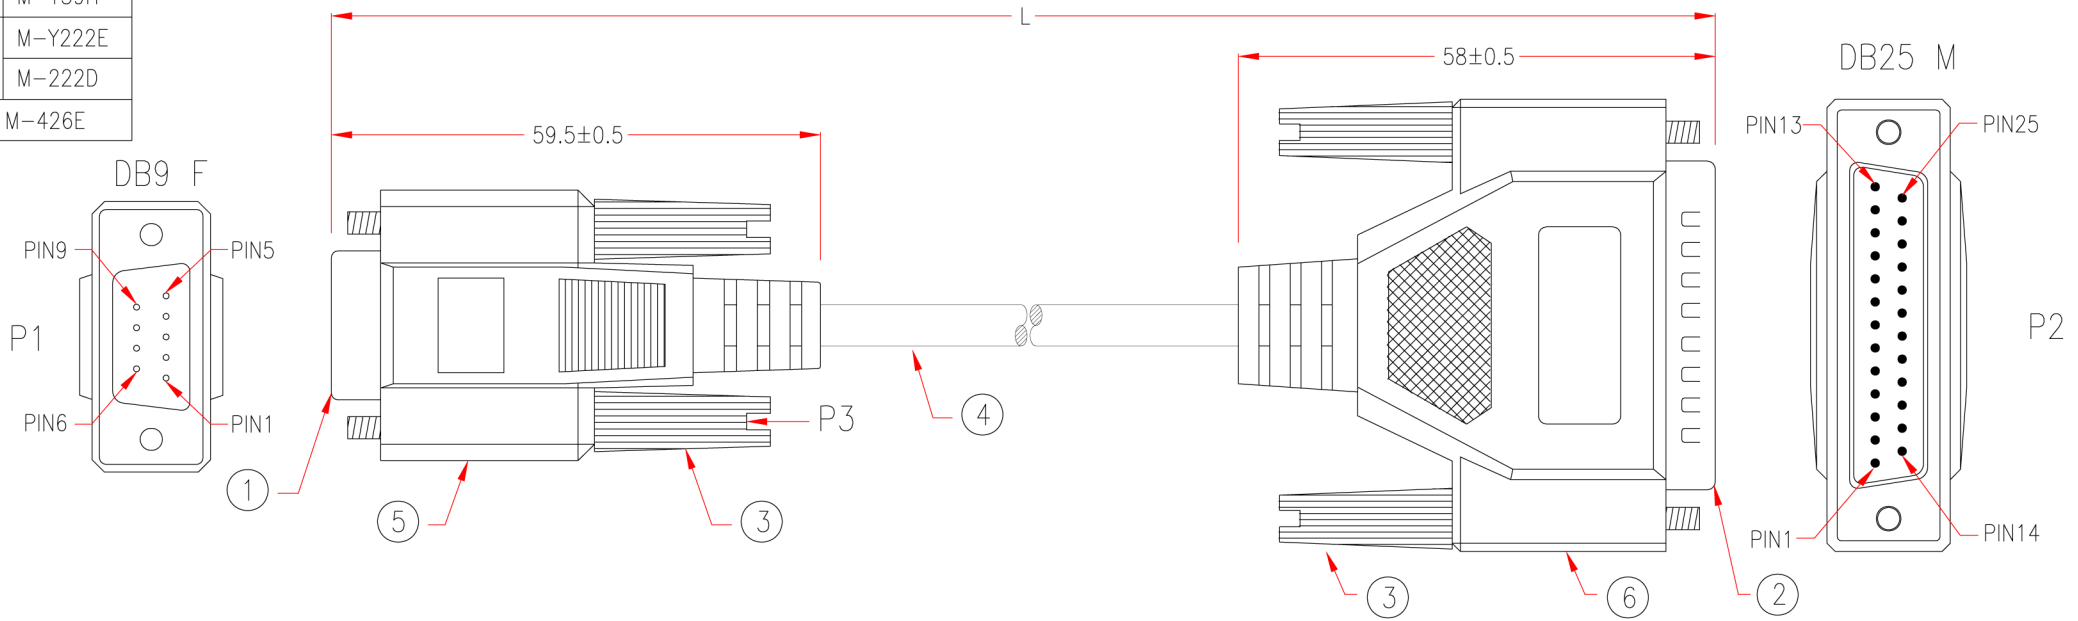

\*NOTE: ALL relevant materials are complied with ROHS directive

1068-3

P1	P2	
1	4	BROWN
	5	
2	2	RED
3	3	ORANGE
4	6	YELLOW
5	7	GREEN
6	20	BLUE
7	8	PURPLE
8		
9	22	BLACK
SHIELD	SHIELD	

No.	DESCRIPTION		Q'TY	Supplier
6	BLACK PVC TUBE $\phi$ 3.0*30mm	H7A001-0304	1	M304
	ALUMINUM FOIL 33*110mm	A6MA05-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	BLACK PVC TUBE $\phi$ 3.0*22mm	H7A001-0304	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	NON-UL 8C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BLACK, DRAWING No. EMAL2808C-045	H5FL13-0304K09	L-10mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK	A6AA30-0095	4	M95
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1AE13-0108	1	M108
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1AA02-0108	1	M108

APPROVED		<h1>9/25FM-xN</h1>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU				
DRAWING	WEI				
DATE	25/JAN/15	ITEM NO.	M717-57	UNIT:mm	