


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/18/94	H.T.

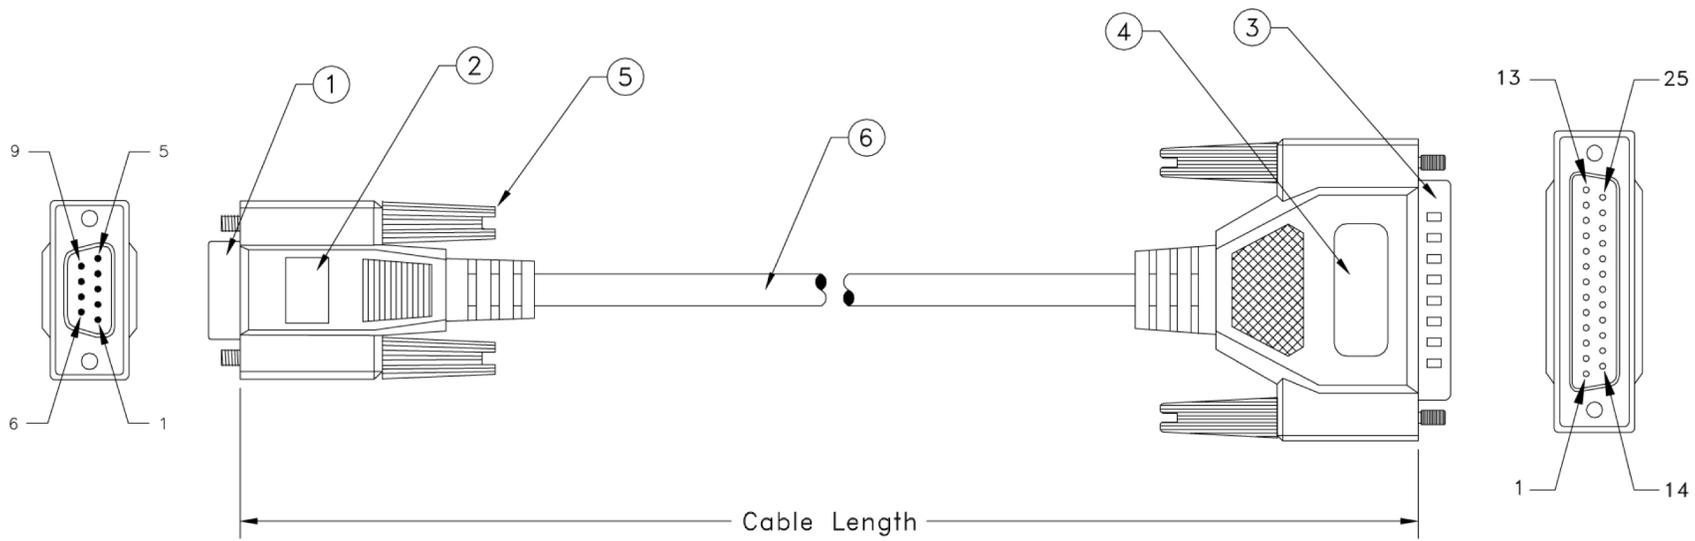

**Pin Assignment**

DB 9 Female	DB25 Male
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 9 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 25 Pin Male W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.

**CABLE ASSEMBLY PARTS LIST**

UNLESS OTHERWISE SPECIFIED:  
 1. DIMENSIONS ARE IN INCHES  
 2. TOLERANCES:  
 DECIMALS X.XX ±0.25  
 3. DO NOT SCALE DRAWING  
 4. REMOVE ALL BURRS AND  
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT  
 THIS DRAWING AND/OR INFORMATION OR  
 SUBJECT MATTER CONTAINED HEREIN,  
 SHALL NOT BE USED, COPIED OR  
 DISSEMINATED IN ANY MANNER, OR FOR  
 ANY PURPOSE, OTHER THAN AS  
 EXPRESSLY STATED BY  
 CDMTOP Enterprises Corp.

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	05/18/94
CHECKED	
CUSTOMER APPROVAL	

<b>9/25FM-xS</b>			
TITLE <b>Molded AT Modem Cable Assembly (DB9 F / DB25 M, 9C)</b>			
SIZE	DWG NO.	PART NO.	REV.
	10D1-023	10D1-023XX	A
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1	OF 1