


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/18/94	H.T.

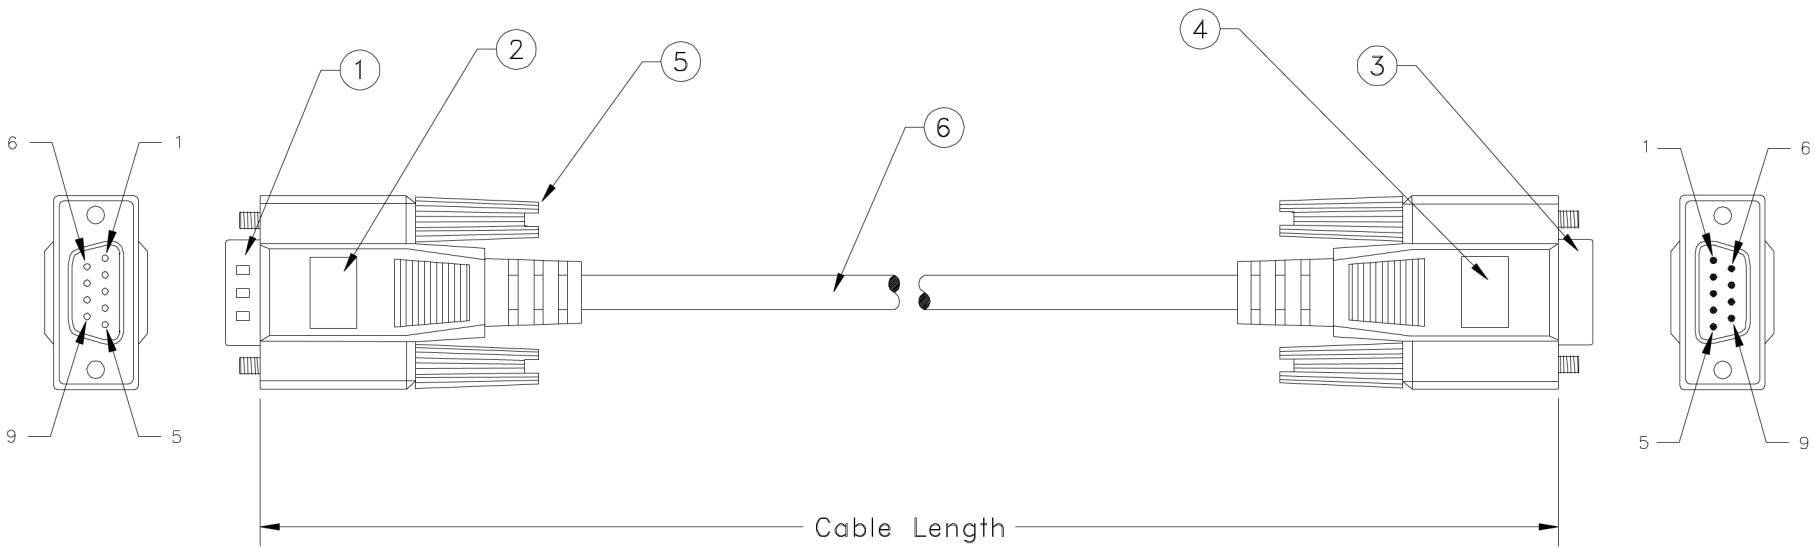

Pin Assignment

DB 9 Male	DB 9 Female
1	4
2	3
3	2
4	6
5	5
7	8
8	7
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 7 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Male W/Gold Plating Contacts	1	PCS.
CABLE ASSEMBLY PARTS LIST			

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER
	R.F.Q. NO.
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY COMTOP Enterprises Corp.	DRAWN DATE Howie Tseng 05/18/94
	CHECKED
CUSTOMER APPROVAL	

9/9MF-2N			
TITLE Null Modem Cable Assembly (DB9, M/F, 7C, Molded)			
SIZE	DWG NO.	PART NO.	REV. A
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1	DF 1