


P1,P2:	M-Y141A
	M-175A
P3	M-419A

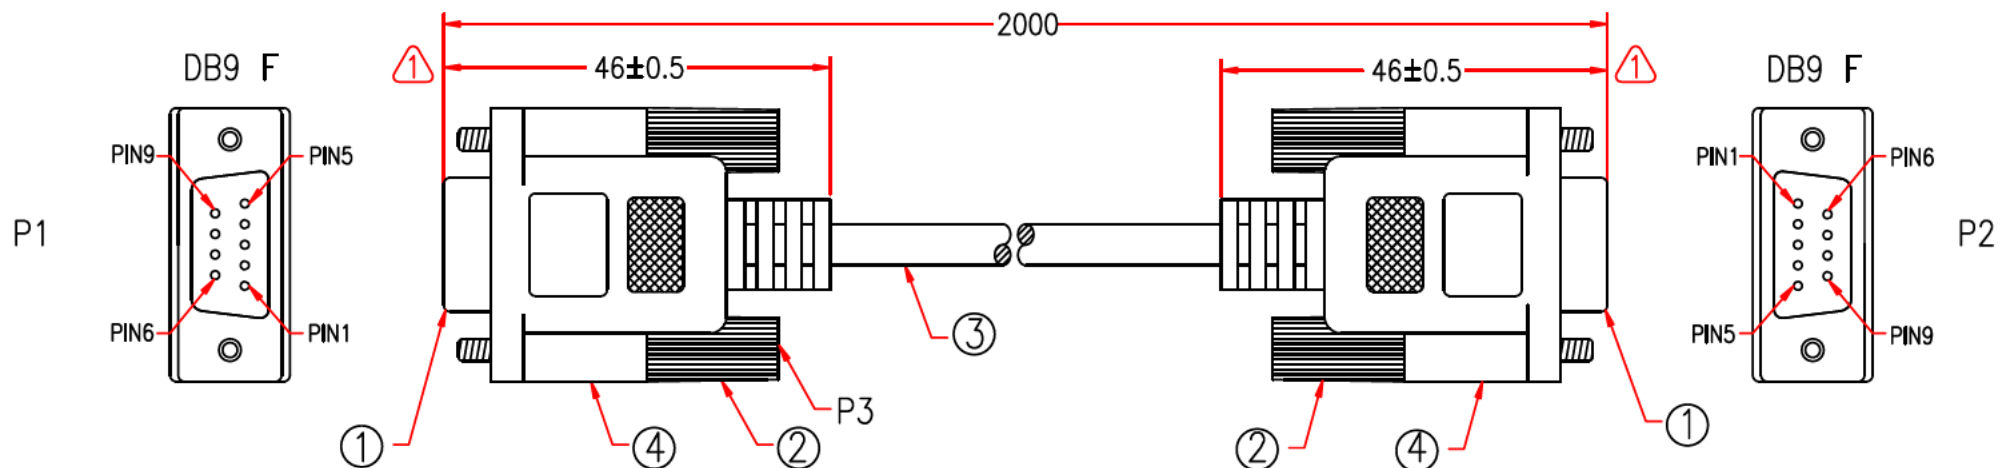

1C20			
P1		P2	⚠
1	—————	1	BROWN
2	—————	2	RED
3	—————	3	ORANGE
4	—————	4	YELLOW
5	—————	5	GREEN
6	—————	6	BLUE
7	—————	7	PURPLE
8	—————	8	GRAY
9	—————	9	BLACK
SHIELD	—————	SHIELD	

⚠ MARKING:

E300060 ⚡ AWM 2464 28AWG 80°C 300V VW-1  
 c⚡ E300060 I/II A 80°C 300V FT1

NOTE: All relevant materials are complied with RoHS directive .

4	BLACK HEAT SHRINK TUBE $\phi$ 3.0*18mm	A4HA10-0959	2	M959
	ALUMINUM FOIL 25*60mm	A6MA03-0523	2	M523
	MOLDED PE COLOR TRANSPARENT	A5BA14-7777		M7777
	MOLDED PVC GREY	H1BF01-0304K09		M304
3	UL2464 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET GREY, DRAWING No. EMAL2809C-052	H5FL14-0304B01	1980mm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 40mm, GREY	H1RB01-0304G09 A6AA19-0095	4	M95
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0277U09	2	M277
No.	DESCRIPTION		Q'TY	Supplier



APPROVED			
CHECKED	HU		
DESIGNER	ZHU		
DRAWING	DAN		
DATE	29/DEC/21	ITEM NO.	
			UNIT:mm

Cable Length Unless Other Spec.  
 Tolerances:  
 0 ~200mm ±10mm  
 201~1000mm ±20mm  
 1001 ~1500mm ±25mm  
 1501~2100mm ±30mm  
 2100mm↑ ±40mm

