


P1,P2:	M-Y141A
	M-175A
P3:	M-419A

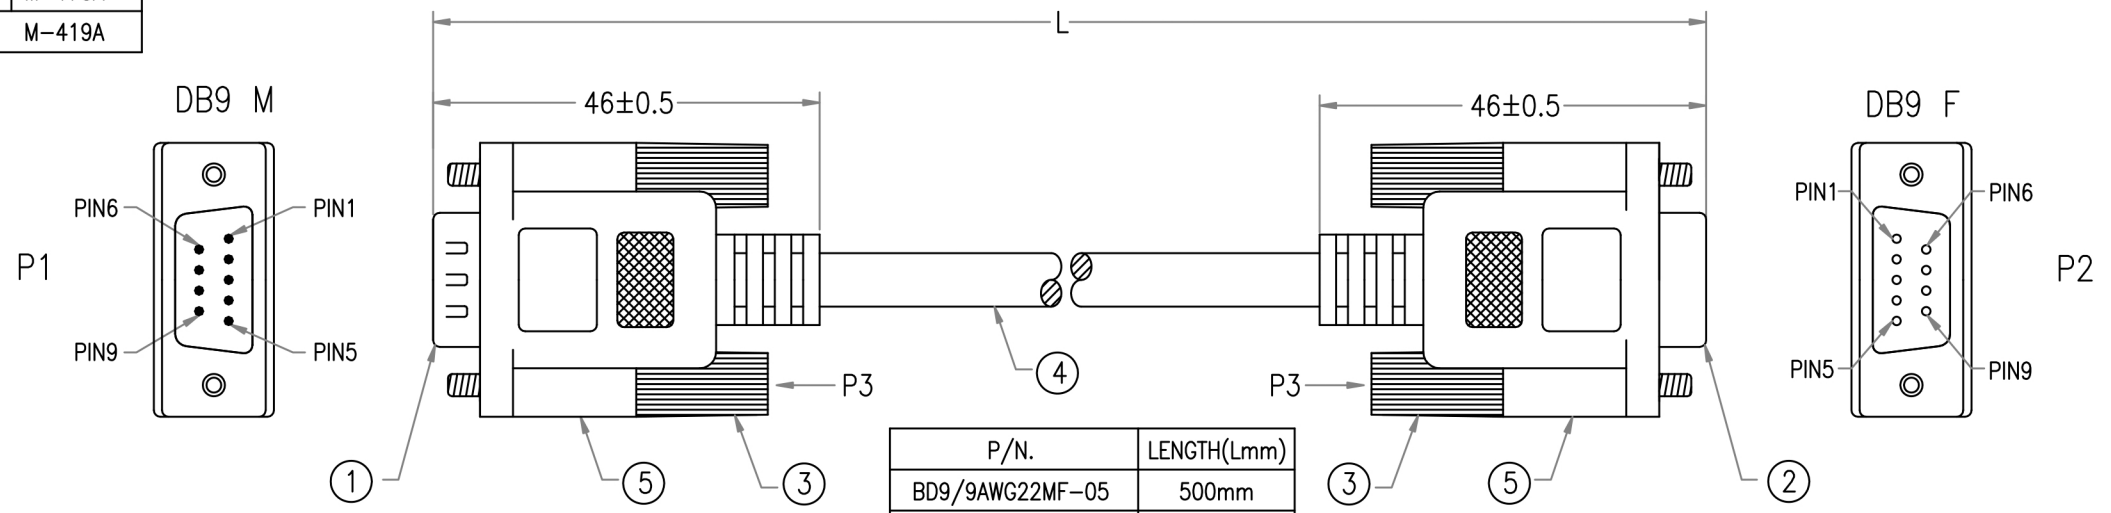

P/N.	LENGTH(Lmm)
BD9/9AWG22MF-05	500mm
BD9/9AWG22MF-1	1000mm
BD9/9AWG22MF-2	2000mm
BD9/9AWG22MF-3	3000mm
BD9/9AWG22MF-5	5000mm
BD9/9AWG22MF-7.5	7500mm
BD9/9AWG22MF-10	10000mm

MARKING:  
 E300060 兎 AWM 2464 22AWG 80°C 300V VW-1  
 CSA 204790 I/II A 80°C 300V FT1 MSL

NOTE: All relevant materials are complied with RoHS directive .

1003-28	
P1	P2
1	1 BROWN
2	2 RED
3	3 ORANGE
4	4 YELLOW
5	5 GREEN
6	6 BLUE
7	7 PURPLE
8	8 GREY
9	9 BLACK
SHIELD	SHIELD

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE $\phi$ 3.0*15mm	2	M304
	ALUMINUM FOIL 25*60mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M7777
	MOLDED PVC BLACK		M304
4	UL2464 9C 22AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.5mm, JACKET BLACK, DRAWING No. EMAL2209C-708	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 36mm, BLACK	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M277
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M277

APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm			
CHECKED	HU				
DRAWING	XIAO				
DATE	05/DEC/19	ITEM NO.	BD9/9AWG22MF-xx	UNIT:mm	

CHECKED