


| | |
|-----|-------------------|
| P1: | M-Y141A M-175A |
| P2: | M-Y192A M-192A |
| P3: | M-419A |
| P4: | M-494A |

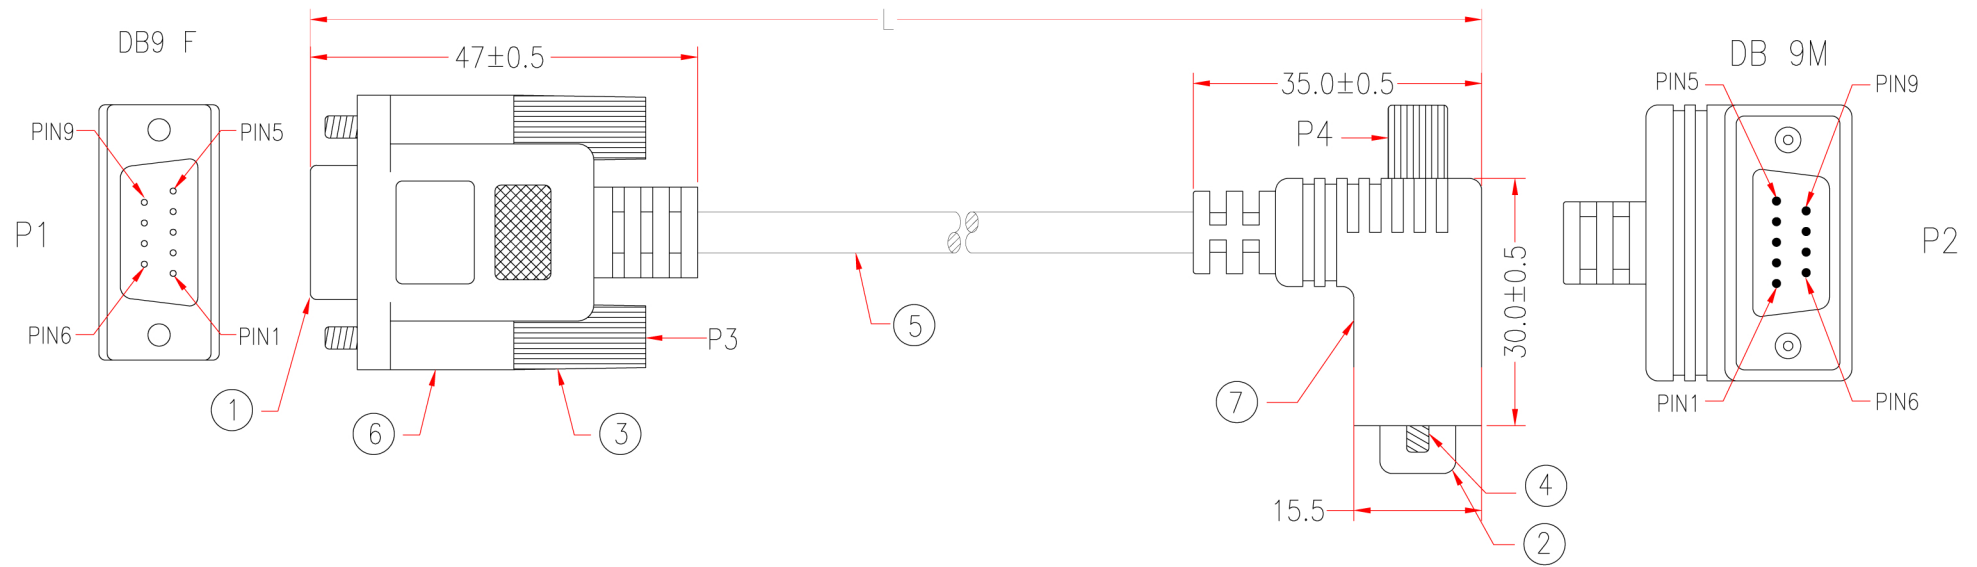

* NOTE: All relevant materials are complied with RoHS directive .

| 1C24-1 | | | |
|--------|-------|--------|--------|
| P1 | | P2 | |
| 1 | ————— | 1 | BLACK |
| 2 | ————— | 2 | BROWN |
| 3 | ————— | 3 | RED |
| 4 | ————— | 4 | ORANGE |
| 5 | ————— | 5 | YELLOW |
| 6 | ————— | 6 | GREEN |
| 7 | ————— | 7 | BLUE |
| 8 | ————— | 8 | GREY |
| 9 | ————— | 9 | WHITE |
| SHIELD | ————— | SHIELD | |

| 7 | BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$ | H7A001-0304K09 | 1 | M304 |
|-----|--|----------------|------|----------|
| | COPPER FOIL 33*65mm | A6LA11-0309 | 1 | M309 |
| | MOLDED PE COLOR TRANSPARENT | A5BA02-0280 | | M280 |
| | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 6 | BLACK PVC TUBE $\phi 3.0 \times 15\text{mm}$ | H7A001-0304K09 | 1 | M959 |
| | COPPER FOIL 25*60mm | A6LA08-0309 | 1 | M309 |
| | MOLDED PE COLOR TRANSPARENT | A5BA02-0280 | | M280 |
| | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 5 | UL2464 9C 22AWG, ALUM-MYLAR AND COPPER BRAID FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BLACK, DRAWING No. EMAB2209C-976 | H5FF09-0304K09 | Lmm | M304 |
| 4 | MOLDED THUMBSCREW #4-40, LENGTH 42mm BLACK | A6AA23-0095 | 2 | M95 |
| 3 | MOLDED THUMBSCREW #4-40, LENGTH 36mm, BLACK | A6AA19-0095 | 2 | M95 |
| 2 | DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR | A1AA17-0108 | 1 | M108 |
| 1 | DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR | A1AA03-0108 | 1 | M108 |
| No. | DESCRIPTION | | Q'TY | Supplier |

| | | | |
|----------|-----|---------------------|--|
| APPROVED | | BD99MAP3F-xx | Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm |
| CHECKED | HU | | |
| DRAWING | LIU | | |

| | | | | | |
|------|-----------|----------|--------|---------|--|
| DATE | 08/JUN/15 | ITEM NO. | 1C24-1 | UNIT:mm | |
|------|-----------|----------|--------|---------|--|

CHECKED