


P1:	M-Y141A M-175A
P2:	M-Y192A M-192A
P3:	M-419A
P4:	M-494A

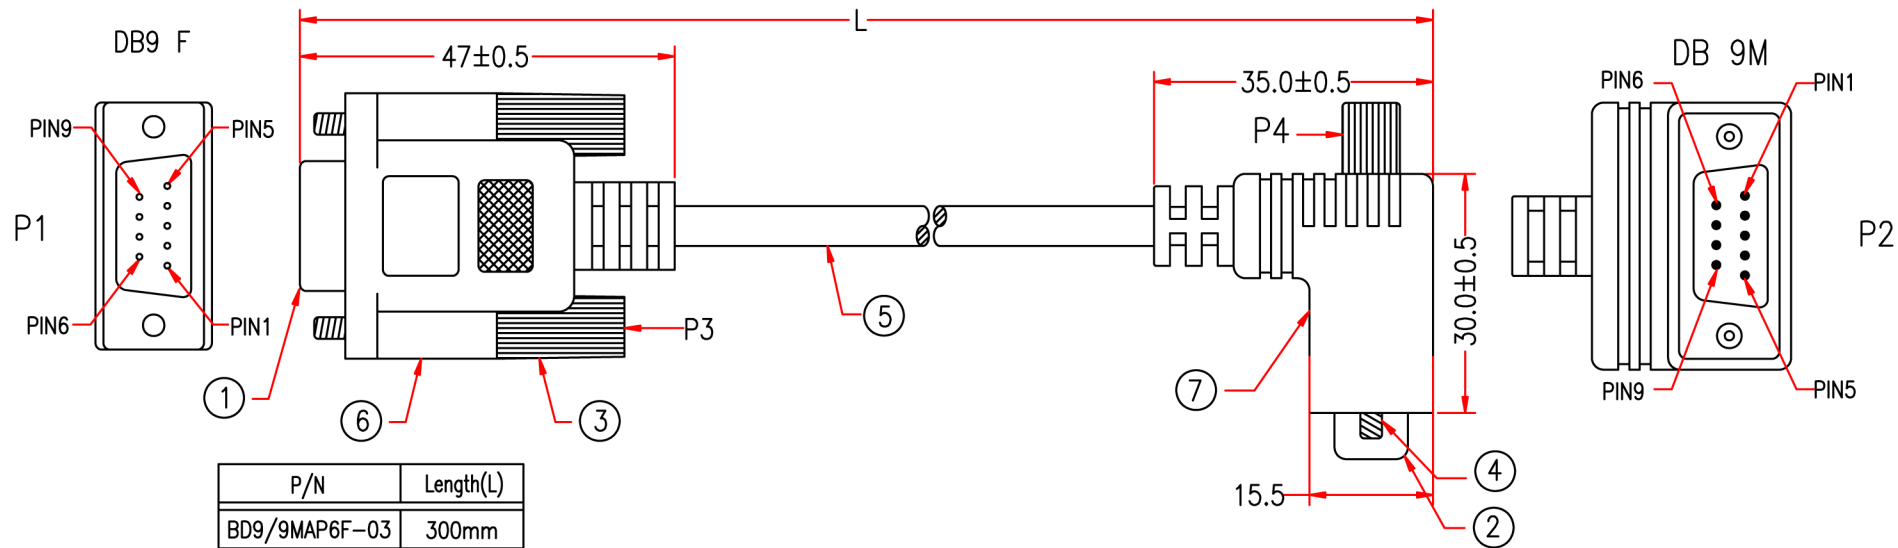

P/N	Length(L)
BD9/9MAP6F-03	300mm
BD9/9MAP6F-1	1000mm
BD9/9MAP6F-2	2000mm
BD9/9MAP6F-3	3000mm
BD9/9MAP6F-5	5000mm

MARKING: E300060 ⚡ AWM 2464 22AWG 80°C 300V VW-1
CSA 204790 I/II A 80°C 300V FT1 MSL

1C24-2	
P1	P2
1	1 BLACK
2	2 BROWN
3	3 RED
4	4 ORANGE
5	5 YELLOW
6	6 GREEN
7	7 BLUE
8	8 GREY
9	9 WHITE
SHIELD	SHIELD

* NOTE: All relevant materials are complied with RoHS directive .

7	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	COPPER FOIL 33*65mm	A6LA11-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
6	BLACK PVC TUBE $\phi 3.0 \times 15\text{mm}$	H7A001-0304K09	1	M959
	COPPER FOIL 25*60mm	A6LA08-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	UL2464 9C 22AWG, ALUM-MYLAR AND COPPER BRAID FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BLACK, DRAWING No. EMAB2209C-976	H5FF09-0304K09	Lmm	M304
4	MOLDED THUMBSCREW #4-40, LENGTH 42mm BLACK	A6AA23-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 36mm, BLACK	A6AA19-0095	2	M95
2	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA12-0108U09	1	M108
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0108U09	1	M108

No.	DESCRIPTION		Q'TY	Supplier
APPROVED				
CHECKED	HU			
DRAWING	XIAO			
DATE	27/SEP/18	ITEM NO.	BD9/9MAP6F-xx	

Cable Length Unless Other Spec.
Tolerances:
 0 ~ 200mm ±10mm
 201 ~ 1000mm ±20mm
 1001 ~ 1500mm ±25mm
 1501 ~ 2100mm ±30mm
 2100mm↑ ±40mm

CHECKED

