


P1:	M-Y141A
	M-175A
P2:	M-Y192A
	M-192A
P3:	M-494A

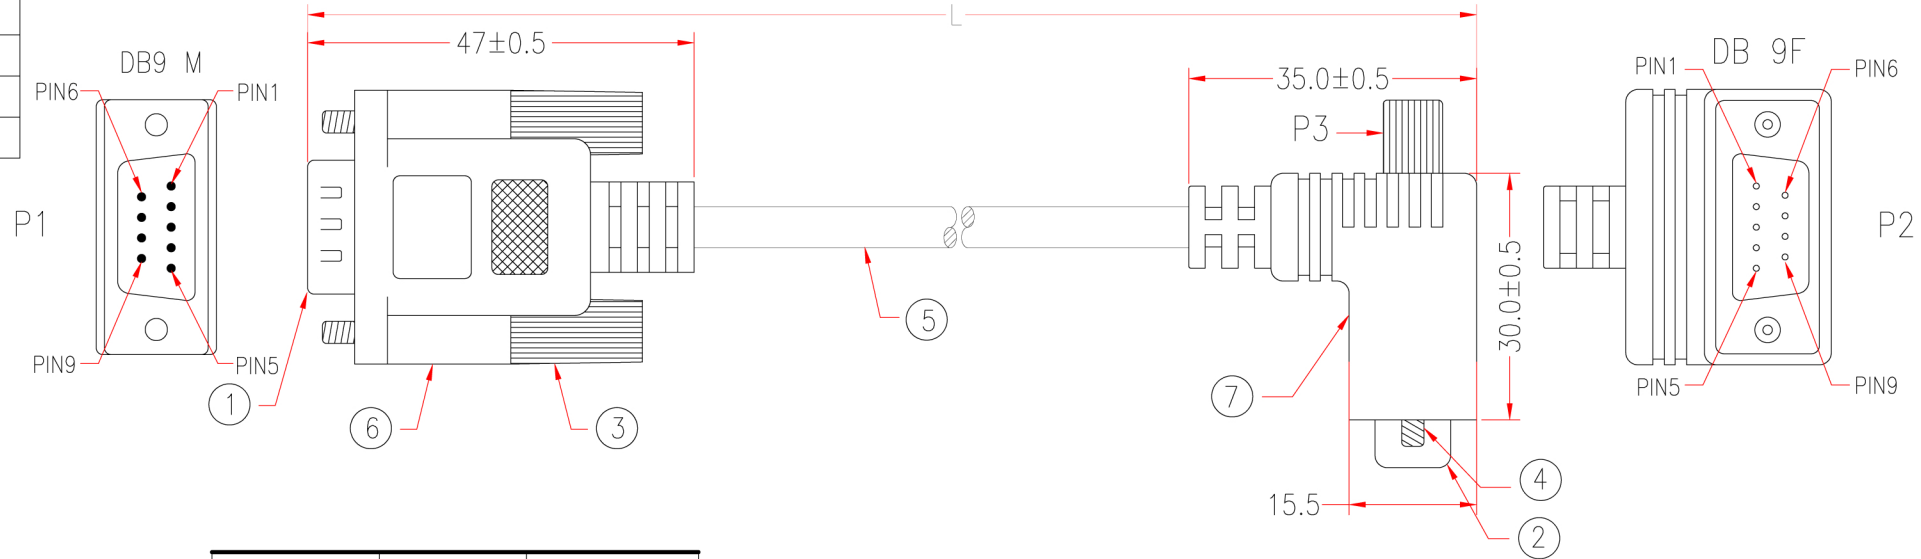

P/N	Length(L)	Length(X)
M708-52-1M	1000mm	1000mm
M708-52-2M	2000mm	2000mm
M708-52-3M	3000mm	3000mm

* NOTE: All relevant materials are complied with RoHS directive .

1C24			
P1		P2	
1	—————	1	BLACK
2	—————	2	BROWN
3	—————	3	RED
4	—————	4	ORANGE
5	—————	5	YELLOW
6	—————	6	GREEN
7	—————	7	BLUE
8	—————	8	GREY
9	—————	9	WHITE
SHIELD	—————	SHIELD	

No.	DESCRIPTION	Q'TY	Supplier
7	BLACK HEAT SHRINK TUBE ϕ 3.0*22mm	1	M743
	COPPER FOIL 33*65mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
6	BLACK HEAT SHRINK TUBE ϕ 3.0*15mm	1	M743
	COPPER FOIL 25*60mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
5	MOLDED PVC BLACK		M304
	UL2464 9C 22AWG, ALUM-MYLAR AND COPPER BRAID FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BLACK, DRAWING No. EMAB2209C-976	Xmm	M304
4	MOLDED THUMBSCREW #4-40, LENGTH 43mm BLACK	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 40mm, BLACK	2	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108

APPROVED		BD9/9MFAP3-x	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	JUDY		

CHECKED