


P1:	M-Y141A
	M-175A
P2:	M-Y128A
	M-128A

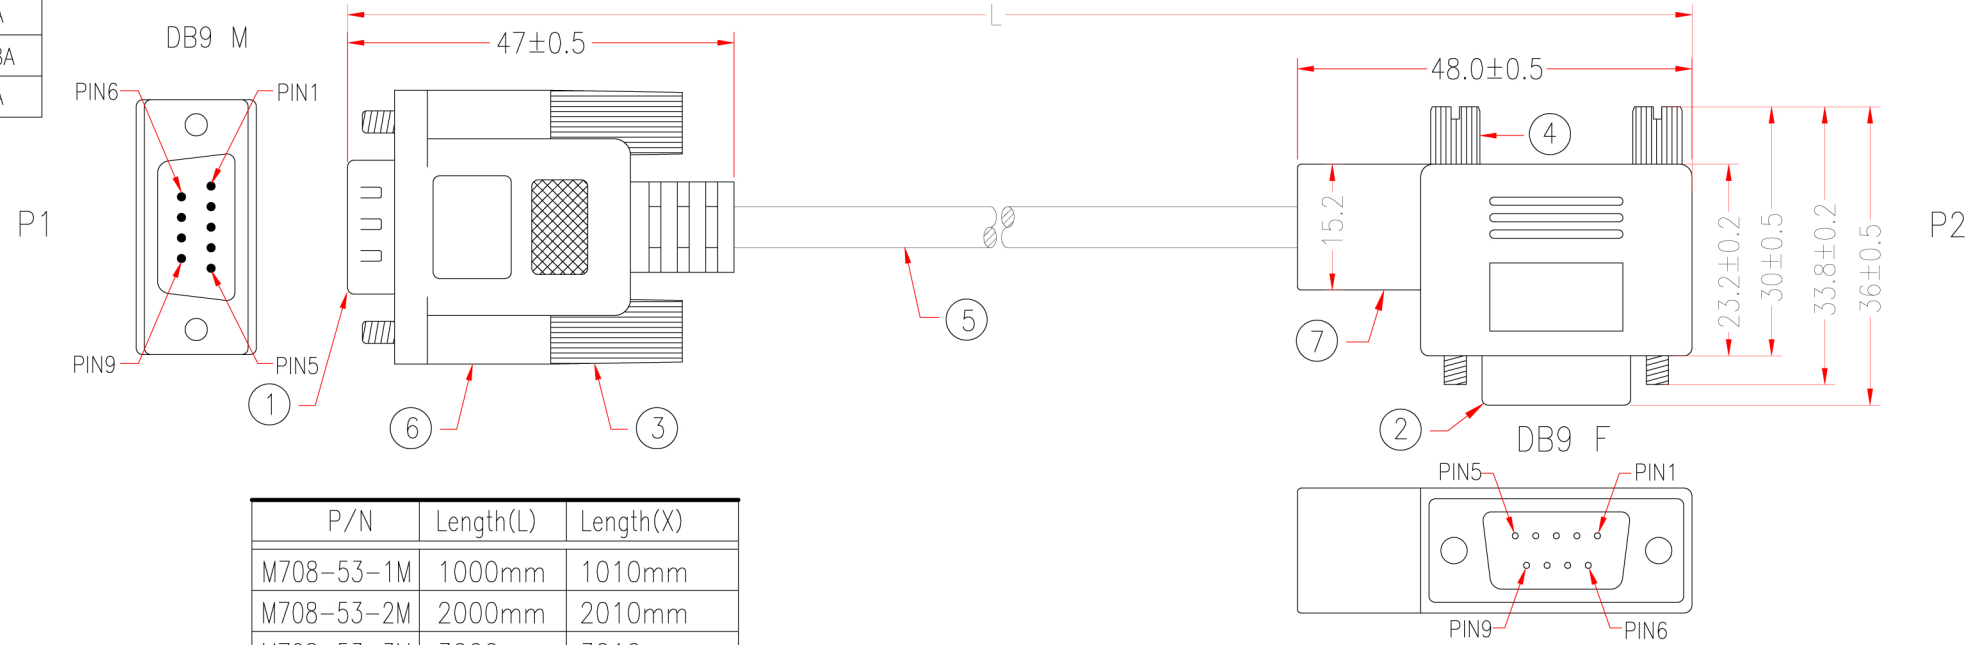

\* NOTE: All relevant materials are complied with RoHS directive .

1C25			
P1		P2	
1	—————	1	BLACK
2	—————	2	BROWN
3	—————	3	RED
4	—————	4	ORANGE
5	—————	5	YELLOW
6	—————	6	GREEN
7	—————	7	BLUE
8	—————	8	GREY
9	—————	9	WHITE
SHIELD	—————	SHIELD	

No.	DESCRIPTION	Q'TY	Supplier
7	BLACK HEAT SHRINK TUBE $\phi$ 3.0*22mm	1	M743
	COPPER FOIL 30*65mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
6	BLACK HEAT SHRINK TUBE $\phi$ 3.0*15mm	1	M743
	COPPER FOIL 25*60mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
5	UL2464 9C 22AWG, ALUM-MYLAR AND COPPER BRAID FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BLACK, DRAWING No. EMAB2209C-976	Xmm	M304
4	SCREW #4-40, LENGTH 6.0*33.8mm	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 40mm, BLACK	2	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108

APPROVED		<b>BD9/9MFAP5-x</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	JUDY		
DATE	08/JAN/10	ITEM NO.	1C25
CHECKED		UNIT:mm	