


P1:	M-Y141A	Customer No:	
	M-175A		
P2:	M-Y128A		
	M-128A		
P3: M-419A			

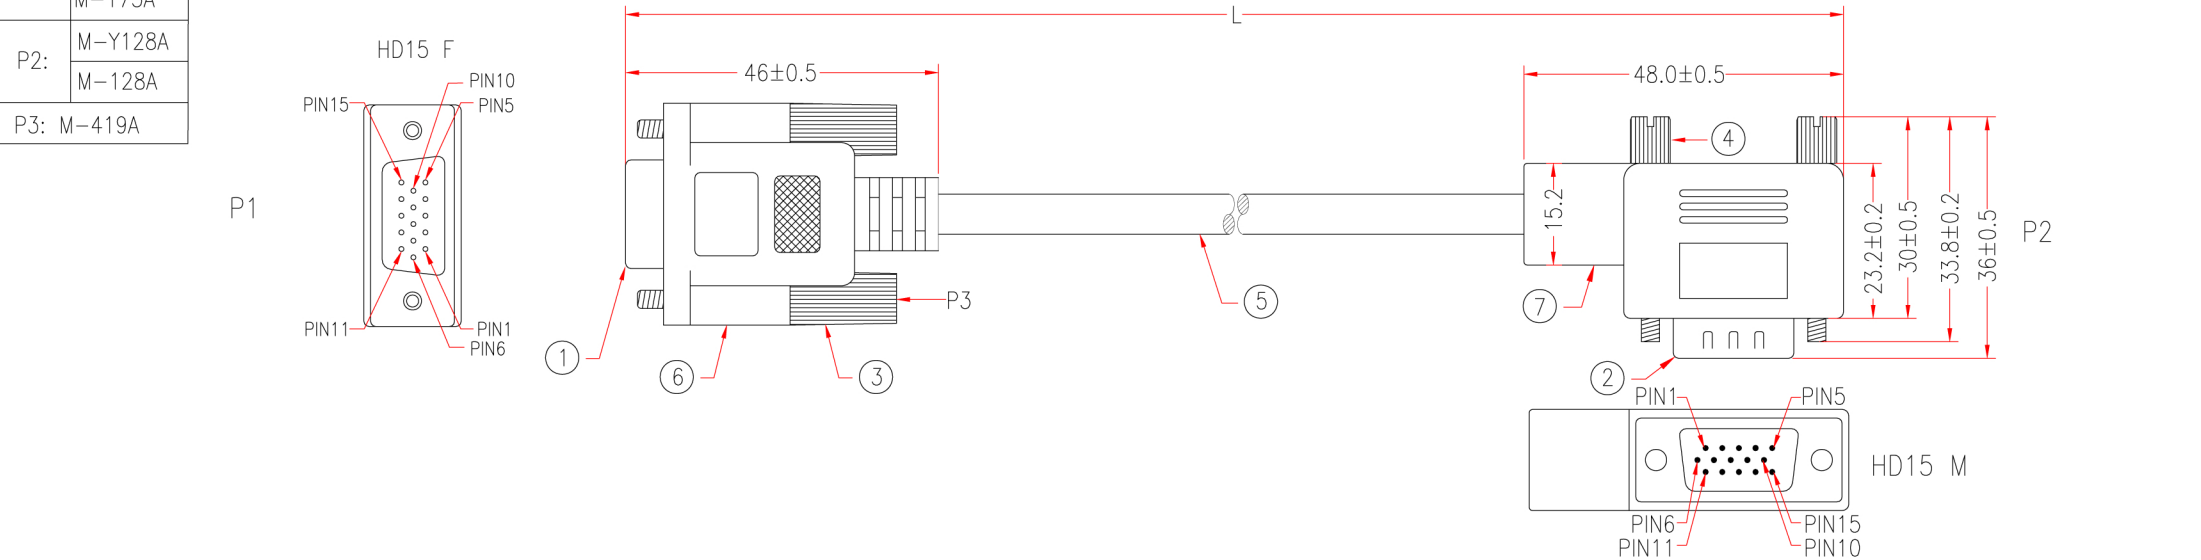

1015-10			
P1		P2	
1	_____	1	BROWN
2	_____	2	RED
3	_____	3	ORANGE
4	_____	4	PINK
5	_____	5	YELLOW
6	_____	6	GREEN
7	_____	7	LIGHT GREEN
8	_____	8	BLUE
9	_____	9	LIGHT BLUE
10	_____	10	PURPLE
11	_____	11	GREY
12	_____	12	WHITE
13	_____	13	BLACK
14	_____	14	BROWN/BLACK
15	_____	15	RED/BLACK
SHIELD	_____	SHIELD	

*NOTE: ALL relevant materials are complied with ROHS directive

7	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	ALUMINUM FOIL 30*65mm	A6MA04-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777	1	M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
6	PVC TUPE $\phi 3.0 \times 18\text{mm}$	H7A001-0304K09	1	M304
	ALUMINUM FOIL 25*60mm	A6MA03-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777	1	M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	NON-UL 15C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.0mm, JACKET BLACK, DRAWING No. EMAL2815C-078	H5BL34-0304K09	Lmm	M304
4	SCREW #4-40, LENGTH 6.0*33.8mm	A6AD02-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 36mm, BLACK	A6AA19-0095	2	M95
2	HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1CB01-0108	1	M108
1	HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1CA03-0108	1	M108

No.	DESCRIPTION		Q'TY	Supplier
APPROVED		BHD1515MAF-X	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DRAWING	XU			
DATE	11/SEP/17	ITEM NO.	1015-10	UNIT:mm