


P1,P2:	M-Y222E
	M-222E
P3:	M-426E

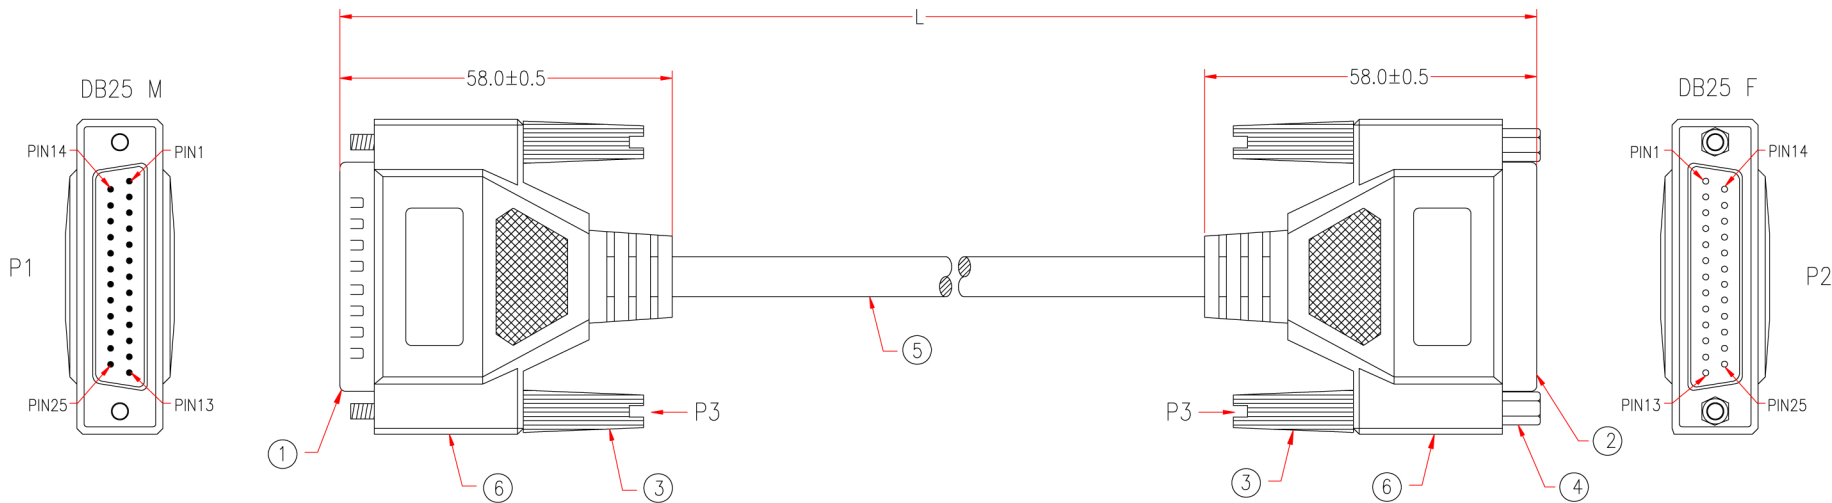

MARKING:

LSZH

2006-26

	P1		P2	P1		P2	
BROWN	1	————	1	14	————	14	BROWN/BLACK
RED	2	————	2	15	————	15	RED/BLACK
ORANGE	3	————	3	16	————	16	ORANGE/BLACK
PINK	4	————	4	17	————	17	PINK/BLACK
YELLOW	5	————	5	18	————	18	YELLOW/BLACK
GREEN	6	————	6	19	————	19	GREEN/BLACK
LIGHT GREEN	7	————	7	20	————	20	LIGHT GREEN/BLACK
BLUE	8	————	8	21	————	21	BLUE/BLACK
LIGHT BLUE	9	————	9	22	————	22	LIGHT BLUE/BLACK
PURPLE	10	————	10	23	————	23	PURPLE/BLACK
GREY	11	————	11	24	————	24	GREY/BLACK
WHITE	12	————	12	25	————	25	WHITE/BLACK
BLACK	13	————	13	SHIELD	————	SHIELD	

NOTE: All relevant materials are complied with RoHS directive .

6	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 30\text{mm}$	A4HA44-0743	2	M743
	COPPER FOIL 33*110mm	A6LA11-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK, LSZH			M304
5	NON-UL 25C 26AWG, ALUM-MYLAR FOIL AND COPPER BRAID SHIELDING WITH DRAIN WIRE, OD 8.0mm, LSZH, JACKET BLACK, DRAWING NO. EMAB2625C-1266		Lmm	M304
4	HEX-NUT #4-40, 5*6.6mm	A6BC02-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK, LSZH	A6AA30-0095	4	M95
2	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE03-0108	1	M108
1	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE14-0108	1	M108
No.	營業一部	DESCRIPTION	Q'TY	Supplier
APPROVED	2012.11.19			Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$
CHECKED	李淑萍			
DRAWING	PENG			
DATE	19/NOV/12	ITEM NO.	BLS25/25MF-X	
	CHECKED	UNIT:mm		