


| | |
|--------|---------|
| P1,P2: | M-Y222E |
| | M-222E |
| P3: | M-426E |

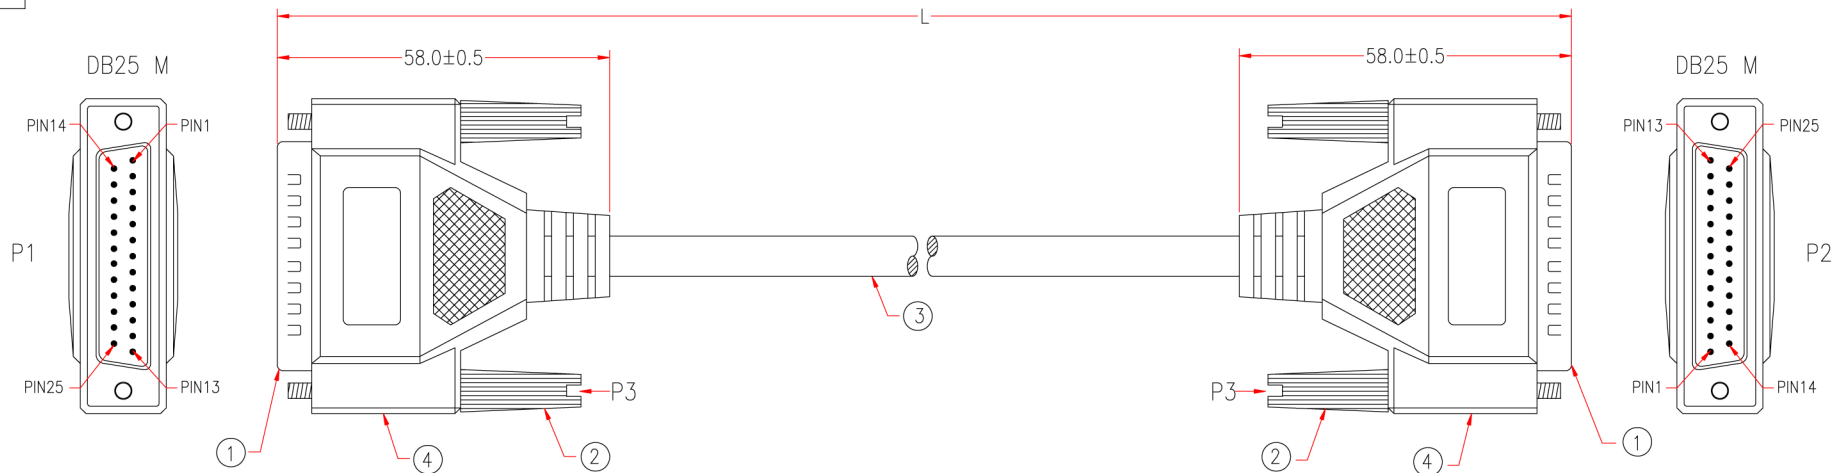

MARKING:

LSZH

2003-14

| P1 | P2 | P1 | P2 |
|----|---------------|--------|----------------------|
| 1 | 1 BROWN | 14 | 14 BROWN/BLACK |
| 2 | 2 RED | 15 | 15 RED/BLACK |
| 3 | 3 ORANGE | 16 | 16 ORANGE/BLACK |
| 4 | 4 PINK | 17 | 17 PINK/BLACK |
| 5 | 5 YELLOW | 18 | 18 YELLOW/BLACK |
| 6 | 6 GREEN | 19 | 19 GREEN/BLACK |
| 7 | 7 LIGHT GREEN | 20 | 20 BLUE/BLACK |
| 8 | 8 BLUE | 21 | 21 PURPLE/BLACK |
| 9 | 9 LIGHT BLUE | 22 | 22 GREY/BLACK |
| 10 | 10 PURPLE | 23 | 23 WHITE/BLACK |
| 11 | 11 GREY | 24 | 24 LIGHT GREEN/BLACK |
| 12 | 12 WHITE | 25 | 25 LIGHT BLUE/BLACK |
| 13 | 13 BLACK | SHIELD | SHIELD |

*NOTE: All relevant materials are complied with RoHS directive .

| No. | DESCRIPTION | Q'TY | Supplier |
|----------|--|----------|--------------|
| 4 | BLACK PVC TUBE ϕ 3.0*30mm | 2 | M304 |
| | COPPER FOIL 33*110mm | 2 | M309 |
| | MOLDED PE COLOR TRANSPARENT | | M280 |
| | MOLDED PVC BLACK, LSZH | | |
| 3 | NON-UL 25C 26AWG, ALUM-MYLAR FOIL AND COPPER BRAID SHIELDING WITH DRAIN WIRE, OD 8.0mm, LSZH, JACKET BLACK, DRAWING NO. EMAB2625C-1266 | Lmm | M304 |
| 2 | MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK, LSZH | 4 | M95 |
| 1 | DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR | 2 | M108 |
| APPROVED | 營業一部 2012.11.19 李淑萍 | | |
| CHECKED | HU | | |
| DRAWING | PENG | | |
| DATE | 19/NOV/12 | ITEM NO. | BLS25/25MM-X |
| CHECKED | | UNIT:mm | |

Cable Length Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm↑ ±40mm