


P1,P2:	M-Y139C
	M-139H
P3:	M-426E

Customer No: _____

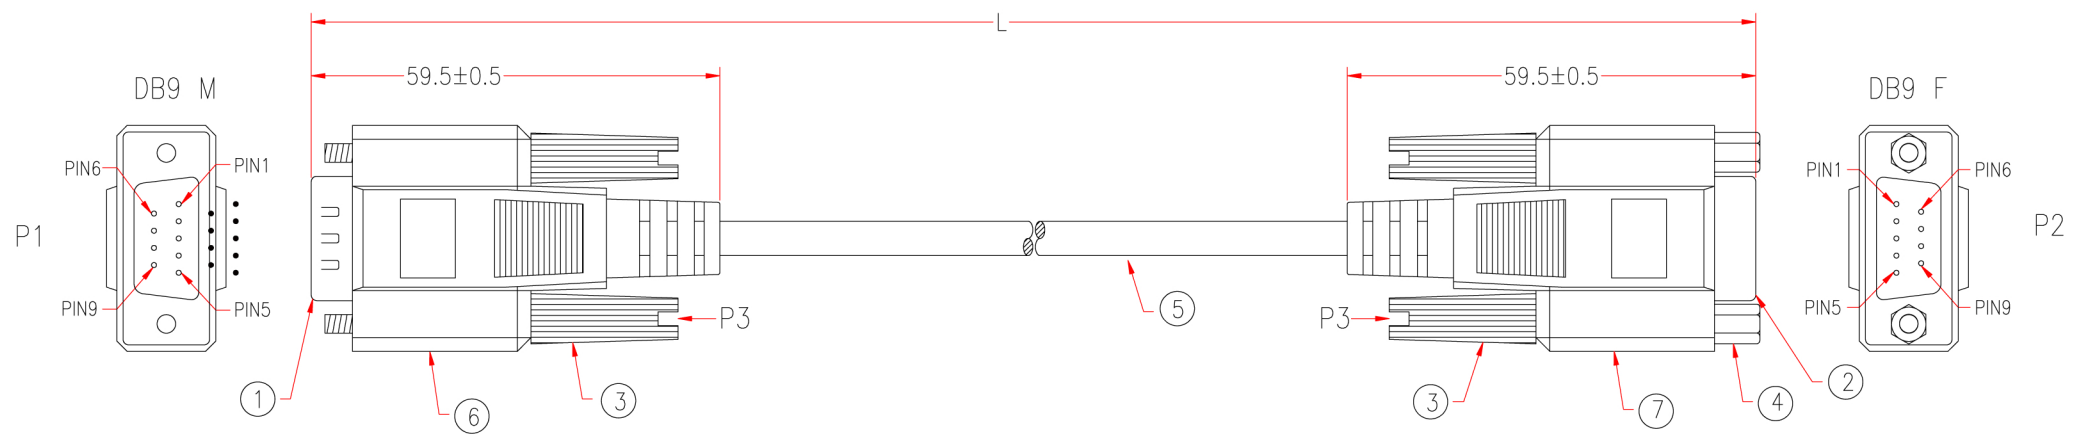

MARKING:

LSZH

1006-41			
P1	_____	P2	_____
1	_____	1	BROWN
2	_____	2	RED
3	_____	3	ORANGE
4	_____	4	YELLOW
5	_____	5	GREEN
6	_____	6	BLUE
7	_____	7	PURPLE
8	_____	8	GREY
9	_____	9	BLACK
SHIELD	_____	SHIELD	_____

*NOTE: All relevant materials are complied with RoHS directive .

6&7	BLACK PVC TUBE ϕ 3.0*22mm	H7A001-0304K09	2	M304
	COPPER FOIL 33*65mm	A6LA11-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK, LSZH			M304
5	NON-UL 9C 26AWG, ALUM-MYLAR FOIL AND COPPER BRAID SHIELDING WITH DRAIN WIRE, OD 6.0mm, LSZH, JACKET BLACK, DRAWING NO. EMAB2609C-1265		Lmm	M304
4	HEX-NUT #4-40, 5*6.6mm	A6BC02-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK, LSZH	A6AA30-0095	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA03-0108	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA17-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	PENG		
DATE	19/NOV/12	ITEM NO.	

BLS9/9MF-X

UNIT:mm

CHECKED