


REV.	DATE	FILE No.
1.0	2009-11-2	CC317-FM-1M

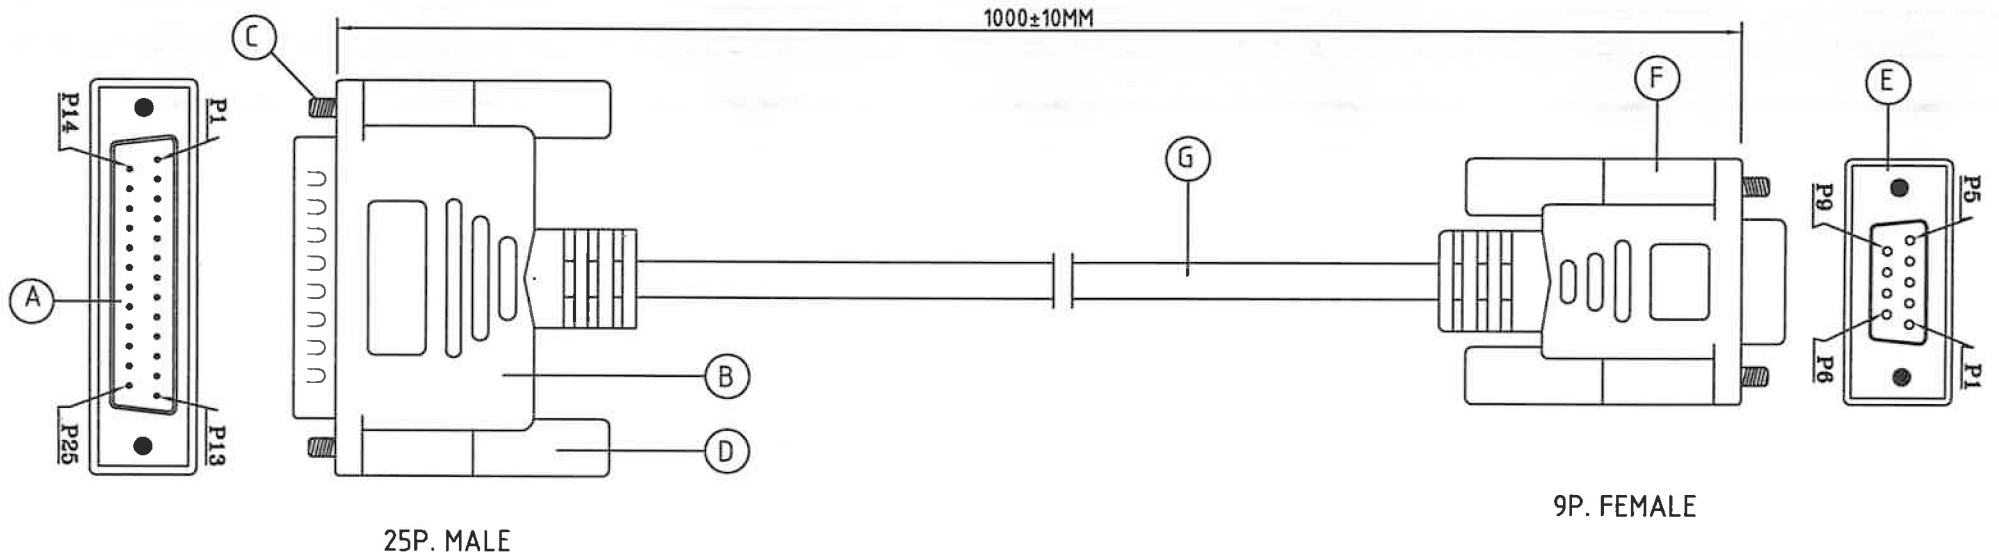

WIRING DIAGRAM

9 PIN FEMALE	25 PIN MALE
1-----	4
2-----	2
3-----	3
4-----	5+6
5-----	7
6+8-----	20
7-----	8
9-----	22
SHELL-----	SHELL

**SPECIFICATION:**

ITEM	PART NAME	MATERIAL	COLOR	QTY.
A	25P.D-SUB SOLDER TYPE "M" BLUE	P.B.	NICKEL	1SET.
B	MODEL TY-275 TYPE	P.V.C	BLACK	1
C	TS040X376TNOPO SCREW PLATED	MILD STEEL	NICKEL	4
D	MODEL TY-129 TYPE	P.V.C	BLACK	4
E	9P.D-SUB SOLDER TYPE "F" BLUE	P.B	NICKEL	1
F	MODEL TY-276 TYPE	P.V.C	BLACK	1
G	(0.12/7TX8C+0.16/7T+AL)X1C O.D.5MM	P.V.C	BLACK	1M

NOTE:ALL MATERIALS ARE COMPLIANCE TO "RoHS"

CUSTOMER: DIGGELMANN		<b>Tai Yip Electrical Co., Ltd.</b>
CUST P/N: BPR9/25FM-1		
S/O:	S/N:	PART No.: CC317-FM-1M/BK#R
DRAWING No.		PART NAME: RS 232(8C+1)DB9F-DB25M(MOULD)-RoHS
DRAWING BY	Guo.YanG	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCE:DECIMAL .X ±0.1 .XX ±0.05 ANGLE ±1/2°
CHECKED BY	LingQi.M	
APPROVER BY	Chen.Han	
		SHEET 1 OF 1 SCALE NO