


P1: M-004

P2: M-044


Customer No.: No.:1

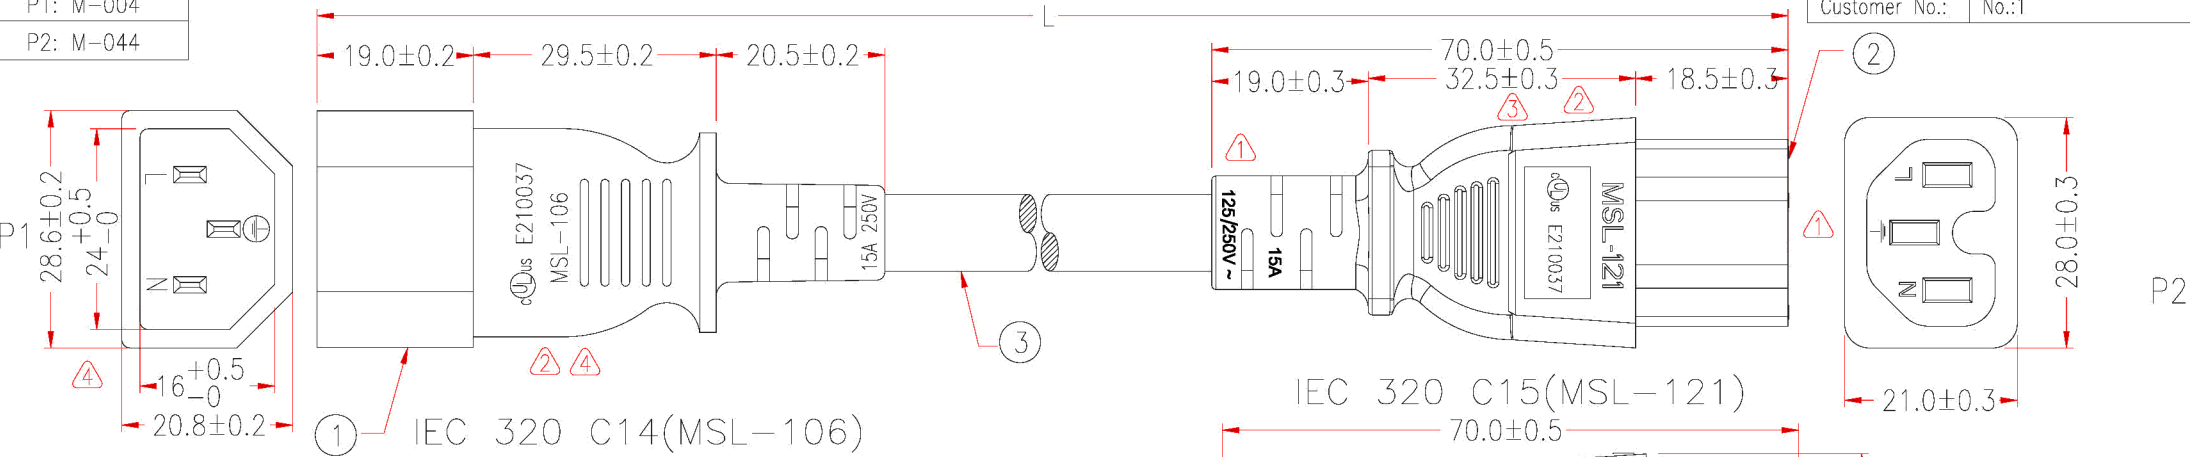

① IEC 320 C14(MSL-106)

IEC 320 C15(MSL-121)

PACKING:



JACKET & MOLDED & BRACKET COLOR
BLACK
RED
GREEN
BLUE


MARKING:

(UL) SJT 3/C 14AWG(2.08MM<sup>2</sup>) VW-1 105°C 300V E204978 CSA  
 SJT 3/C 2.08MM<sup>2</sup>(14AWG) FT2 105°C 300V 204790 MSL

P1: c<sub>us</sub> E210037 ④ P2: c<sub>us</sub> E210037 ③

\*NOTE: All relevant materials are complied with RoHS directive .  
 THE CABLE MARKING IS CONCAVE LETTERING MOULD

P1	P2
L _____	L BLACK
N _____	N WHITE
E _____	E GREEN

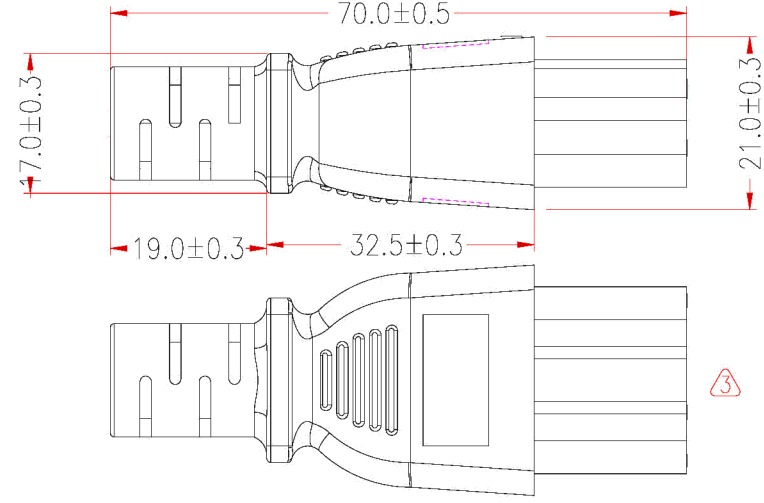

④	3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-147	H5TC21-0304K09	L-40mm	M304
④	2	MOLDED PVC 35P, JACKET BLACK	H1BC02-0304K09		M304
		BRACKET:9745C	A1QC42-0767	1	M767
④	1	TERMINAL:98745L	A1QB43-0257	3	M257
		MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
		BRACKET: YS-014	A1QC10-0767	1	M767
	No.	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3	M257
		DESCRIPTION		Q'TY	Supplier

APPROVED			C14C15			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	04/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS		
DRAWING	XIAO	04/SEP/17	PRODUCT NO.			UNIT: inches

③ REV.3 2015.11.03 MODIFY P2 MODEL LOGO ④ REV.4 2017.09.04 MODIFY MODEL LOGO & CABLE  
 ① REV.1 2013.06.17 MODIFY P2 MODEL LOGO ② REV.2 2015.02.04 MODIFY MODEL LOGO  
 NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm