



| | |
|-----|---------|
| P1: | M-Y536A |
| | M-536A |
| P2: | M-780A |

P1

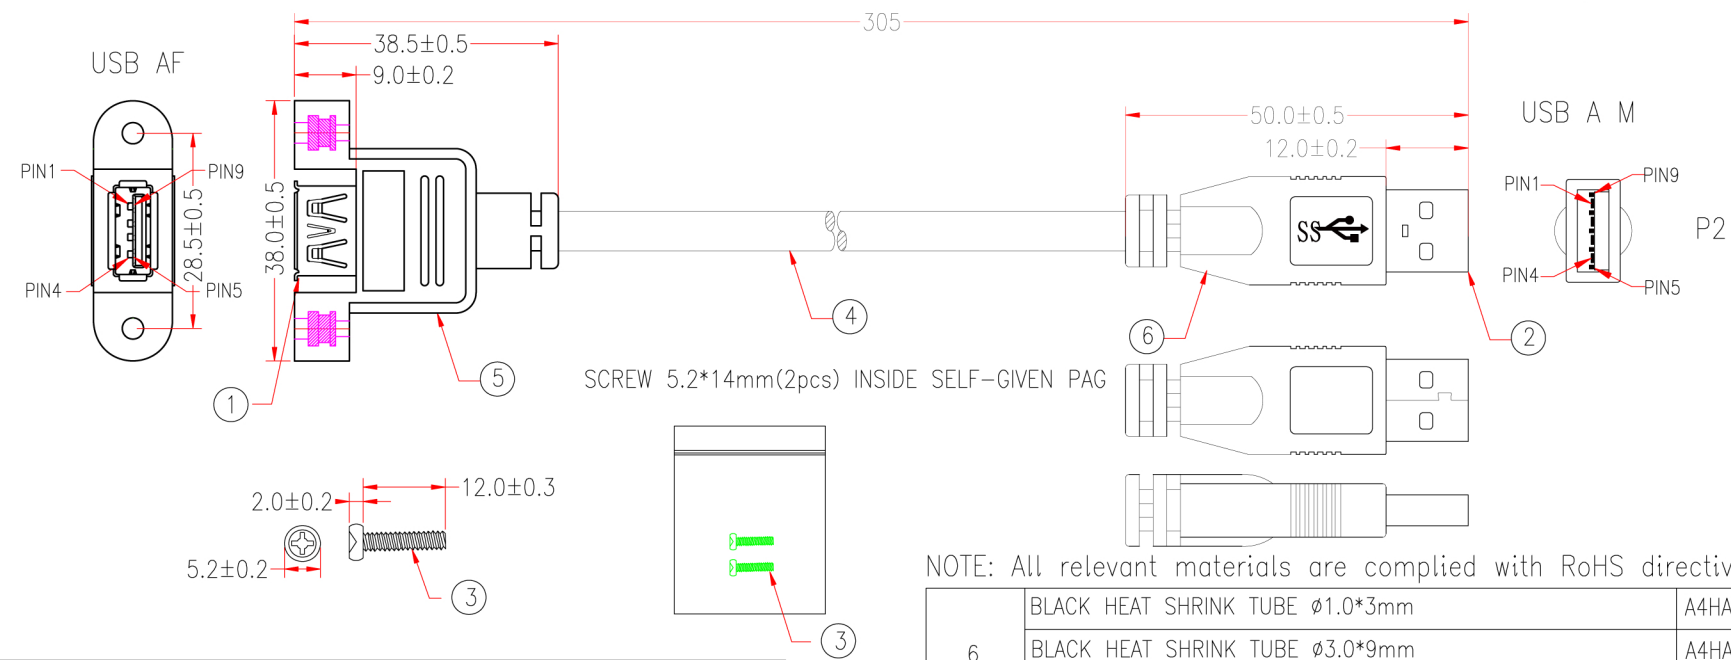

9J50-5

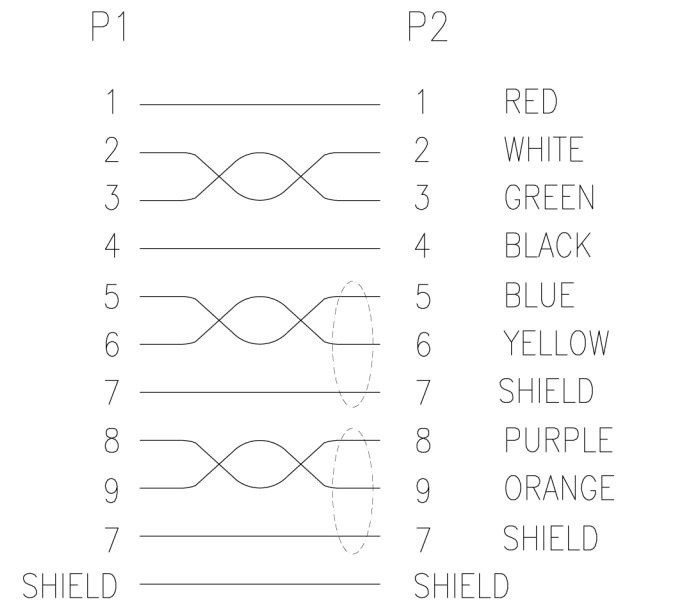

NOTE: All relevant materials are complied with RoHS directive .

| | | | | |
|-----|---|----------------|-------|----------|
| 6 | BLACK HEAT SHRINK TUBE ϕ 1.0*3mm | A4HA23-0959 | 1 | M959 |
| | BLACK HEAT SHRINK TUBE ϕ 3.0*9mm | A4HA10-0959 | 2 | M959 |
| | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 5 | NON-UL 24AWG INSULATOR WIRE, LENGTH 20mm, JACKET ORANGE, DRAWING No. EH002401C-028 | H5SG03-0304E01 | 1 | M304 |
| | BLACK HEAT SHRINK TUBE ϕ 1.0*10mm | A4HA23-0959 | 1 | M959 |
| | BLACK HEAT SHRINK TUBE ϕ 3.0*9mm | A4HA10-0959 | 2 | M959 |
| | HEX-NUT 5*4.0mm, #4-40 | A6BC01-0095 | 2 | M95 |
| | ALUMINUM FOIL 25*65mm | A6MA03-0579 | 1 | M579 |
| | MOLDED PE COLOR TRANSPARENT | A5BA02-0280 | | M280 |
| | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 4 | USB 3.0 CABLE,28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID,OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333 | H5KS02-0304K09 | 285mm | M304 |
| 3 | SCREW 5.2*14mm, 4-40# | A6AC12-0095 | 2 | M95 |
| 2 | USB A MALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATOR, SHORT TYPE | A1HA48-0656 | 1 | M656 |
| 1 | USB A FEMALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATION | A1HC19-0432 | 1 | M432 |
| No. | DESCRIPTION | | Q'TY | Supplier |

| | | | |
|----------|------------|----------|--|
| APPROVED | 2014.11.14 | CA341-03 | Cable Length Unless Other Spec. Tolerances: 0 ~200mm \pm 10mm 201~1000mm \pm 20mm 1001 ~1500mm \pm 25mm 1501~2100mm \pm 30mm 2100mm \uparrow \pm 40mm |
| CHECKED | 陳瑞雯 | | |
| DRAWING | ZHU | | |
| DATE | 23/OCT/14 | | |
| ITEM NO. | | UNIT:mm | |

CHECKED