


P1: M-942C

Customer No:

P2:

M-Y930A

M-930B

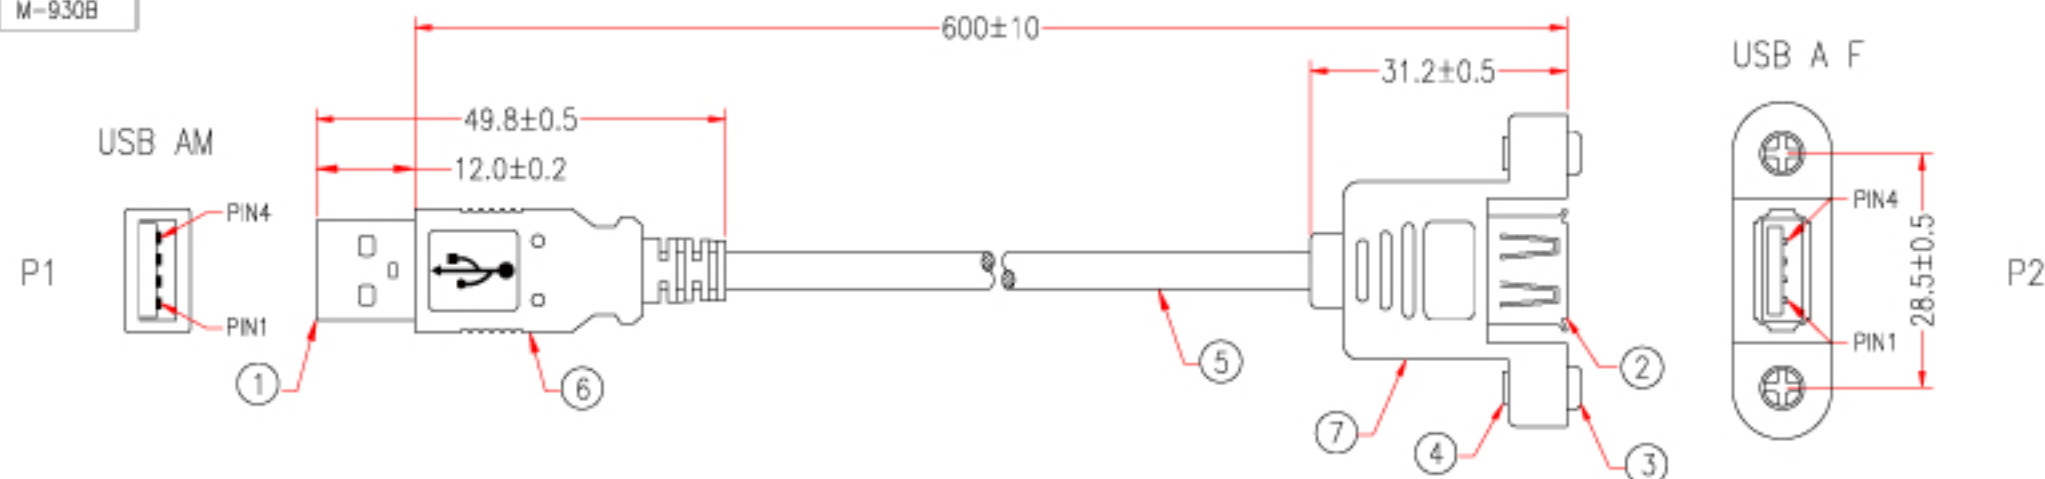

9706-7

P1	P2
1	1 RED 24#
2	2 WHITE
3	3 GREEN
4	4 BLACK 24#
SHIELD	SHIELD

NOTE: ALL relevant materials are complied with RoHS directive

7	BLACK HEAT SHIRK TUBE $\phi 1.0 \times 8\text{mm}$	A4HA64-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
6	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, AMA BRAID, JACKET BLACK, DRAWING No. EJAB2801P2402C-138	H5KQ29-0304K09	590mm	M304
4	HEX-NUT 5*7.7mm	A6BC03-0095	2	M95
3	SCREW 5.5*8mm	A6AC01-0095	2	M95
2	USB A FEMALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR	A1HC07-0108	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA23-0454	1SET	M454
No.	DESCRIPTION	Q'TY		Supplier

APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm $\pm 40\text{mm}$	
CHECKED	HU		
DRAWING	JIANG		
DATE	09/MAY/14		
ITEM NO.		CA941-06UL	
UNIT:mm			

CHECKED