


P1: M-942C

Customer No:

P2:

M-Y930A

M-930B

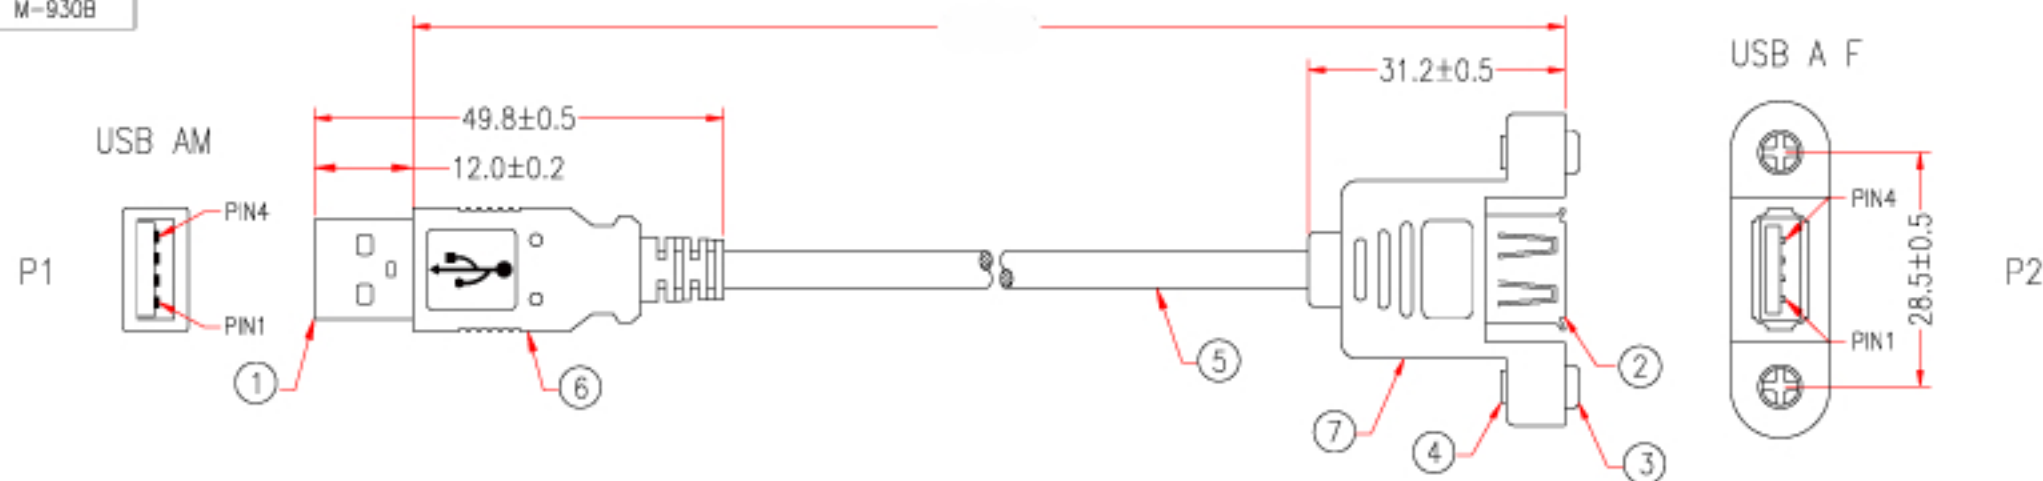

9706-7

P1	P2
1	1 RED 24#
2	2 WHITE
3	3 GREEN
4	4 BLACK 24#
SHIELD	SHIELD

NOTE: ALL relevant materials are complied with RoHS directive

No.	DESCRIPTION	Q'TY	Supplier
7	BLACK HEAT SHIRK TUBE $\phi$ 1.0*8mm	A4HA64-0959	1 M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280	M280
	MOLDED PVC BLACK	H1BF01-0304K09	M304
6	MOLDED PVC BLACK	H1BF01-0304K09	M304
5	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, AMA BRAND, JACKET BLACK, DRAWING No. EUAB2801P2402C-138	H5K029-0304K09	590mm M304
4	HEX-NUT 5*7.7mm	A6BC03-0095	2 M95
3	SCREW 5.5*8mm	A6AC01-0095	2 M95
2	USB A FEMALE 2.0, GOLD PLATING 30 $\mu$ ON CONTACTS, WHITE INSULATOR	A1HC07-0108	1 M108
1	USB A MALE 2.0, GOLD PLATING 30 $\mu$ ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA23-0454	1SET M454

APPROVED				Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm$ 10mm 201~1000mm $\pm$ 20mm 1001 ~1500mm $\pm$ 25mm 1501~2100mm $\pm$ 30mm 2100mm $\uparrow$ $\pm$ 40mm
CHECKED	HU			
DRAWING	JIANG			
DATE	09/MAY/14	ITEM NO.	CA941-XX	
				UNIT:mm

CHECKED