



| | | |
|------|-----------|------------------|
| REV. | DATE | FILE No. |
| 1.0 | 2008-6-30 | CC310UL-FF-2M GY |

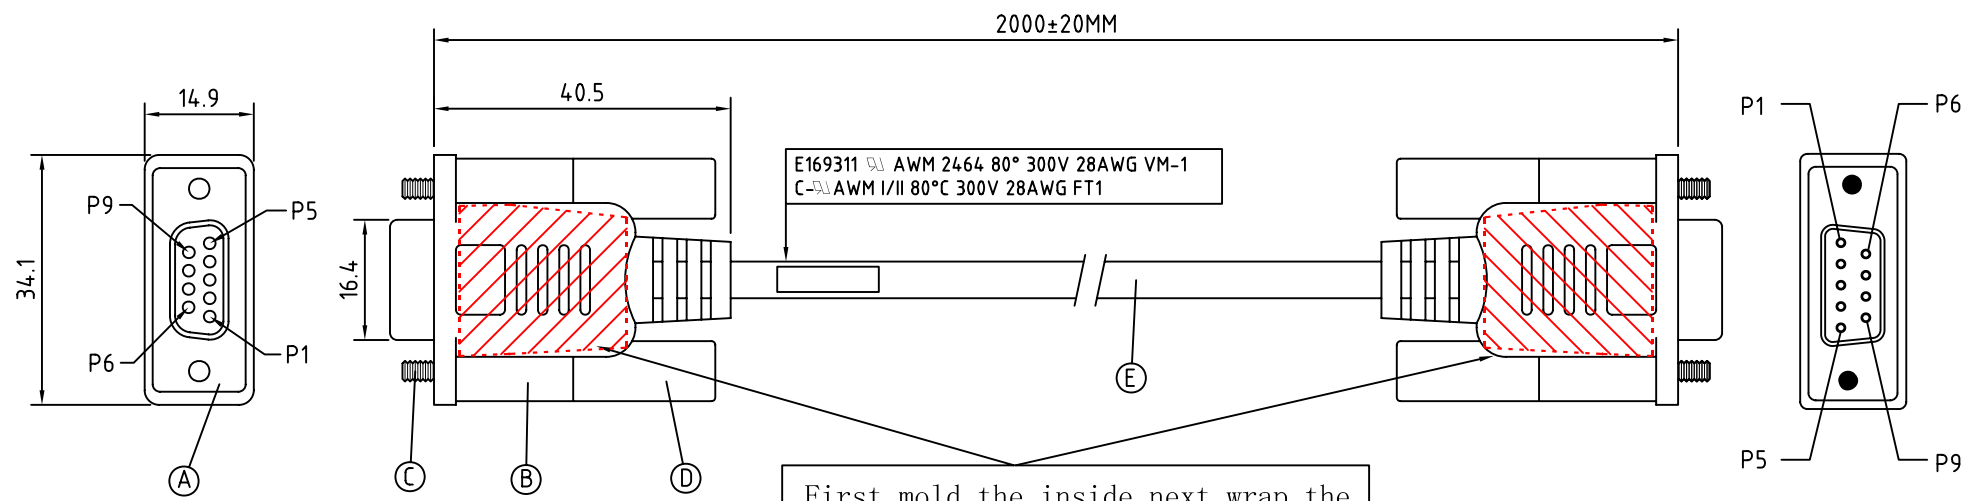

First mold the inside, next wrap the aluminium foil, later mold the outside.
先啤内模, 再包铝箔纸, 最后成型外模.

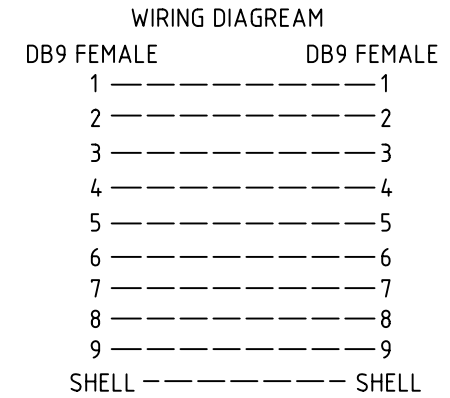

SPECIFICATION:

| ITEM | PART NAME | MATEIAL | COLOR | QTY |
|------|----------------------------------------------------|------------|--------|-----|
| A | DB9-MSN1010LR 9P.D-SUB SOLDER"F"BU | P.B | NICKEL | 2 |
| B | MODEL TY-129 TYPE | P.V.C | GREY | 2 |
| C | TS040X360TNOPO 40X376 SCREW | MILD STEEL | NICKEL | 4 |
| D | MODEL TY-276 TYPE | P.V.C | GREY | 4 |
| E | UL2464#28X9+1GY (0.12/7TX9C+0.16/7T+AL)X1C #5MM | P.V.C | GREY | 2M |

NOTE:ALL MATERIALS ARE COMPLIANCE TO "RoHS".

| | | |
|-----------------------|-----------|-----------------------------------------------------------------------------------------------------------------|
| CUSTOMER: DIGGELMANN | | |
| CUST P/N: 9/9FF-2/53E | | |
| S/O:5201/08 | S/N: | PART No.: CC310UL-FF-2M/GY-R |
| DRAWING No. | CC-310-38 | PART NAME: DB9F-DB9F(9C+1)28AWG(MOLDED) |
| DRAWING BY | Guo.Yang | UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCE:DECIMAL .X ±0.1 .XX ±0.05 ANGLE ±1/2° |
| CHECKED BY | LingQi.M | |
| APPROVER BY | Chen.Han | |
| | | |
| | | SHEET 1 OF 1 |
| | | SCALE NO |