



REV.	DATE	FILE No.
10	2007-12-29	CC310UL-MF-10M BK

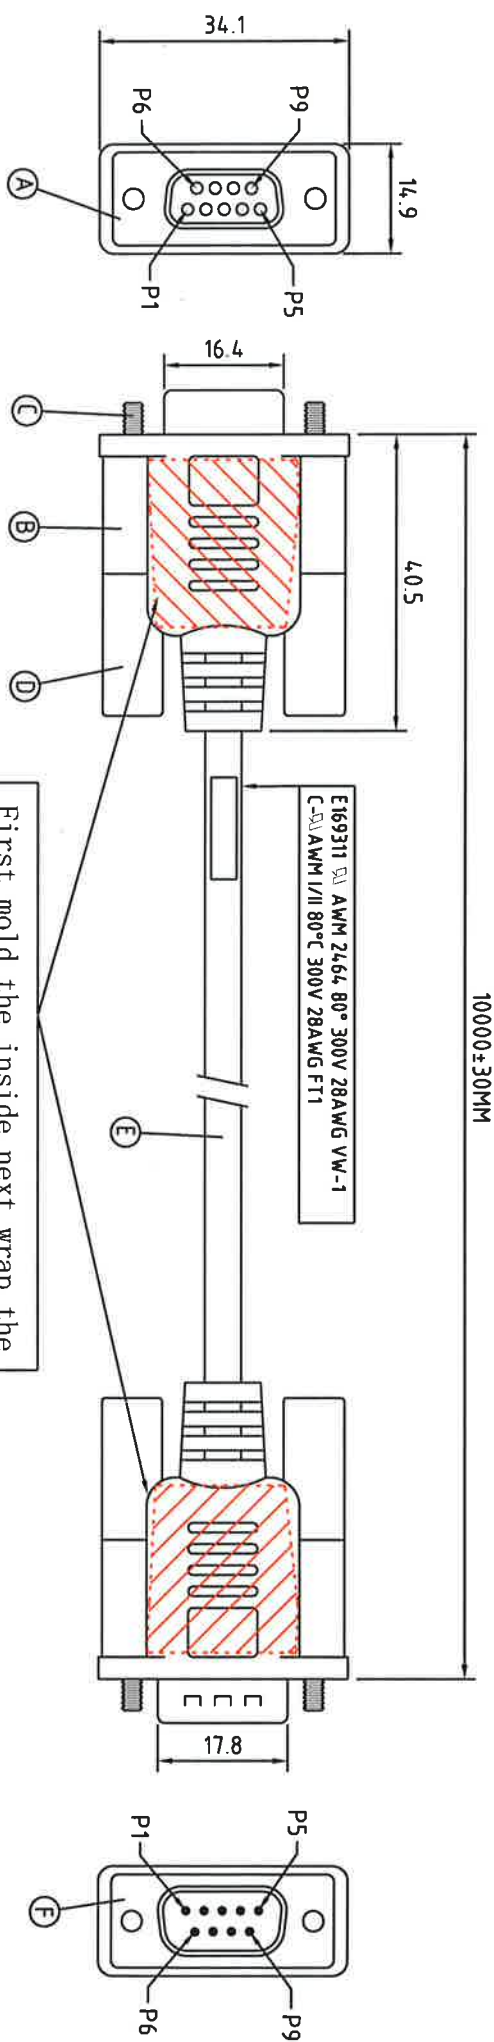

First mold the inside, next wrap the aluminium foil, later mold the outside.
先啤内模, 再包铝箔纸, 最后成型外模.

WIRING DIAGRAM

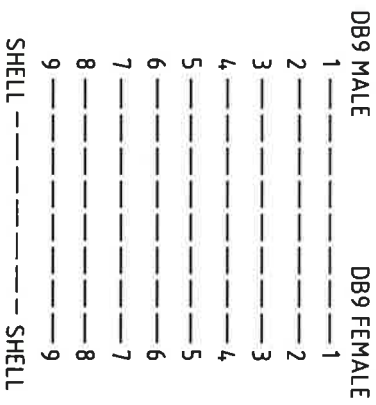

SPECIFICATION:

ITEM	PART NAME	MATERIAL	COLOR	QTY
A	DB9-MSN1010LR 9P.D-SUB SOLDER" M"BU	P.B	NICKEL	1
B	MODEL TY-129 TYPE	P.V.C	BLACK	2
C	TS040X360INOPD 40X376 SCREW	MILD STEEL	NICKEL	4
D	MODEL TY-276 TYPE	P.V.C	BLACK	4
E	UL 24,64,#28X9+1BKB (0.12/7TX9C+0.16/7T+AL)X1C #5MM	P.V.C	BLACK	10M
F	DB9-MSN101NLR 9P.D-SUB SOLDER" F"BU	P.B	NICKEL	1

NOTE: ALL MATERIALS ARE COMPLIANCE TO "ROHS".

CUSTOMER: DIGGELMANN		<p>Tai Yip Electrical Co., Ltd.</p>
CUST P/N: B9/9MF-10	S/N:	
S/O: 12370/07	CC-310-46	PART No.: CC310UL-MF-10M/BK-R
DRAWING No.	LingQi.M	PART NAME: DB9M-DB9F(9C+1)28AWG(MOLDED)
CHECKED BY	Gendong.C	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCE: DECIMAL X ±0.1
APPROVER BY	WenZhan.Z	ANGLE ±1/2°
		SHEET 1 OF 1
		SCALE
		NO