


REV.	DATE	FILE No.
10	2007-12-29	CC310UL-MF-5M BK

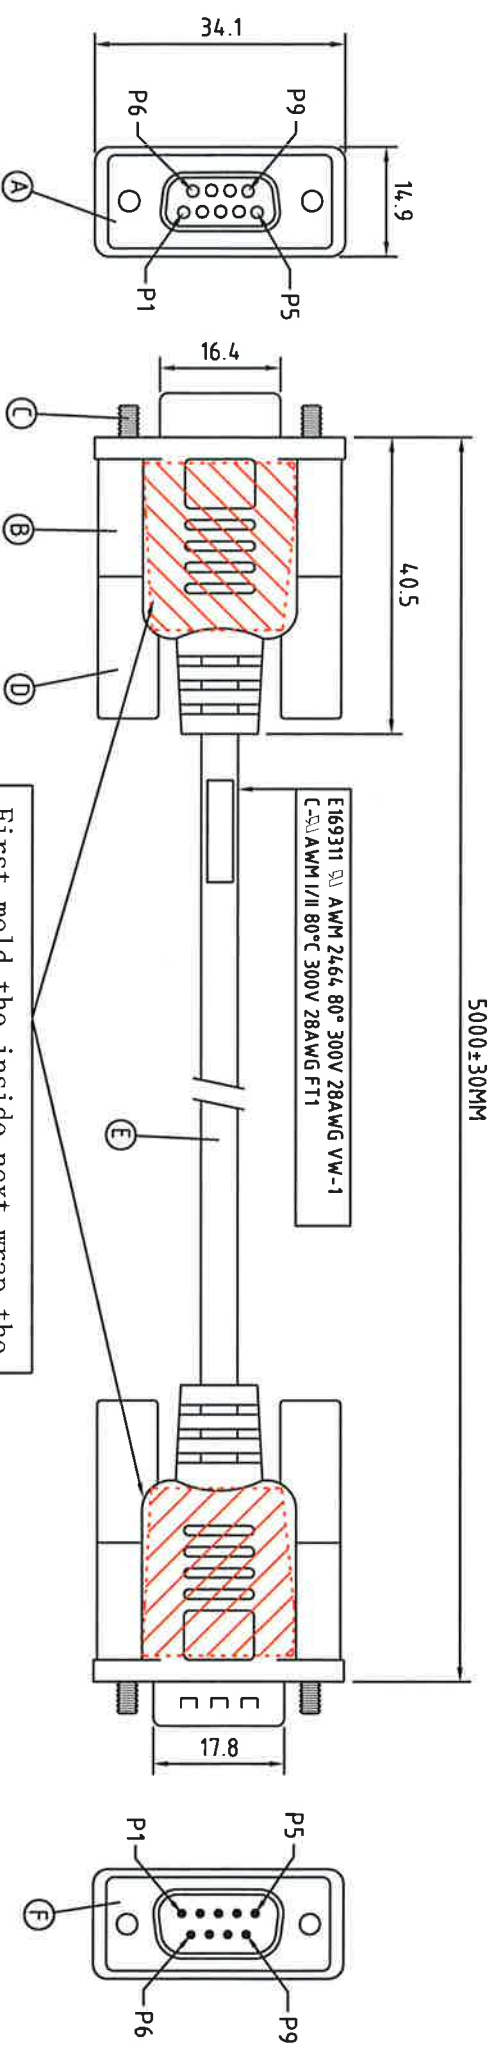

First mold the inside, next wrap the aluminium foil, later mold the outside.  
先啤内模, 再包铝箔纸, 最后成型外模.

WIRING DIAGRAM  
DB9 MALE DB9 FEMALE

- 1 ----- 1
- 2 ----- 2
- 3 ----- 3
- 4 ----- 4
- 5 ----- 5
- 6 ----- 6
- 7 ----- 7
- 8 ----- 8
- 9 ----- 9
- SHELL ----- SHELL

SPECIFICATION:

ITEM	PART NAME	MATERIAL	COLOR	QTY
A	DB9-MSN1010LR 9P.D-SUB SOLDER"W"BU	P.B	NICKEL	1
B	MODEL TY-129 TYPE	P.V.C	BLACK	2
C	TS040X360TNOPO 40X376 SCREW	MILD STEEL	NICKEL	4
D	MODEL TY-276 TYPE	P.V.C	BLACK	4
E	UL 2464 #28X9+1BK8 (0.12/7TX9C+0.16/7T+AL)X1C #5MM	P.V.C	BLACK	5M
F	DB9-MSN1010LR 9P.D-SUB SOLDER"F"BU	P.B	NICKEL	1

NOTE: ALL MATERIALS ARE COMPLIANCE TO "ROHS".

CUSTOMER: DIGGELMANN		PART No.: CC310UL-MF-5M/BK-R	
CUST P/N: B9/9MF-5/55C		PART NAME: DB9M-DB9F(9C+(1)28AWG(MOLDED))	
S/O: 12373/07	S/N:		
DRAWING No.	CC-310-45		
DRAWING BY	LingQi.M	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCE: DECIMAL X ±0.1	
CHECKED BY	GengDong.C	ANGLE ±1/2°	
APPROVER BY	WenZhan.Z	SHEET 1 OF 1 SCALE NO	

**Tai Yip Electrical Co., Ltd.**