



CUSTOMER NO:	REMARK

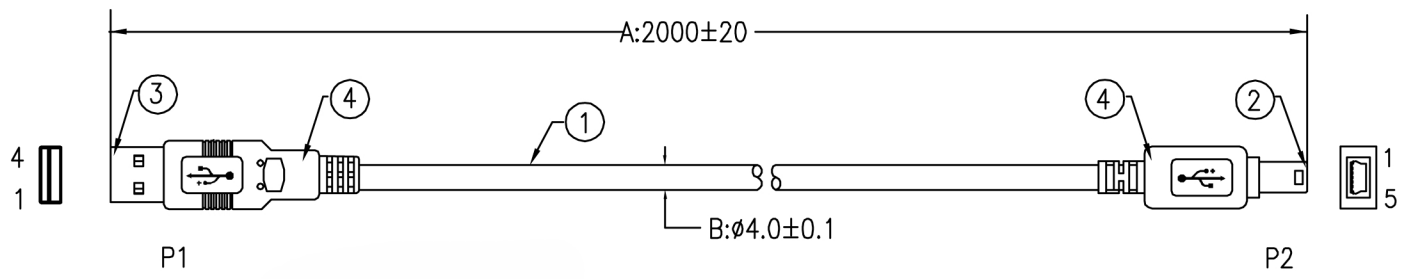

PINOUT:

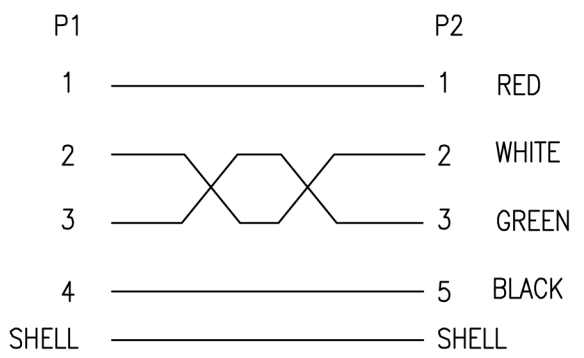

NOTE:

- 1) P1 DIE NO: OU04004
P2 DIE NO: OU05001
- 2) PRIMARY DIM:A,C

4	OUTER JACKET PVC 60Pa CLEAR(2101) (RoHS)
3	USB2.0 A/M WHITE SOLDER TYPE (RoHS)
2	MINI USB2.0 5PIN BLACK SOLDER TYPE (RoHS)
1	USB 2.0 28#1P+26#2C+A+B(64TA) OD:4.0MM CLEAR(2101) 2000MM (RoHS)

A	FIRST EDITION	LJM	24/03/09										
REV.	ECR	DESCRIPTION	C.N. DATE										
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>		<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>											
<table border="1"> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01mm ↑</td> <td>±0.20mm</td> </tr> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01mm ↑	±0.20mm	TITLE MINI USB2.0 CABLE	
DIMENSIONS	TOLERANCE												
0.00 TO 30.00mm	±0.10mm												
30.01 TO 80.00mm	±0.13mm												
80.01 TO 150.00mm	±0.15mm												
150.01mm ↑	±0.20mm												
MATERIAL		CHKD.	CONF.										
FINISH		DR. LJM	APPD.										
		PART NO. CC353-2											
SCALE	SHEET 1/1	UNIT MM	SIZE A4										
		REV. A											