
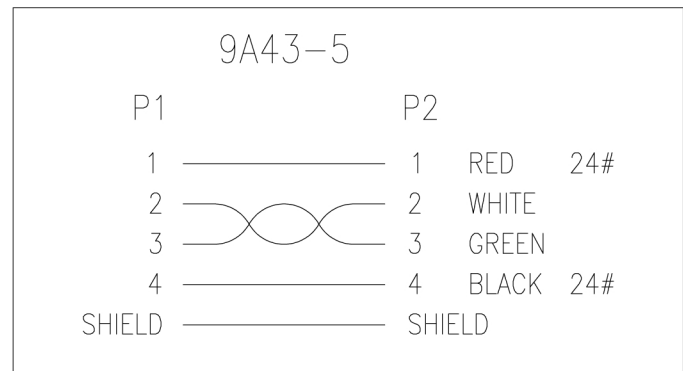


P1: M-Y932A
 M-932A
 P2: M-945A

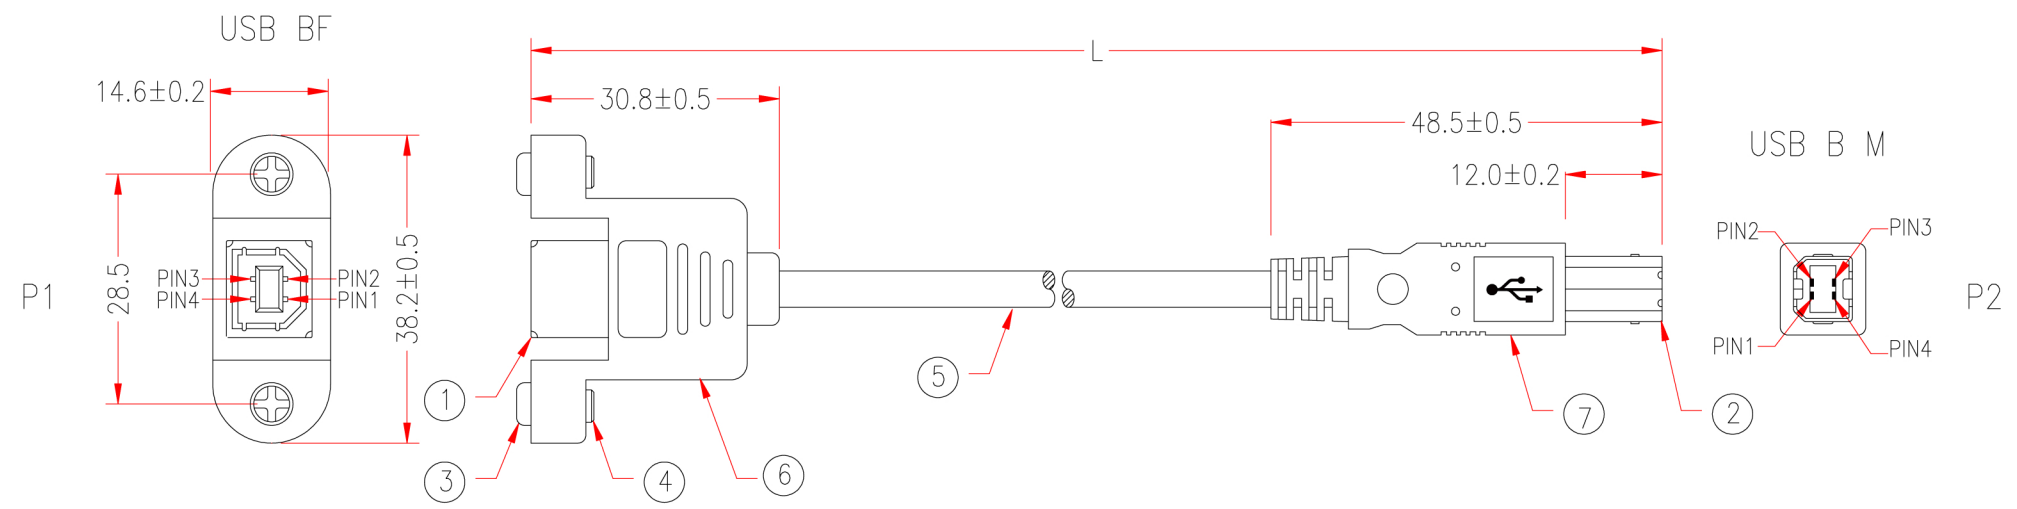

NOTE: All relevant materials are complied with RoHS directive.

No.	DESCRIPTION	Q'TY	Supplier
7	MOLDED PVC BEIGE		M304
6	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BEIGE		M304
5	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, AMA BRAID, JACKET BEIGE, DRAWING No.EUAB2801P2402C-139	L-10mm	M304
4	HEX-NUT 5*7.7mm	2	M95
3	SCREW 5.5*8mm	2	M95
2	USB B MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT TYPE	1	M108
1	USB B FEMALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR	1	M108

APPROVED					Cable Length Unless Other Spec. Tolerances:
CHECKED	TIAN				0 ~200mm ±10mm
DRAWING	LIANG				201~1000mm ±20mm
					1001 ~1500mm ±25mm
					1501~2100mm ±30mm
					2100mm↑ ±40mm
DATE	13/NOV/07	ITEM NO.	9A43-5		UNIT:mm

CHECKED

