



REV.	DATE	FILE No.
1.0	2011-7-27	CC454-MF-0.3M

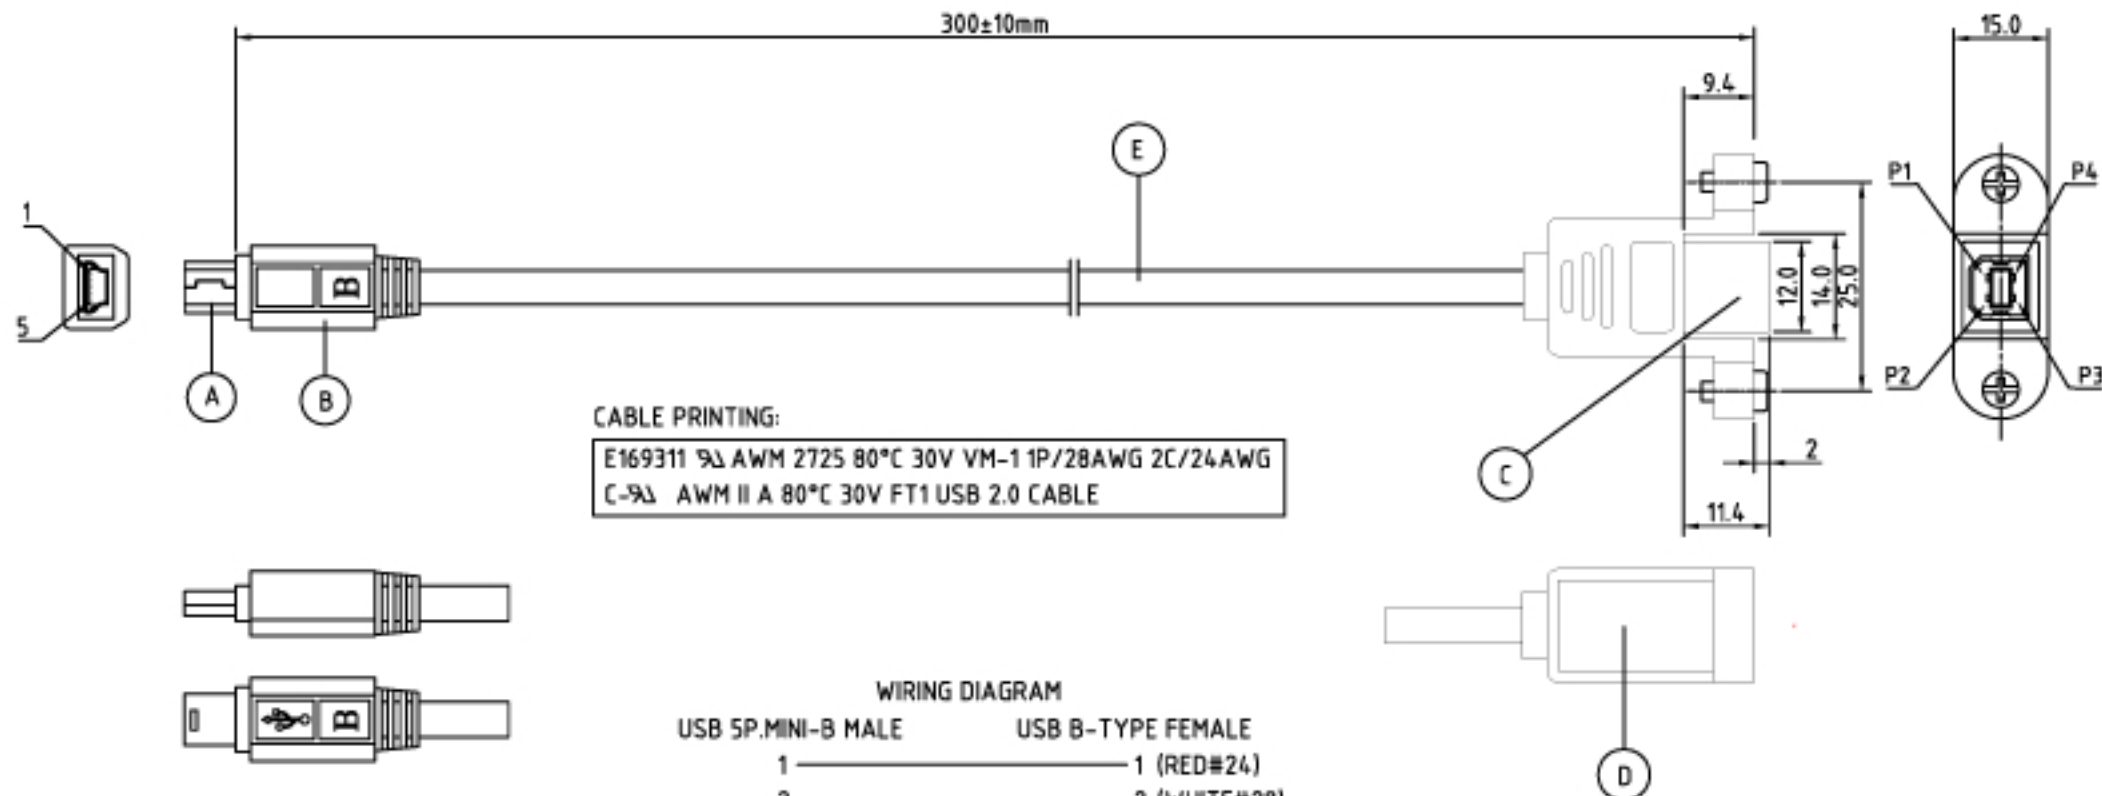

CABLE PRINTING:

E169311 9\ AWM 2725 80°C 30V VM-1 1P/28AWG 2C/24AWG  
C-9\ AWM II A 80°C 30V FT1 USB 2.0 CABLE





WIRING DIAGRAM

USB 5P.MINI-B MALE	USB B-TYPE FEMALE
1	1 (RED#24)
2	2 (WHITE#28)
3	3 (GREEN#28)
5	4 (BLACK#24)
SHELL	SHELL

SPECIFICATION:

ITEM	PART NAME	MATERIAL	COLOR	QTY.
A	USB 5P.MINI-B MALE CONNECTOR	P.B.	NICKEL	1
B	MODEL TY-397 TYPE	PVC	BLACK	1
C	USB FEMALE B-TYPE CONNECTOR	P.B.	NICKEL	1
D	MODEL TY-570 TYPE	PVC	BLACK	1
E	UL2725(2.0V) BK 1P×28#+2C×24# +1-B(65%) O.D.4.7MM	PVC	BLACK	0.3M

NOTE:ALL MATERIALS ARE COMPLIANT TO "RoHS".

CUSTOMER: DIGGELMANN		<b>CC460BMB-0.3R</b>
CUST. P/N:		
S/O:	S/N:	PART No.:
DRAWING No.	CC-454-01	PART NAME:USB 5P.MINI-B MALE TO USB 2.0(B) FEMALE
DRAWN BY	Lingqi Meng	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MM. TOLERANCE:DECIMAL .X ±0.1 .XX ±0.05 ANGLE ±1/2°
CHECKED BY	Zhongjiao/Baifa	
APPROVED BY	Chenhan	
		 
		SHEET 1 OF 1
		SCALE NO