


CABLE MARKING:

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/2C+24AWG/2C
 (UL) E305668 TYPE CM 75°C CSA 204790 TYPE CM 75°C MSL

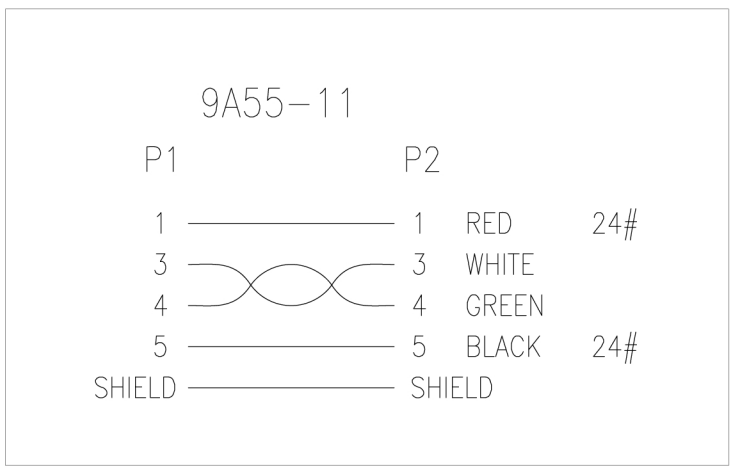

*NOTE: All relevant materials are complied with RoHS directive.

3	BLACK HEAT SHRINK TUBE ϕ 1.0*5mm	A4HA02-0959	8	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
2	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-139	H5KH29-0304K09	1980mm	M304
1	MINI USB 5P MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1HE09-0108	2set	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	XIAO		
DATE	28/DEC/16	ITEM NO.	

CCB391-2CT

UNIT:mm

CHECKED