



LTR	REV.	DESCRIPTION
	B	ECN # 050126-3 CHANGE CONNECTOR
*4	C	ECN # 050526-5 CHANGE TOOLING & PVC

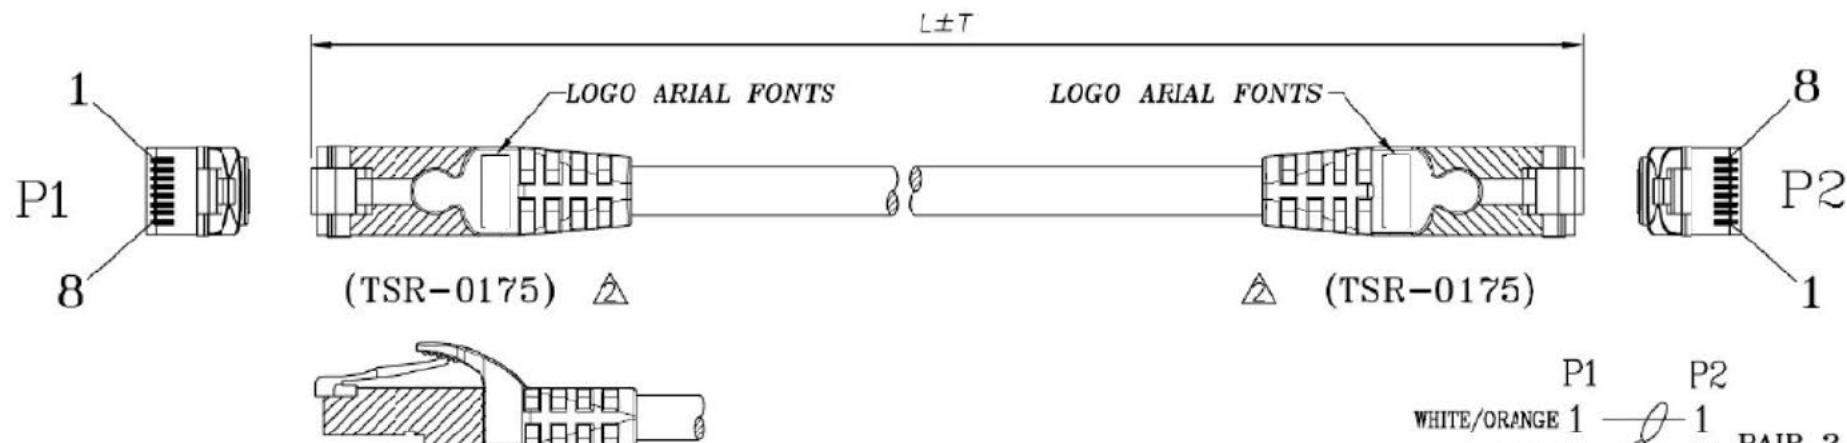

MINI TIE COLOR: "C"



	P1		P2	
WHITE/ORANGE	1		1	PAIR 2
ORANGE	2		2	
WHITE/GREEN	3		3	PAIR 3
GREEN	6		6	
ELUE	4		4	PAIR 1
WHITE/BLUE	5		5	
WHITE/BROWN	7		7	PAIR 4
BROWN	8		8	
	BRAID			
	SHELL (T568B)			SHELL

NOTE:

1. CABLE: 350MHZ ENHANCED CAT.5E SFTP[26AWG(7/0.163)B.C*4PR +AL-FOIL/MYLAR+DRAIN WIRE+BRAID(65%)] INS:HD-PE
PVC JACKET OD:6.0±0.15mm COLOR: "C"
2. CONNECTORS:
P1 & P2: RJ45 8P8C PLUG MALE 30u" PIN GOLD PLATED
+ METAL SHELL.
3. HOOD: MOLDED TYPE, PVC 6CP, COLOR: "C"

4. TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3Ω MAX.
- <3>.INSULATION RESISTANCE 20MΩ MIN.

5. PACKING: EACH PC / POLYBAG + BAR CODE LABEL

≤ 3M CABLE , POLYBAG TITLE: a. PATCH CABLE
(PLEASE SEE P-0092 PACKING DRAWING)

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

CMSSTP5EULGR-003M

Title

CAT.5E SFTP PATCH CABLE (POLYBAG)

Customer P/N

Check

App'd

Customer

T-JPC(SW)

Engr

Scale

NCNE

Units

m/m

Third Angle Projection

Dwg No. 210-0756

REV: C

Sheet 1/6