


MARKING: E300060 ⚡ AWM 2725 80°C 30V VW-1 CSA  
 204790 AWM I/II A/B 80°C 30V FT1 MSL USB3.0

\* NOTE: All relevant materials are complied with RoHS directive .

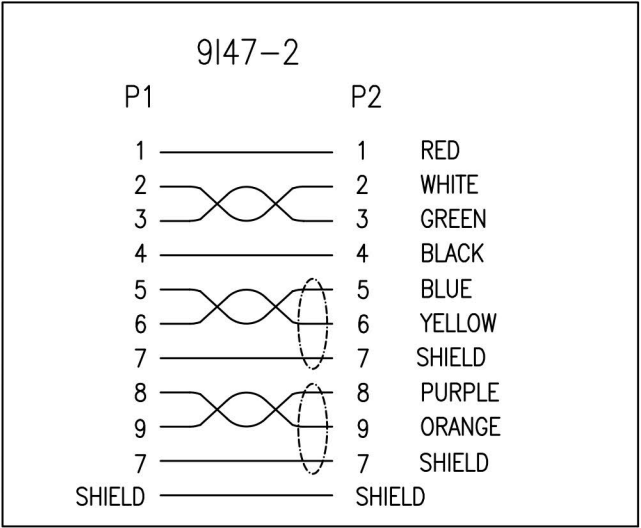

5	BLACK HEAT SHRINK TUBE $\phi$ 3.0*5mm	A4HA26-0959	2	M959
	MOLDED PVC BLUE(U28)	H1BF01-0304U28		M304
4	BLACK HEAT SHRINK TUBE $\phi$ 3.0*5mm	A4HA26-0959	2	M959
	MOLDED PVC BLUE(U28)	H1BF01-0304U28		M304
3	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS +24AWG*2C+AMA BRAID(85%), OD 5.8mm JACKET BLUE(U28), DRAWING NO. EUAB2801P2802P2402C-333	H5KS02-0304U28	1980mm	M304
2	USB B MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SHORT TYPE	A1HB52-0454	1set	M454
1	USB A MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SHORT TYPE	A1HA48-0454	1set	M454

No.	DESCRIPTION			Q'TY	Supplier
APPROVED			CU300BL-2		
CHECKED	HU	18/JUN/20	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	ZHU	18/JUN/20	PRODUCT NO.	CU300BL-2	

Cable Length Unless Other Spec.  
 Tolerances:  
 0 ~200mm ±10mm  
 201~1000mm ±20mm  
 1001 ~1500mm ±25mm  
 1501~2100mm ±30mm  
 2100mm± ±40mm

CHECKED

UNIT: mm