



P1: M-942H

Customer No: NO.1

P2: M-Y976A  
M-976A

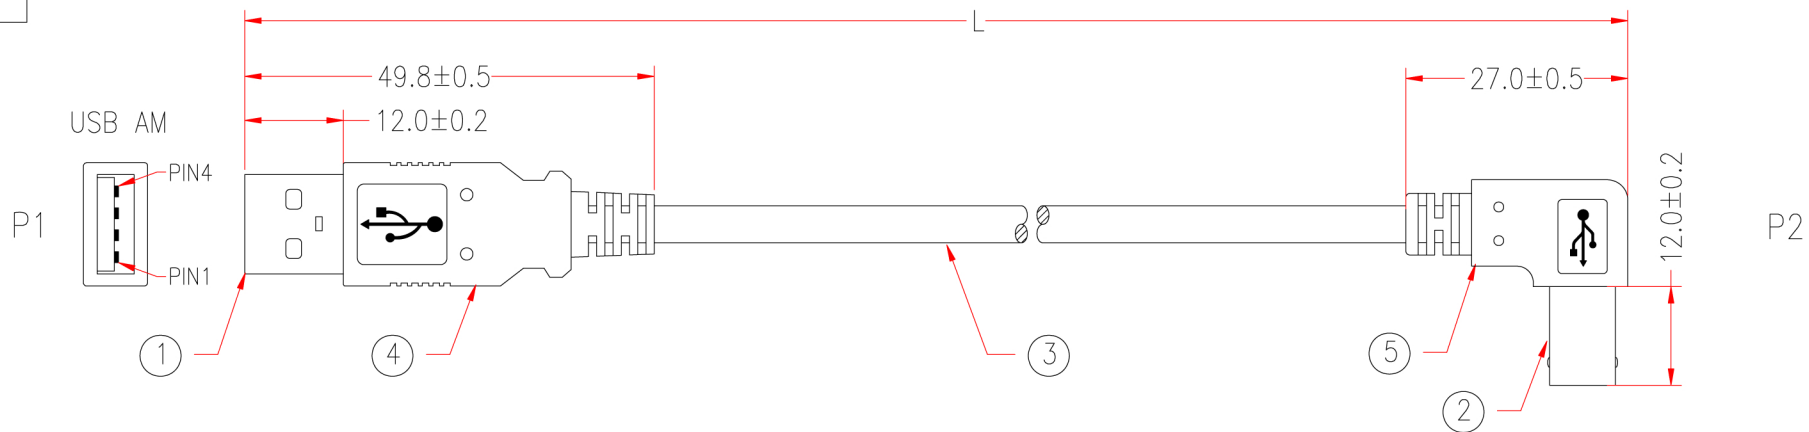


ITEM NO.	Length "L"	Length "X"
CU500BAR-005	500mm	490mm
CU500BAR-01	1000mm	990mm
CU500BAR-02	2000mm	1990mm



MARKING: HI-SPEED USB Revision 2.0 SHIELDED 28AWG/2C+24AWG/2C (UL) E305668 TYPE

CM 75°C CSA 204790 TYPE CM 75°C MSL

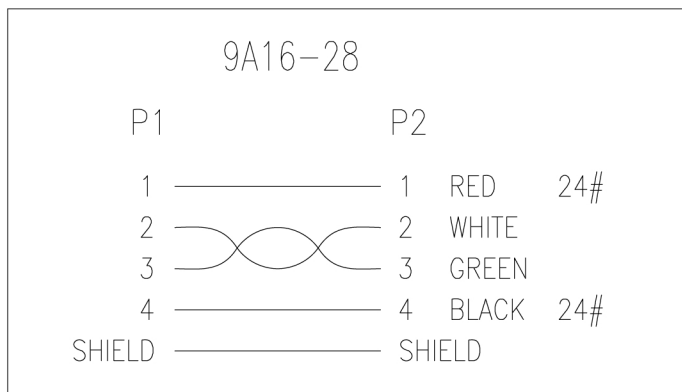

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHRINK TUBE $\phi$ 1.0*8mm	A4HA23-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	USB 2.0 CABLE,UL STYLE 1 TWISED PAIR 28AWG AND 2C 24AWG, AMA BRAID, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-139	H5KH29-0304K09	Xmm	M304
2	USB B MALE ,GOLD FLASH ON CONTACTS, WHITE INSULATOR, SOLDER ONE PIECE TYPE	A1HB06-0108	1	M108
1	USB A MALE , GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA22-0454	1set	M454
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	XIAO		

DATE	25/AUG/16	ITEM NO.	CU500BAR-xx	UNIT:mm	
------	-----------	----------	-------------	---------	--

CHECKED