
P1: M-942A	
P2:	M-Y928A
	M-928A

Customer No:	No: 1

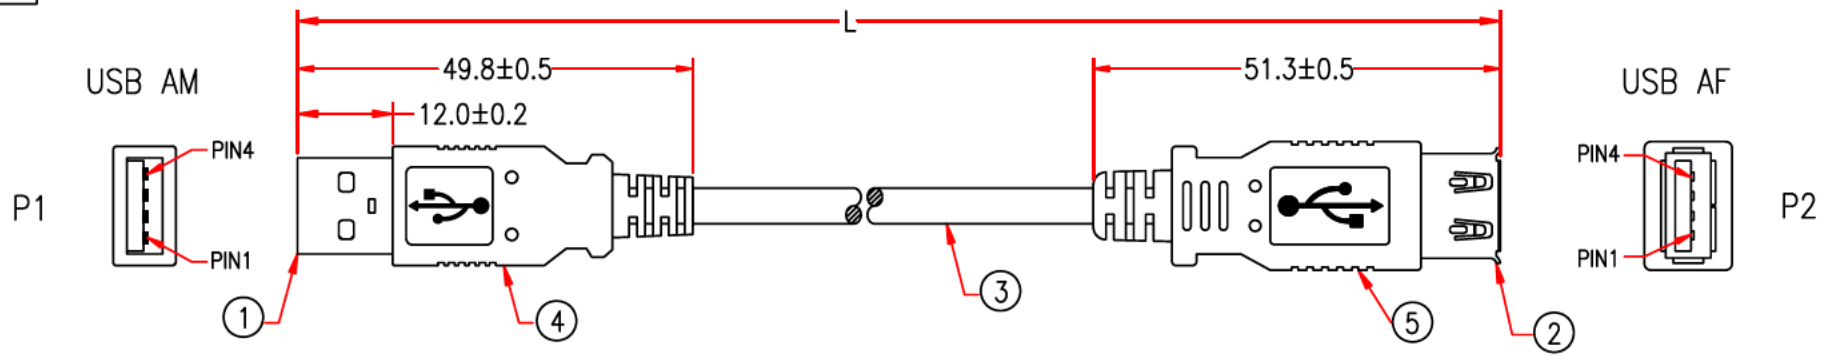


CABLE MARKING:

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1PR+24AWG/2C

E300060 ㏀ AWM 2725 80°C 30V VW-1

CSA 204790 AWM I/II A/B 80°C 30V FT1

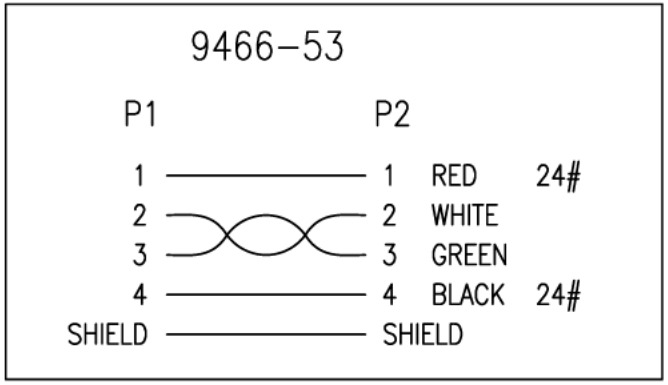

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION		Q'TY	Supplier
5	BLACK HEAT SHIRK TUBE ø1.0*10mm	A4HA23-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	JSB 2.0 CABLE, JL 2725 STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-422	H5KT03-0304K09	L-20mm	M304
2	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	A1HC03-0432	1	M432
1	JSB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA22-0454	1SET	M454

APPROVED			Cable Length Unless Other Spec. Tolerance.:	
CHECKED	HU		0 ~200mm	±10mm
DRAWING	ZHU		201~1000mm	±20mm
DATE	28/JAN/19	ITEM NO.	1001 ~1500mm	±25mm
			1501~2100mm	±30mm
			2100mm↑	±40mm
			UNIT:mm	

CHECKED