



|     |         |
|-----|---------|
| P2: | M-Y928A |
|     | M-928A  |

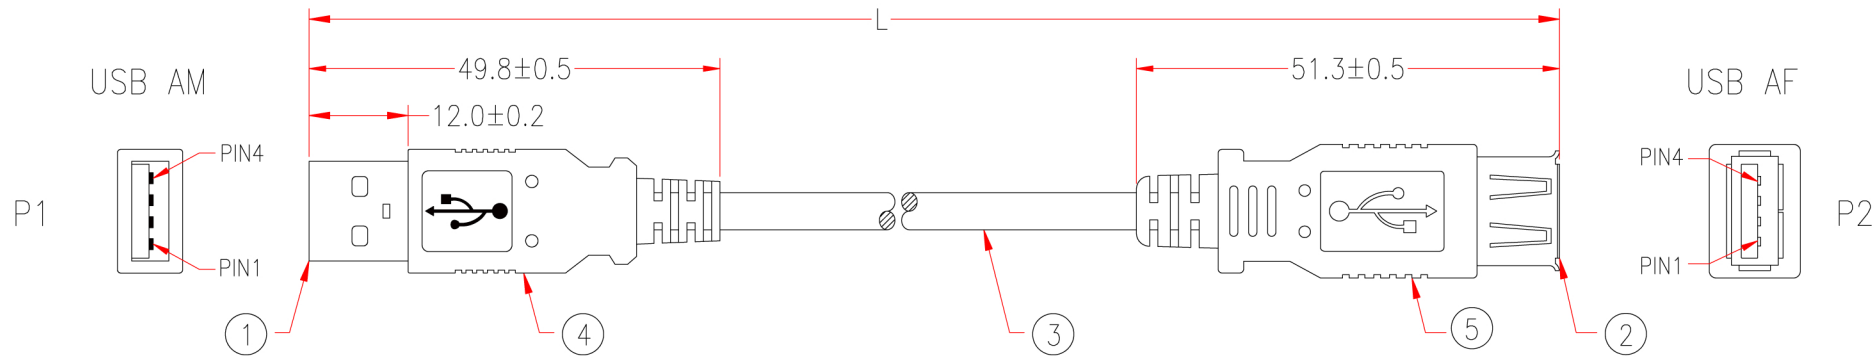

| Item No. | Length L | Jacket Color |
|----------|----------|--------------|
| CU510B-1 | 1m       | black        |
| CU510B-2 | 2m       | black        |
| CU510B-3 | 3m       | black        |
| CU510B-5 | 5m       | black        |

NOTE: All relevant materials are complied with RoHS directive .

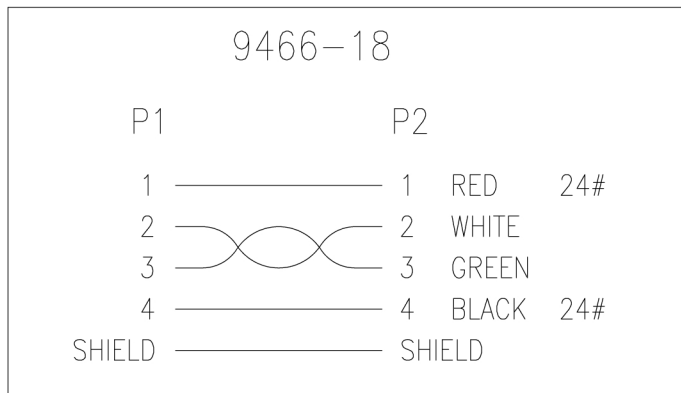

| 5   | BLACK HEAT SHIRK TUBE $\phi$ 1.0*10mm  | A4HA23-0959 | 1      | M959     |
|-----|--|-------------|--------|----------|
|     | MOLDED PE COLOR TRANSPARENT  | A5BA02-0280 |        | M280     |
|     | MOLDED PVC (SEE LIST)  | H1BF01-0304 |        | M304     |
| 4   | MOLDED PVC (SEE LIST)  | H1BF01-0304 |        | M304     |
| 3   | USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG,AMA BRAID OD 4.5mm, JACKET (SEE LIST), DRAWING No.EUAB2801P2402C-139 | H5KH29-0304 | L-20mm | M304     |
| 2   | USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR  | A1HC21-0108 | 1      | M108     |
| 1   | USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT PIERCE TYPE   | A1HA49-0108 | 1      | M108     |
| No. | DESCRIPTION  |             | Q'TY   | Supplier |

|          |           |          |          |  |
|----------|-----------|----------|----------|--|
| APPROVED |           |          |          | Cable Length Unless Other Spec.<br>Tolerances:<br>0 ~200mm ±10mm<br>201~1000mm ±20mm<br>1001 ~1500mm ±25mm<br>1501~2100mm ±30mm<br>2100mm↑ ±40mm |
| CHECKED  | HU        |          |          |  |
| DRAWING  | MEI       |          |          |  |
| DATE     | 16/JUN/12 | ITEM NO. | CU510B-X | UNIT:mm  |

CHECKED

