


L = 5000

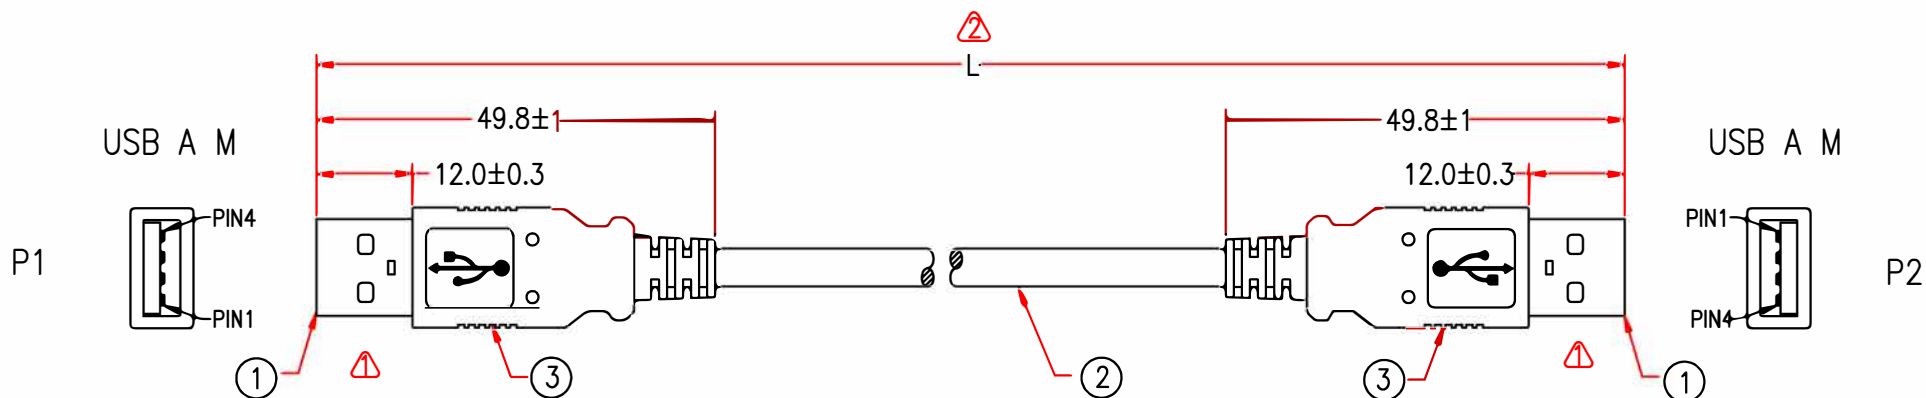

9509-17		2024.01.22		市场部	
P1	1	—	RED	24#	
	2	—	2 WHITE		
	3	—	3 GREEN		
	4	—	4 BLACK	24#	
	SHIELD	—	SHIELD		

**CABLE MARKING:** ⚠️⚠️⚠️

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1PR+24AWG/2C  
 E300060 ㄨ AWG 2725 80°C 30V VW-1  
 cㄨ AWG E300060 1/II A/B 80°C 30V FT1 MSL-VN-

NOTE: All revlvent materials are complied with RoHS directive.

No.	DESCRIPTION	Q'TY	Supplier
3	MOLDED PVC BEIGE	H1BF01-0304B01	M304
2	USB 2.0 CABLE, UL 2725 STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID, OD 4.5mm, JACKET BEIGE, DRAWING No. EUAB2801P2402C-422	L-20mm	M304
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECE TYPE	2set	M454

APPROVED		<b>CU520B-5</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 2100mm↑ ±30mm ±40mm		
CHECKED	HU				
DESINGER	ZHU				
DRAWING	YN				
DATE	08/YAN/24	ITEM NO.	9509-17	UNIT:mm	

⚠️ REV.4 2023.3.9	MODIFY MARKING	⚠️ REV.5 2024.01.08	MODIFY MARKING
⚠️ REV.2 2019.11.28	MODIFY CABLE LENGTH	⚠️ REV.3 2021.11.16	MODIFY MARKING
⚠️ REV.1 2019.06.18	MODIFY PIUGS AND WIRES	CHECKED	