



Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm Min.
4. Hi-Pot: 300VDC/10ms.

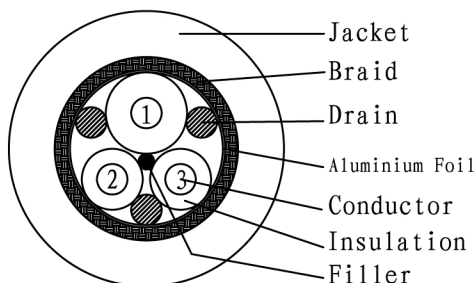

Pin Assignment

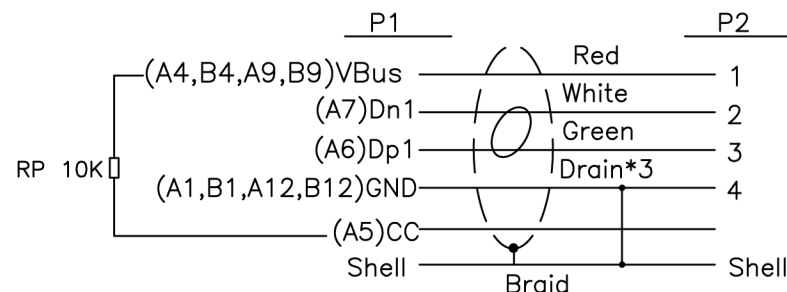

11	A0020100-00173	USB TYPE C~Under the tinplate plating nickel	1	pcs
10	A0020100-00172	USB TYPE C~On the tinplate plating nickel	1	pcs
9	A10-R042106	W=5MM 25u copper foil	0.012	M
8	A10-R075552	H.S TUBE ϕ 1.0 Color:Black	0.016	M
7	A5-R047001	45P PVC Color:Black	16	g
6	A5-R047011	Transparent PE	8	g
5	B010-00880	USB2.0 C TYPE Connector With PCBA(Resistance10KΩ)	1	pcs
4	A6-R107047	USB2.0 AM Front Shell Nickel Plated Shell	1	pcs
3	A6-R107048	USB2.0 AM Back Shell Nickel Plated Shell	1	pcs
2	A2-R029131	USB2.0 AM Solder White Insulation	1	pcs
1	A4-R004704	~30AWG (19/0.06TC)*2C+22AWG (41/0.10TC+250D)*1C+E (19/0.05TC+250D)*3+AB (16/9/0.06TC) 95%TC~OD:3.2MM~Color:Black Marking:E342987 兄 AWM STYLE 2725 80°C 30V VW-1 RoHS	2	M
NO	ITEM	DESCRIPTION	Q'TY	UNIT

REV.	DESCRIPTION		DATE	
	TOLERANCE		TITLE: USB 2.0 Type AM to Type C Cable,480M 3A,L=2M,without EMARK IC,Black CUSTOMER : CUSTOMER P/N : SCALE NONE UNIT mm DATE 2015.07.06	
	.X	.015 .30		
	.XX	.010 .10		
	.XXX	.005 .05	DRAWING NO.: CU600B-2	
DRAWN BY	Hong		REV. A01	
CHECK BY			1/1	
APPD BY				