


P1,P2: M-Y127A
M-127A
P3: M-426B

Customer No: No.1

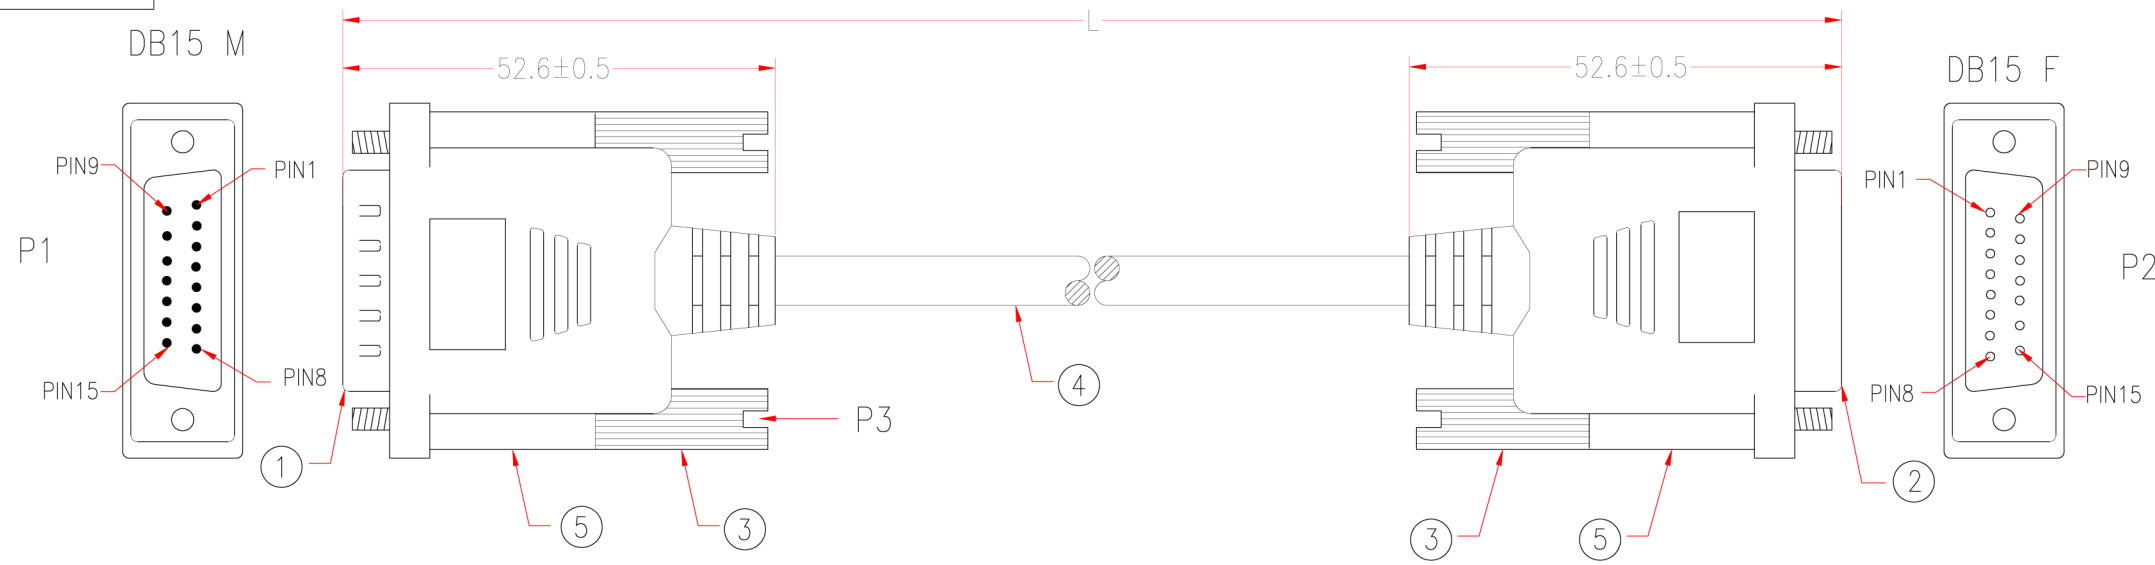

1050-12

P1	P2	
1	1	BROWN
2	2	RED
3	3	ORANGE
4	4	YELLOW
5	5	GREEN
6	6	BLUE
7	7	PURPLE
8	8	GREY
9	9	BLACK
10	10	WHITE
11	11	PINK
12	12	LIGHT GREEN
13	13	LIGHT BLUE
14	14	BROWN/BLACK
15	15	RED/BLACK
SHIELD	SHIELD	

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	2	M304
	ALUMINUM FOIL 33*65mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
4	UL2464 15C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.0mm, JACKET BEIGE, DRAWING No. EMAL2815C-203	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
2	DB15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	DB15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	JIANG		

DATE 25/MAY/11 ITEM NO. **D15/15MF-x** UNIT:mm

CHECKED

