


P1,P2:	M-Y127A
	M-127B
P3:	M-426E

Customer No: \_\_\_\_\_

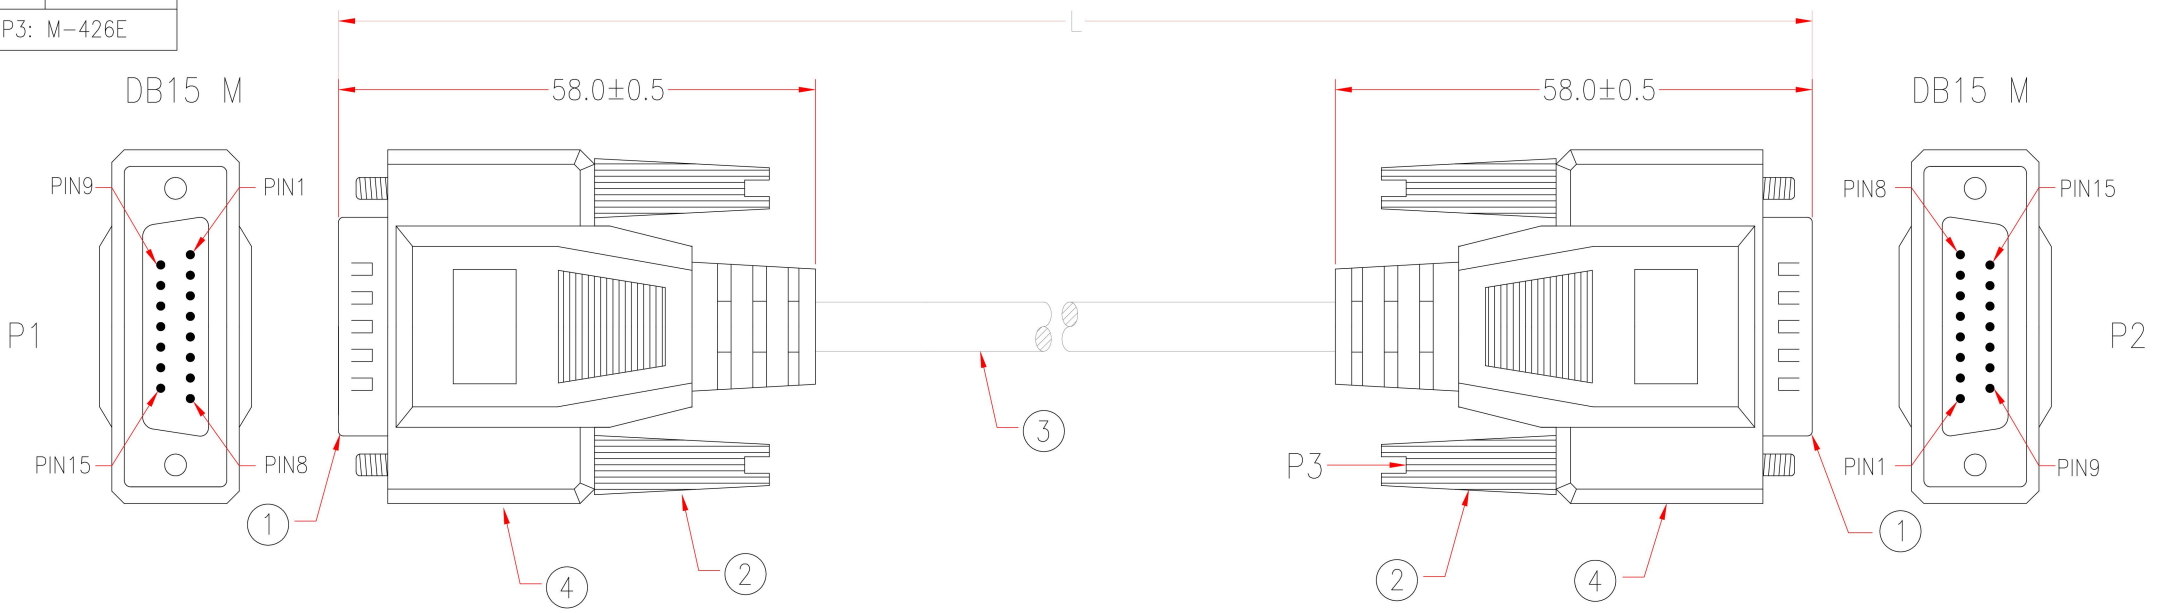

1069	
P1	P2
1 _____	1 BROWN
2 _____	2 RED
3 _____	3 ORANGE
4 _____	4 PINK
5 _____	5 YELLOW
6 _____	6 GREEN
7 _____	7 LIGHT GREEN
8 _____	8 BLUE
9 _____	9 LIGHT BLUE
10 _____	10 PURPLE
11 _____	11 GREY
12 _____	12 WHITE
13 _____	13 BLACK
14 _____	14 BROWN/BLACK
15 _____	15 RED/BLACK
SHIELD _____	SHIELD

△ \* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
4	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	2	M304
	ALUMINUM FOIL 33*65mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
3	NON-UL 15C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.0mm, JACKET BEIGE, DRAWING No. EMAL2815C-078	L-20mm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
1	DB15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108

APPROVED		<b>D15/15MM-X</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm $\uparrow$ $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	JIANG		
DATE	15/NOV/11		
ITEM NO.			UNIT:mm