


P1,P2: M-Y301A
 M-301A
 P3: M-426A

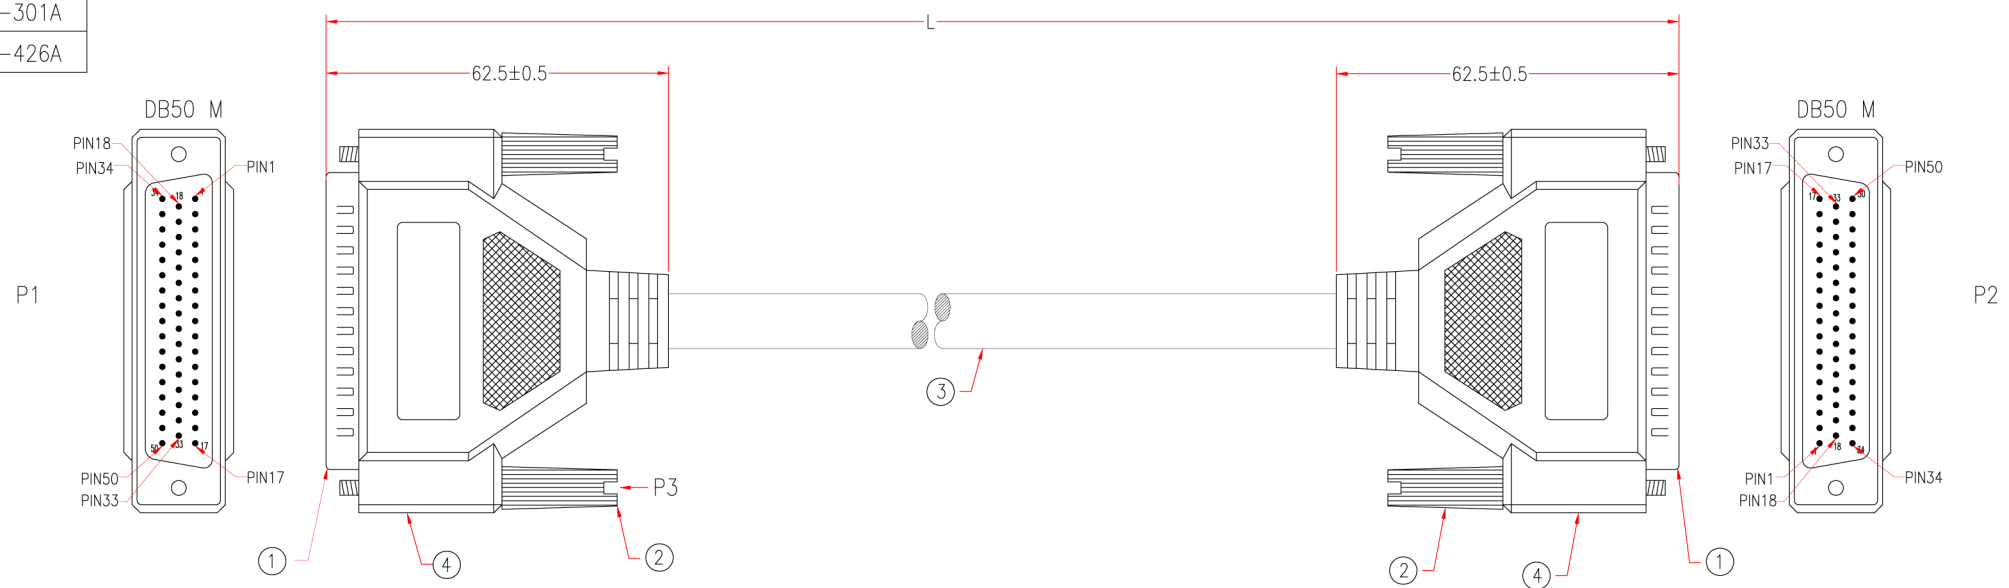

3034

P1	P2	Color	P1	P2	Color
1	1	BROWN	26	26	LIGHT GREEN/RED
2	2	BROWN/RED	27	27	LIGHT GREEN/WHITE
3	3	BROWN/WHITE	28	28	LIGHT GREEN/BLACK
4	4	BROWN/BLACK	29	29	BLUE
5	5	RED	30	30	BLUE/RED
6	6	RED/WHITE	31	31	BLUE/WHITE
7	7	RED/BLACK	32	32	BLUE/BLACK
8	8	ORANGE	33	33	LIGHT BLUE
9	9	ORANGE/RED	34	34	LIGHT BLU/RED
10	10	ORANGE/WHITE	35	35	LIGHT BLUE/WHITE
11	11	ORANGE/BLACK	36	36	LIGHT BLUE/BLACK
12	12	PINK	37	37	PURPLE
13	13	PINK/RED	38	38	PURPLE/RED
14	14	PINK/WHITE	39	39	PURPLE/WHITE
15	15	PINK/BLACK	40	40	PURPLE/BLACK
16	16	YELLOW	41	41	GRAY
17	17	YELLOW/RED	42	42	GRAY/RED
18	18	YELLOW/WHITE	43	43	GRAY/WHITE
19	19	YELLOW/BLACK	44	44	GRAY/BLACK
20	20	LIGHT YELLOW/RED	45	45	WHITE
21	21	GREEN	46	46	WHITE/RED
22	22	GREEN/RED	47	47	WHITE/BLACK
23	23	GREEN/WHITE	48	48	BLACK
24	24	GREEN/BLACK	49	49	BLACK/RED
25	25	LIGHT GREEN	50	50	BLACK/WHITE
			SHIELD	SHIELD	

⚠ * NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
4	BLACK PVC TUBE ϕ 3.0*42mm	2	M304
	ALUMINUM FOIL 33*140mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
3	NON-UL 50C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 10.0mm, JACKET BEIGE, DRAWING No. EMAL2850C-106	Lmm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
1	DB50 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108

APPROVED		D50/50MM-xx	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	JIANG		