


P1:	M-Y1404A
	M-1404A
P2:	M-Y127A
	M-127B
P3:	M-494A
P4:	M-426E

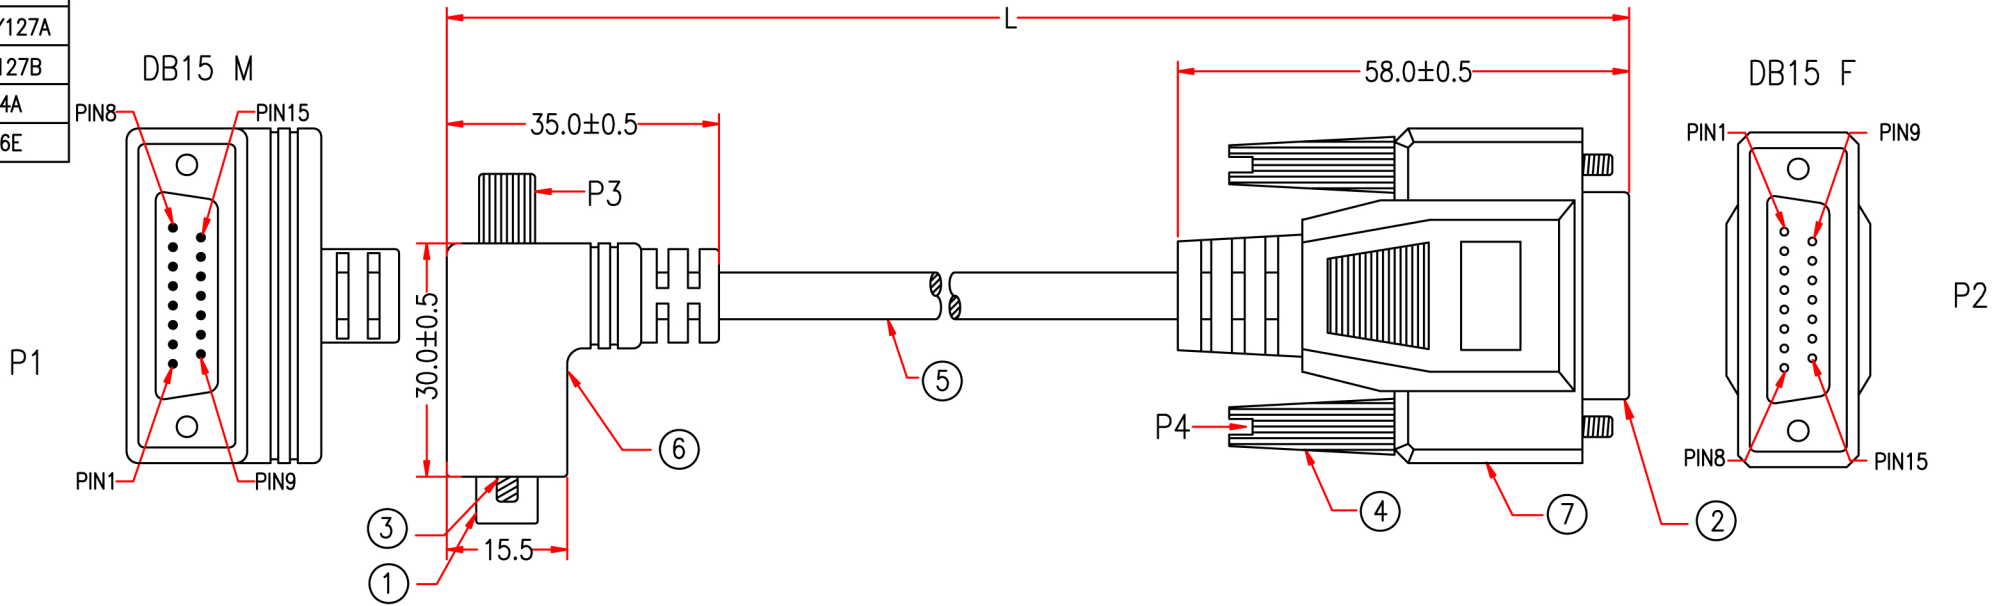

MARKING: E300060 兄 AWM 2464 28AWG 80°C 300V VW-1
CSA 204790 I/II A 80°C 300V FT1 MSL

1050-17

P1	P2	P1	P2
1 _____	1 BROWN	10 _____	10 PINK
2 _____	2 RED	11 _____	11 LIGHT GREEN
3 _____	3 ORANGE	12 _____	12 LIGHT BLUE
4 _____	4 YELLOW	13 _____	13 BROWN/BLACK
5 _____	5 GREEN	14 _____	14 RED/BLACK
6 _____	6 BLUE	15 _____	15 BLACK
7 _____	7 PURPLE	SHIELD _____	SHIELD
8 _____	8 GREY		
9 _____	9 WHITE		

*NOTE: ALL relevant materials are complied with RoHS directive

7	PVC BLACK TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
6	PVC BLACK TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	UL2464 15C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.0mm, JACKET BLACK, DRAWING No. EMAL2815C-203	H5FL19-0304K09	L-10mm	M304
4	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK	A6AA30-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 42mm, BLACK	A6AA23-0095	2	M95
2	DB15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AB01-0277U09	1	M277
1	DB15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AB04-0277U09	1	M277

No.	DESCRIPTION	Q'TY	Supplier
-----	-------------	------	----------

APPROVED		DB15/15MAP12F-X	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201 ~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501 ~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	XIAO		

DATE	07/AUG/19	ITEM NO.	1050-17	UNIT:mm	
------	-----------	----------	---------	---------	--

CHECKED