


P1:	M-Y1404A
	M-1404A
P2:	M-Y127A
	M-127B
P3:	M-494A
P4:	M-426E

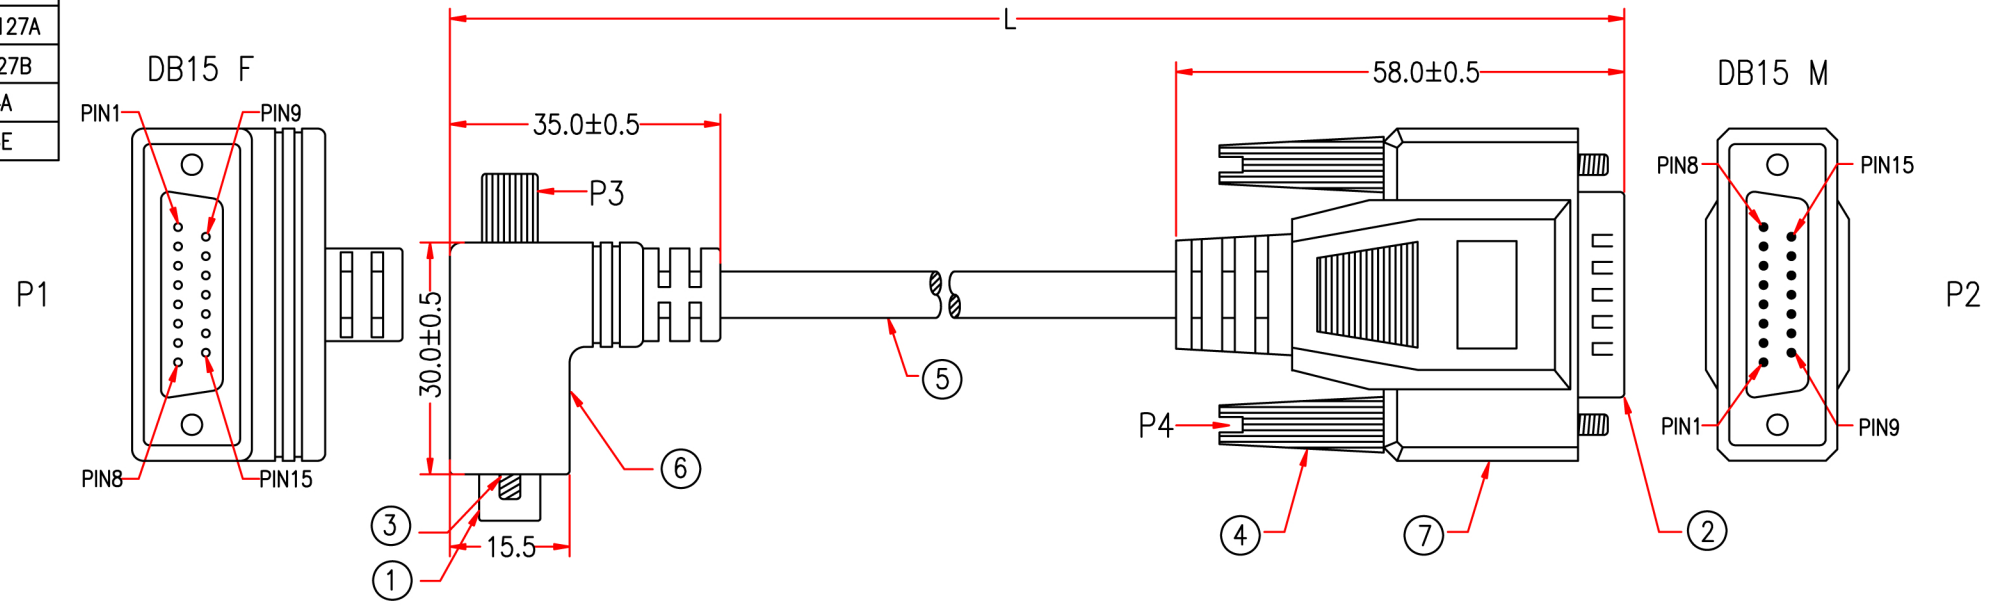

MARKING: E300060 兎 AWM 2464 28AWG 80°C 300V VW-1
 CSA 204790 I/II A 80°C 300V FT1 MSL

1050-22

P1	P2	P1	P2
1 _____	1 BROWN	10 _____	10 PINK
2 _____	2 RED	11 _____	11 LIGHT GREEN
3 _____	3 ORANGE	12 _____	12 LIGHT BLUE
4 _____	4 YELLOW	13 _____	13 BROWN/BLACK
5 _____	5 GREEN	14 _____	14 RED/BLACK
6 _____	6 BLUE	15 _____	15 BLACK
7 _____	7 PURPLE	SHIELD _____	SHIELD
8 _____	8 GREY		
9 _____	9 WHITE		

*NOTE: ALL relevant materials are complied with RoHS directive

7	PVC BLACK TUBE ϕ 3.0*22mm	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
6	PVC BLACK TUBE ϕ 3.0*22mm	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	UL2464 15C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.0mm, JACKET BLACK, DRAWING No. EMAL2815C-203	H5FL19-0304K09	L-10mm	M304
4	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK	A6AA30-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 42mm, BLACK	A6AA23-0095	2	M95
2	DB15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AB04-0277U09	1	M277
1	DB15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AB01-0277U09	1	M277

No.	DESCRIPTION		Q'TY	Supplier
APPROVED		DB15/15MFAP12-X	Cable Length Unless Other Spec. Tolerances: 0 ~200mm \pm 10mm 201~1000mm \pm 20mm 1001 ~1500mm \pm 25mm 1501~2100mm \pm 30mm 2100mm \uparrow \pm 40mm	
CHECKED	HU			
DRAWING	XIAO			
DATE	07/AUG/19	ITEM NO.	1050-22	UNIT:mm

CHECKED