
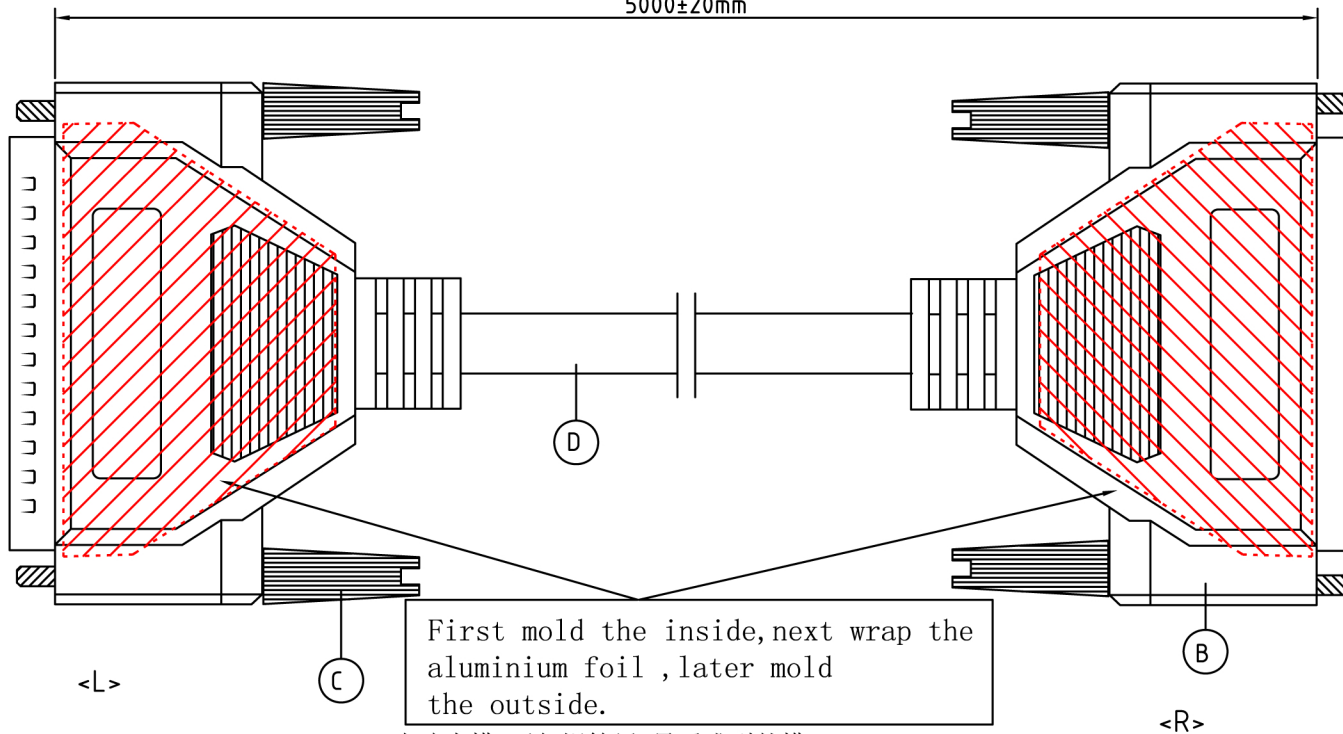


1000±10mm  
2000±20mm  
3000±20mm  
5000±20mm

REV.	DATE	FILE No.
1.0	2012-10-15	CC315-MF-1M

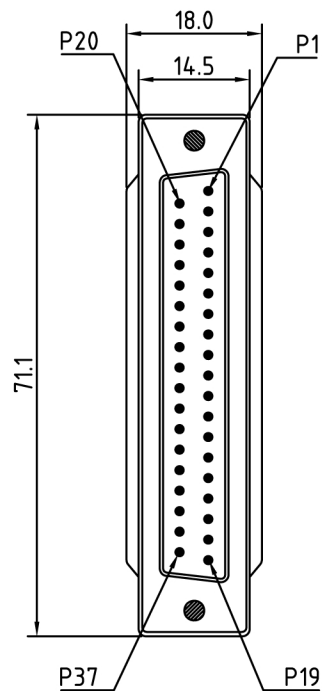

First mold the inside, next wrap the aluminium foil, later mold the outside.

先啤内模, 再包铝箔纸, 最后成型外模.

WIRING DIAGRAM

37PIN MALE(L)	37PIN FEMALE(R)	37PIN MALE(L)	37PIN FEMALE(R)
1	1	20	20
2	2	21	21
3	3	22	22
4	4	23	23
5	5	24	24
6	6	25	25
7	7	26	26
8	8	27	27
9	9	28	28
10	10	29	29
11	11	30	30
12	12	31	31
13	13	32	32
14	14	33	33
15	15	34	34
16	16	35	35
17	17	36	36
18	18	37	37
19	19	shell	shell

SPECIFICATION:

ITEM	PART NAME	MATERIAL	COLOR	QTY.
A	D-SUB 37 PIN MALE CONNECTOR	P.B.	NICKEL	1SET.
B	MODEL TY-417 TYPE	PVC	BLACK	2
C	TS040X427TNOPOA SCREW	MILD STEEL	NICKEL	4
D	37T+1T/S (0.12/7TX37C+0.16/7T+AL) #9.0MM	PVC	BLACK	
E	D-SUB 37 PIN FEMALE CONNECTOR	P.B.	NICKEL	1SET.

CUSTOMER: DIGGELMANN		<b>Tai Yip Electrical Co., Ltd.</b>
CUST. P/N: DB37/37MF-1		
S/O:	S/N:	PART No.: CC315-MF-1M/BK
DRAWING No.	CC-315-05	PART NAME: 232 CABLE DB37M-DB37F(MOLDED)
DRAWN BY	Lingqi Meng	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MM. TOLERANCE: DECIMAL .X ±0.1 .XX ±0.05 ANGLE ±1/2°
CHECKED BY	Zhongjiao	
APPROVED BY	Chenhan	
		SHEET 1 OF 1
		SCALE NO