


Cable length table

DSPMM-1	1m
DSPMM-2	2m
DSPMM-3	3m
DSPMM-5	5m

Pin Assignment

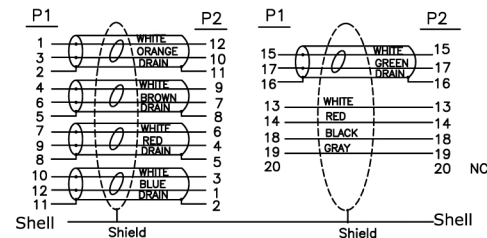

Electrical Test:

- 100%Test(Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot: 100V DC/10ms

6	Dust Cover For DP Connector	2	pcs																			
5	Copper Foil 360° Solder Type	2	pcs																			
4	Inside Molding: PE	5	g																			
3	S.R. Molding 45P PVC, Colocr: Black	18	g																			
2	Display Port Male, Insulation: Black, Pin Gold Plated, Shell Gold Flash With ABS Plastic Hood	2	Set																			
1	Display Port Cable UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar]*5+28AWG (7/0.127TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: Black OD:7..3±0.2mm	L	M																			
NO	DESCRIPTION	Q'TY	UNIT	APPD BY																		
										TOLERANCE		INCHES		M/M								
										.x		.015		.30		TITLE: Display Port M TO M Gold						
										.XX		.010		.10								
										.XXX		.005		.05		CUSTOMER P/N : DSPMM-x						
										DRAWN BY						SCALE		NONE		DRAWING NO.:		REV
										CHECK BY						UNIT		MM				A
										APPD BY						DATE		2011.05.13		1/1		