


3627-1

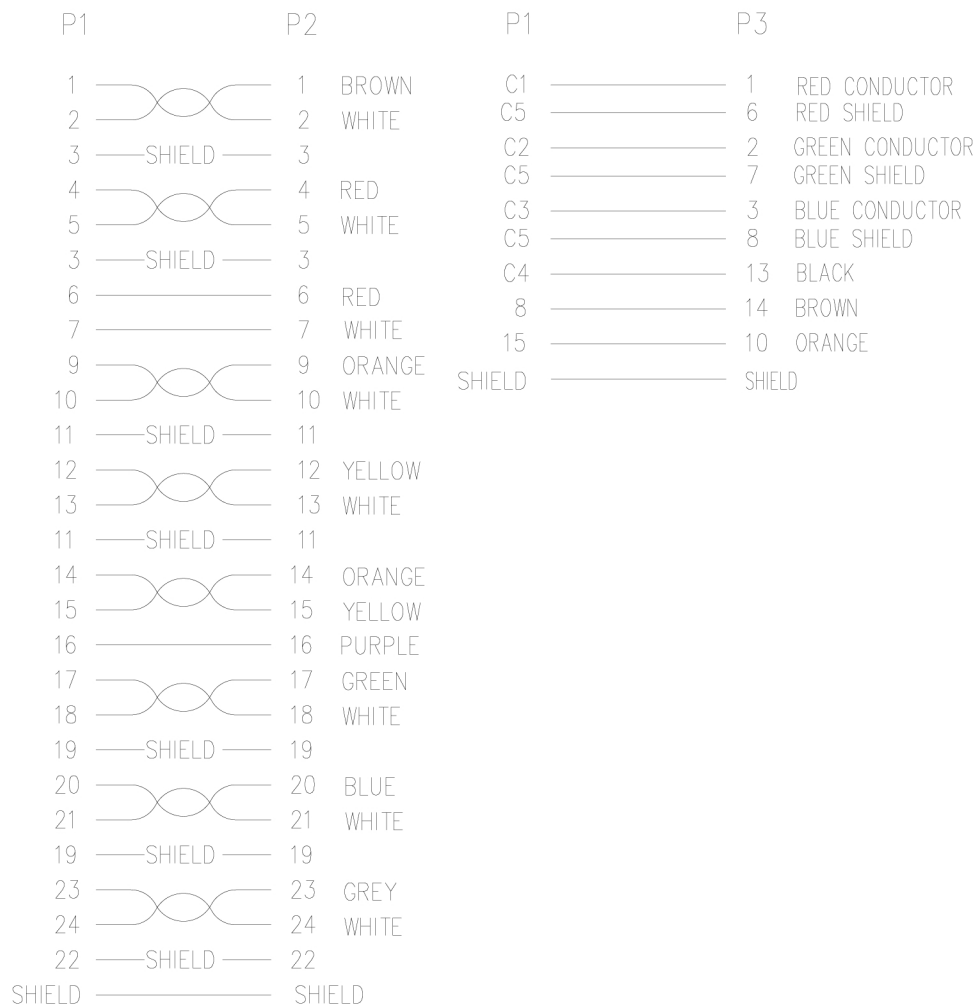

*NOTE: All relevant materials are complied with RoHS directive .

11	BLACK HEAT SHRINK TUBE 0.8*10mm	A4HA08-0959	6	M959
	BLACK HEAT SHRINK TUBE 3.0*5mm	A4HA10-0959	6	M959
	BLACK PVC TUBE 3.0*22mm	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA14-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
9&10	BLACK HEAT SHRINK TUBE 0.8*8mm	A4HA08-0959	14	M959
	BLACK HEAT SHRINK TUBE 2.0*10mm	A4HA09-0959	14	M959
	BLACK PVC TUBE 3.0*20mm	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*90mm	A6MA05-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA14-7777		M7777
MOLDED PVC BLACK	H1BF01-0304K09		M304	
8	UL2919 3 MINI COAXIAL 28AWG AND 3C 28AWG, ALUM-MYALR FOIL AND AMA BRAID SHIELDING WITH DRIAN WIRE, OD 6.5mm, JACKET BLACK, DRAWING No. EAAB2803T2803C-873	H5LC54-0304K09	480mm	M304
7	UL20276 [(28AWG*1P+AL+D+M)*7c+(28AWG*1PAIR)+(28AWG*3C)]+AL+D+AMA BRAID OD 8.6mm, JACKET BLACK, DRAWING No.EAAB2807P2801P2803C-290	H5DF02-0304K09	980mm	M304
6	HEX-UNT 5*6.6mm	A6BC15-0095	2	M95
5	MOLDED THUMBSCREW #4-40, LENGTH 49mm, BLACK	A6AB30-0095	2	M95
4	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK	A6AA30-0095	2	M95
3	HD15 FEMALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLUE INSULATOR	A1CA07-0108	1	M108
2	DVI 29 FEMALE AND HEX-NUT 4.75*5.7mm, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, WHITE INSULATOR	A1KE12-0636	1set	M636
1	DVI29 MALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	A1KE08-0636	1set	M636
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		DVIDA-YB-100/50	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm ↑ ±40mm
CHECKED	HU		
DRAWING	XIAO		
DATE	06/SEP/19	ITEM NO.	3627-1
	CHECKED	UNIT:mm	