P1:	M-Y269D
	M-269D
P2:	M-Y139C
	M-139C
P3:	M-Y269C
	M-269C
P4: M-426C	

Customer No: | No: 4

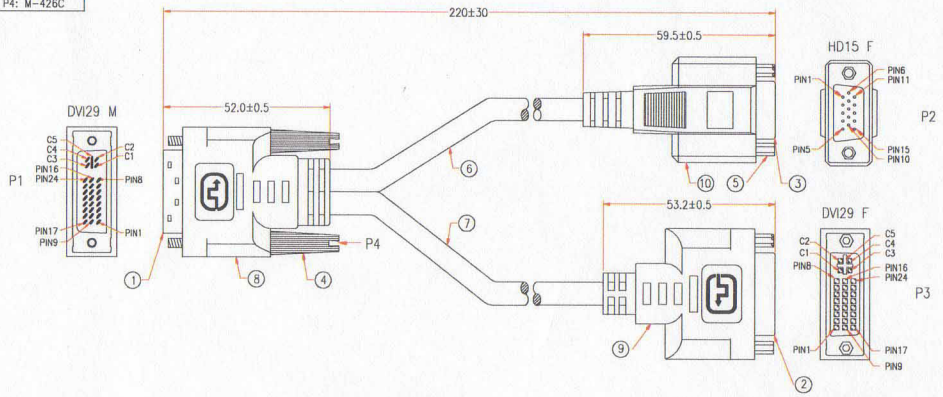

APPROVED				Cable Length Unless Other Spec. Tolerances:	
CHECKED	TIAN			0 ~200mm	±10mm
DRAWING	JUDY			201~1000mm	±20mm
				1001 ~1500mm	±25mm
				1501~2100mm	±30mm
				2100mm	±40mm
DATE	14/NOV/07	ITEM NO.	3471	UNIT:mm	

PAGE: 1 OF 2

CHECKED

Customer No: | No: 4

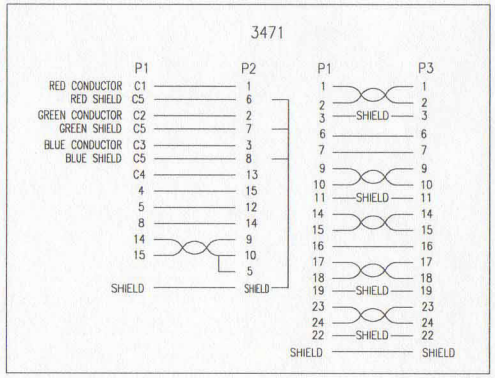

*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
10	UL1007 26AWG INSULATOR WIRE, LENGTH 28mm	1	M541
	BLACK HEAT SHRINK TUBE 0.8*10mm	3	M743
	BLACK HEAT SHRINK TUBE 3.0*5mm	3	M743
	BLACK PVC TUBE 3.0*22mm	1	M304
	COPPER FOIL 33*65mm	1	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLUE(UH-4)		M304
8&9	UL1007 26AWG INSULATOR WIRE, LENGTH 28mm	2	M541
	BLACK HEAT SHRINK TUBE 0.8*8mm	11	M743
	BLACK HEAT SHRINK TUBE 3.0*10mm	11	M743
	COPPER FOIL 33*90mm	2	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC WHITE(HA8250)		M304
7	UL20276 [(28AWG*1PAIR+D+FAW)*4PCS+(28AWG*1PAIR)+(28AWG*3C)]+AM+B, OD 7.0mm, JACKET BLACK	205mm	M2
6	UL20276 3 MINI COAXIAL 30AWG+(28AWG*1PAIR)+(28AWG*5C), ALUM-MYLAR FOIL AND COPPER BRAID SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BLACK	205mm	M2
5	HEX-UNT 4.75*8.5mm	2	M95
4	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, WHITE(HA8250)	2	M95
3	HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
2	DVI 29 FEMALE AND HEX-NUT 4.75*10mm, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	M78
1	DVI29 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	1set	M83

APPROVED				Cable Length Unless Other Spec. Tolerances:	
CHECKED	TIAN			0 ~200mm	±10mm
DRAWING	JUDY			201~1000mm	±20mm
				1001 ~1500mm	±25mm
				1501~2100mm	±30mm
				2100mm	±40mm
DATE	14/NOV/07	ITEM NO.	3471	UNIT:mm	

PAGE: 2 OF 2

CHECKED