

# Operation & Assembly Instruction

## FC-8888 PP


**\*Fully assembled**

**\*Includes VESA standards:  
75x75 mm and/or 100x100 mm  
hole pattern bracket.**


**\*Pipe diameter range :48~42 mm**

**\*Installation Methods :**


**Step 1**

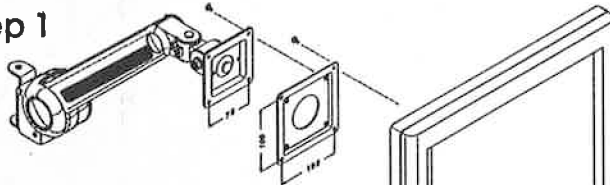

**Step 2**

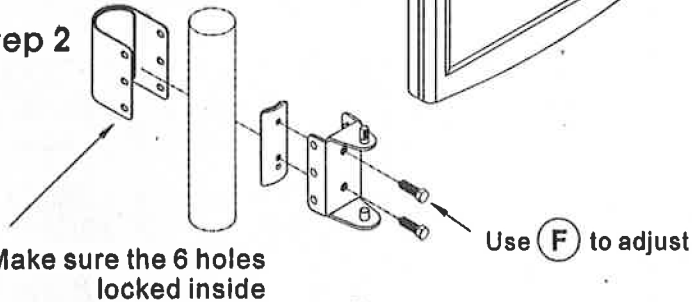


**Step 3**

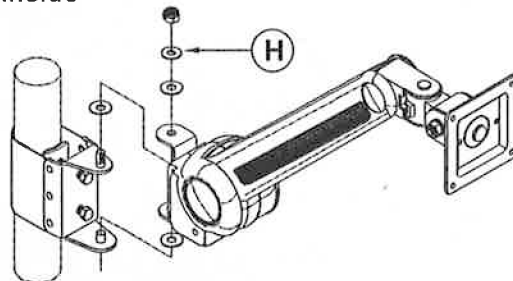


**\*Features:**

Use (F) to adjust & (J) cover screw

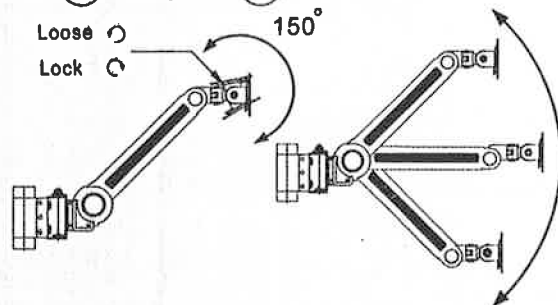



**\*Operating Skill**

**Down: Tilt the panel and then pull it down**

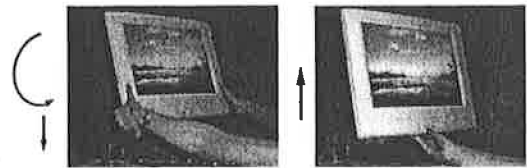

**Up : Lift the panel up directly**

- \* 1. Lay the arm face down
- 2. Pull the back cover out
- 3. Insert the cable

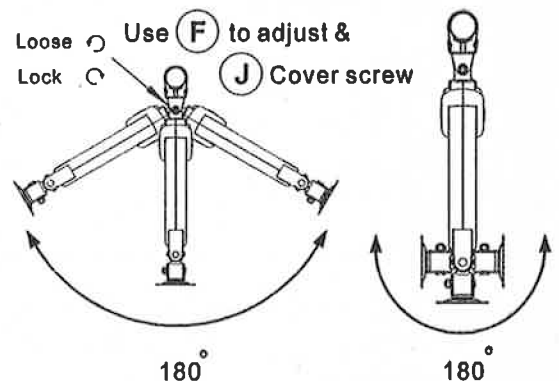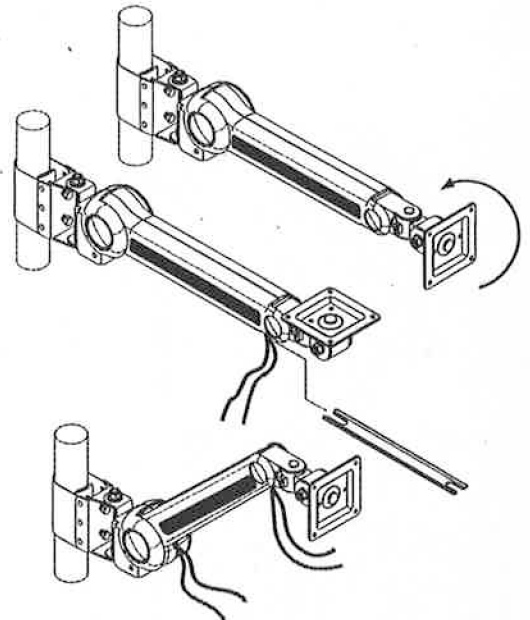

ITEM	(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)	(I)	(J)	(K)	(L)
PARTS												
QTY	1	1	1	2	2	1	1	1	3	2	4	4