


P1:	M-Y127A
	M-127B
P2:	M-Y1404A
	M-1404A
P3:	M-494A
P4:	M-426E

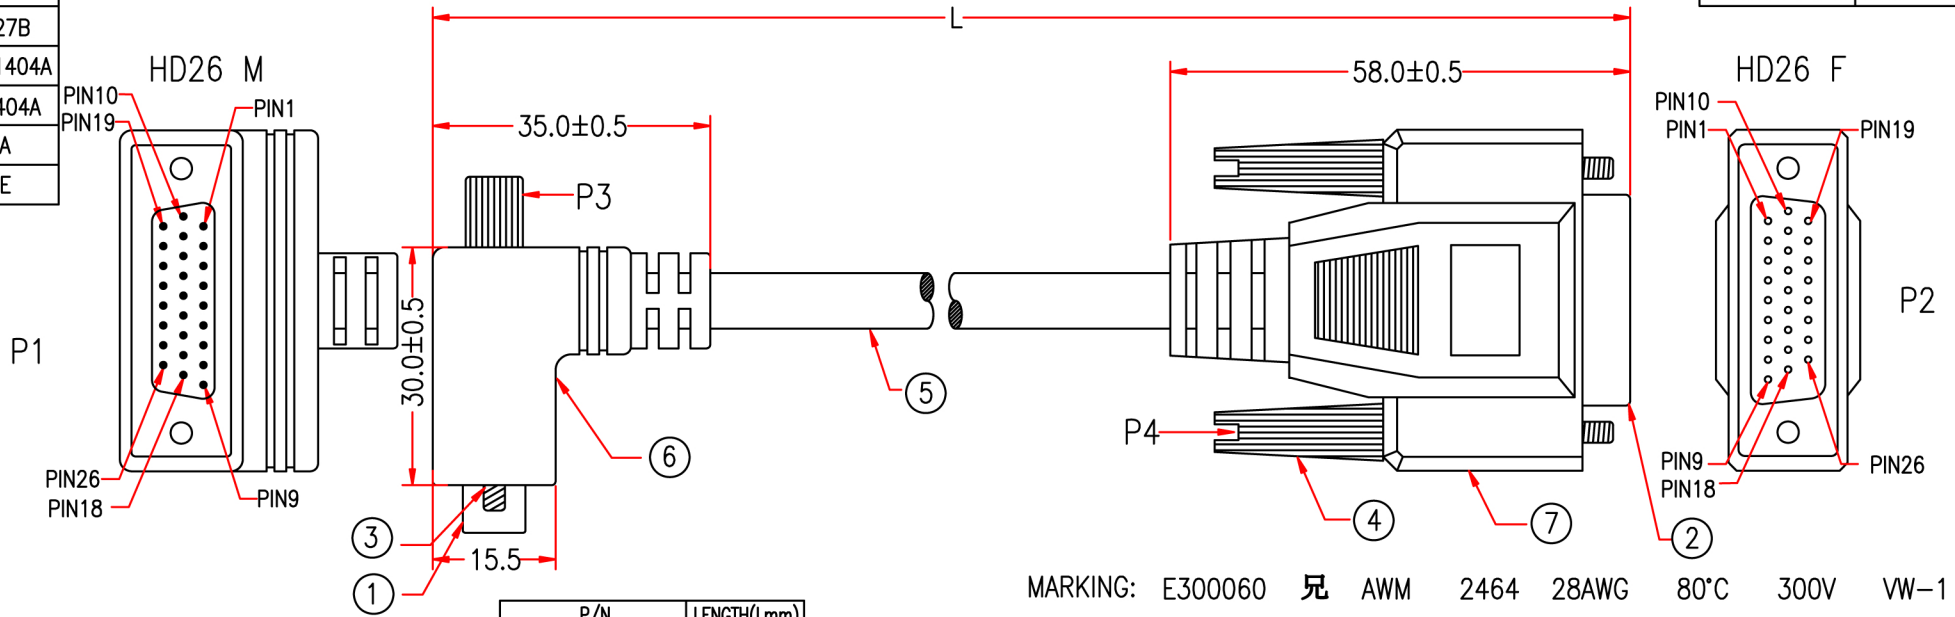

P/N	LENGTH(Lmm)
HD26/26MA5F-05	500mm
HD26/26MA5F-1	1000mm
HD26/26MA5F-2	2000mm
HD26/26MA5F-3	3000mm
HD26/26MA5F-10	10000mm

MARKING: E300060 兎 AWM 2464 28AWG 80°C 300V VW-1

CSA 204790 I/II A 80°C 300V FT1 MSL

*NOTE: ALL relevant materials are complied with RoHS directive

3492-7

P1	P2	P1	P2
1	1 BROWN	15	15 RED/BLACK
2	2 RED	16	16 ORANGE/BLACK
3	3 ORANGE	17	17 YELLOW/BLACK
4	4 YELLOW	18	18 GREEN/BLACK
5	5 GREEN	19	19 BLUE/BLACK
6	6 BLUE	20	20 PURPLE/BLACK
7	7 PURPLE	21	21 GRAY/BLACK
8	8 GRAY	22	22 WHITE/BLACK
9	9 WHITE	23	23 PINK/BLACK
10	10 PINK	24	24 LIGHT GREEN/BLACK
11	11 BLACK	25	25 LIGHT BLUE/BLACK
12	12 LIGHT GREEN	26	26 BLACK/WHITE
13	13 LIGHT BLUE	SHELD	SHELD
14	14 BROWN/BLACK		

7	PVC BLACK TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	COPPER FOIL 33*65mm	A6LA11-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC GREY	H1BF01-0304G09		M304
6	PVC BLACK TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	COPPER FOIL 33*65mm	A6LA11-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC GREY	H1BF01-0304G09		M304
5	UL2464 26C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET GREY, DRAWING No. EMAL2826C-1436	H5FL90-0304G09	L-10mm	M304
4	MOLDED THUMBSCREW #4-40, LENGTH 42mm, GREY	A6AA23-0095	2	M95
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, GREY	A6AA30-0095	2	M95
2	HD26 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1CC01-0108	1	M108
1	HD26 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1CC02-0108	1	M108

No.	DESCRIPTION	Q'TY	Supplier
APPROVED			
CHECKED	HU		
DRAWING	XIAO		

Cable Length Unless Other Spec. Tolerances:	
0 ~ 200mm	±10mm
201 ~ 1000mm	±20mm
1001 ~ 1500mm	±25mm
1501 ~ 2100mm	±30mm
2100mm↑	±40mm

CHECKED

