


P1.P2	M-Y127A
	M-127B
P3:	M-426E

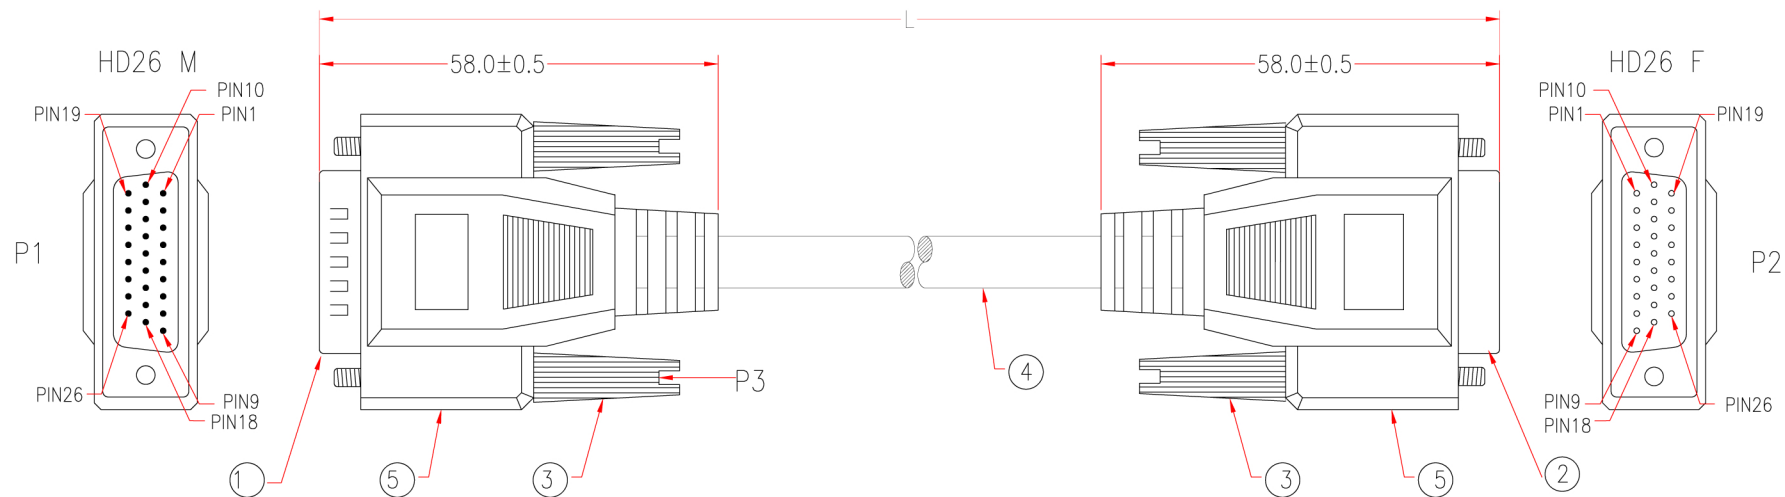

3492-2

P1	P2	P1	P2
1	1 BROWN	15	15 RED/BLACK
2	2 RED	16	16 ORANGE/BLACK
3	3 ORANGE	17	17 YELLOW/BLACK
4	4 YELLOW	18	18 GREEN/BLACK
5	5 GREEN	19	19 BLUE/BLACK
6	6 BLUE	20	20 PURPLE/BLACK
7	7 PURPLE	21	21 GRAY/BLACK
8	8 GRAY	22	22 WHITE/BLACK
9	9 WHITE	23	23 PINK/BLACK
10	10 PINK	24	24 LIGHT GREEN/BLACK
11	11 BLACK	25	25 LIGHT BLUE/BLACK
12	12 LIGHT GREEN	26	26 BLACK/WHITE
13	13 LIGHT BLUE	SHELD	SHELD
14	14 BROWN/BLACK		

*NOTE: ALL relevant materials are complied with RoHS directive

No.	DESCRIPTION	Q'TY	Supplier
5	PVC BLACK TUBE $\phi 3.0 \times 22\text{mm}$	2	M304
	ALUMMINUM FOIL 33*65mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC GRAY		M304
4	NONUL 26C 28AWG, ALUM-MYLAR FOIL WITH DRAIN WIRE, OD 7.0mm, JACKET GRAY, DRAWING No. EMAL2826C-676	L-10mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, GRAY	4	M95
2	HD26 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	HD26 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M83

No.	DESCRIPTION	Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	VinKing		
DATE	16/APR/13		

HD26/26MF-xx

DATE	16/APR/13	ITEM NO.	3492-2	UNIT:mm	
------	-----------	----------	--------	---------	--

CHECKED